



Zoning in a configuration with storage arrays

ONTAP FlexArray

NetApp
February 11, 2024

This PDF was generated from https://docs.netapp.com/us-en/ontap-flexarray/install/reference_requirements_for_zoning_in_a_configuration_with_storage_arrays.html on February 11, 2024. Always check docs.netapp.com for the latest.

Table of Contents

- Zoning in a configuration with storage arrays 1
 - Requirements for zoning in a configuration with storage arrays 1
 - Zoning recommendation for a configuration with storage arrays 1
 - Example of zoning in a configuration with storage arrays 1

Zoning in a configuration with storage arrays

Zoning enables a storage administrator to restrict the array LUNs that a particular ONTAP system can access. ONTAP requires that an array LUN be visible on only one target port for each initiator port.

Configuring zoning on a Fibre Channel (FC) switch enables you to define paths between connected nodes, restricting visibility and connectivity between devices connected to a common FC SAN.

Requirements for zoning in a configuration with storage arrays

You must follow the zoning requirements in your ONTAP configuration with storage arrays to ensure that the ONTAP system can access the correct set of LUNs.

- The *Interoperability Matrix* must identify a switch and the switch firmware as supported for the ONTAP configuration.
- Zoning must be configured to restrict each initiator port to a single target port on each storage array.
- On the switch, ports on the ONTAP system and ports on the storage array must be assigned to the same zone.

This enables the ONTAP systems to access the LUNs on the storage arrays.

- When storage array ports are shared across heterogeneous systems, array LUNs from the ONTAP system cannot be exposed to other systems.

LUN security or array LUN masking must be used to ensure that the array LUNs for ONTAP storage are visible only to the ONTAP systems.

- A host configuration port must not be included in the same zone as a target port.

Zoning recommendation for a configuration with storage arrays

The recommended type of zoning for a configuration with storage arrays is 1:1 zoning. With 1:1 zoning, each zone contains a single FC initiator port and a single storage array target port.

The benefits of creating 1:1 zoning are as follows:


- You limit the number of ports over which a specific array LUN can be accessed.
- There are discovery and boot time improvements because the FC initiators ONTAP systems do not attempt to discover each other.

Example of zoning in a configuration with storage arrays

Using LUN security when configuring the switches for zoning ensures that different hosts

do not see LUNs mapped to another host.

Zoning in a single 4-port LUN group configuration

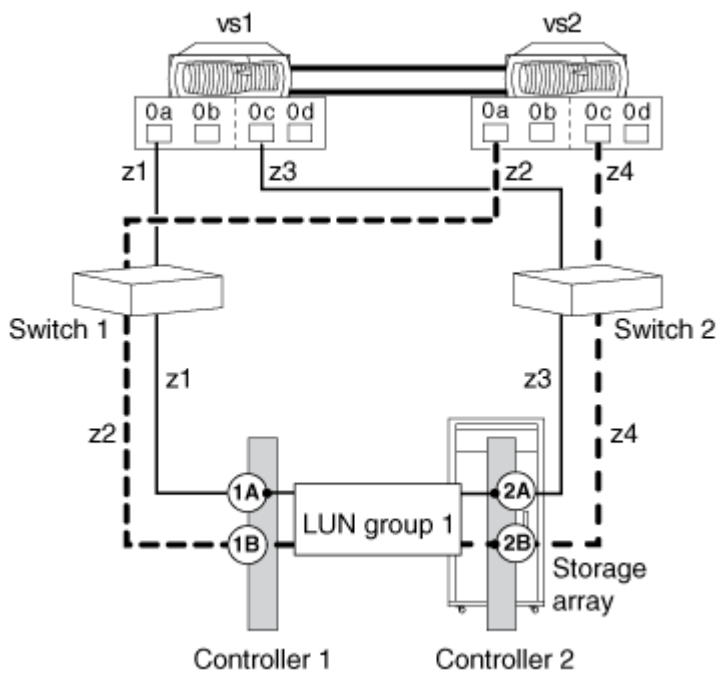

The following table shows zoning for this example configuration of ONTAP systems in an HA pair. Single-initiator zoning is the recommended zoning strategy.

Zone	ONTAP system		Storage array	
Switch 1				
z1	vs1	Port 0a	Controller 1	Port 1A
z2	vs2	Port 0a	Controller 1	Port 1B
Switch 2				
z3	vs1	Port 0c	Controller 2	Port 2A
z4	vs2	Port 0c	Controller 2	Port 2B

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.