



Network ports

ONTAP 9

NetApp
March 19, 2024

This PDF was generated from https://docs.netapp.com/us-en/ontap/networking/configure_network_ports_@cluster_administrators_only@_overview.html on March 19, 2024. Always check docs.netapp.com for the latest.

Table of Contents

- Network ports 1
 - Configure network ports overview 1
 - Configure network ports 1
 - Monitor network ports 4

Network ports

Configure network ports overview

Ports are either physical ports (NICs) or virtualized ports, such as interface groups or VLANs.

Virtual local area networks (VLANs) and interface groups constitute the virtual ports. Interface groups treat several physical ports as a single port, while VLANs subdivide a physical port into multiple separate logical ports.

- Physical ports: LIFs can be configured directly on physical ports.
- Interface group: A port aggregate containing two or more physical ports that act as a single trunk port. An interface group can be single-mode, multimode, or dynamic multimode.
- VLAN: A logical port that receives and sends VLAN-tagged (IEEE 802.1Q standard) traffic. VLAN port characteristics include the VLAN ID for the port. The underlying physical port or interface group ports are considered VLAN trunk ports, and the connected switch ports must be configured to trunk the VLAN IDs.

The underlying physical port or interface group ports for a VLAN port can continue to host LIFs, which transmit and receive untagged traffic.

- Virtual IP (VIP) port: A logical port that is used as the home port for a VIP LIF. VIP ports are created automatically by the system and support only a limited number of operations. VIP ports are supported beginning with ONTAP 9.5.

The port naming convention is *enumberletter*:

- The first character describes the port type.
"e" represents Ethernet.
- The second character indicates the numbered slot in which the port adapter is located.
- The third character indicates the port's position on a multiport adapter.
"a" indicates the first port, "b" indicates the second port, and so on.

For example, e0b indicates that an Ethernet port is the second port on the node's motherboard.

VLANs must be named by using the syntax `port_name-vlan-id`.

`port_name` specifies the physical port or interface group.

`vlan-id` specifies the VLAN identification on the network. For example, e1c-80 is a valid VLAN name.

Configure network ports

Modify network port attributes

You can modify the autonegotiation, duplex, flow control, speed, and health settings of a physical network port.

Before you begin

The port that you want to modify must not be hosting any LIFs.

About this task

- It is not recommended to modify the administrative settings of the 100 GbE, 40 GbE, 10 GbE or 1 GbE network interfaces.

The values that you set for duplex mode and port speed are referred to as administrative settings. Depending on network limitations, the administrative settings can differ from the operational settings (that is, the duplex mode and speed that the port actually uses).

- It is not recommended to modify the administrative settings of the underlying physical ports in an interface group.

The `-up-admin` parameter (available at the advanced privilege level) modifies the administrative settings of the port.

- It is not recommended to set the `-up-admin` administrative setting to false for all ports on a node, or for the port that hosts the last operational cluster LIF on a node.
- It is not recommended to modify the MTU size of the management port, `e0M`.
- The MTU size of a port in a broadcast domain cannot be changed from the MTU value that is set for the broadcast domain.
- The MTU size of a VLAN cannot exceed the value of the MTU size of its base port.

Steps

1. Modify the attributes of a network port:

```
network port modify
```

2. You can set the `-ignore-health-status` field to true for specifying that the system can ignore the network port health status of a specified port.

The network port health status is automatically changed from degraded to healthy, and this port can now be used for hosting LIFs. You should set the flow control of cluster ports to `none`. By default, the flow control is set to `full`.

The following command disables the flow control on port `e0b` by setting the flow control to `none`:

```
network port modify -node cluster-1-01 -port e0b -flowcontrol-admin none
```

Convert 40GbE NIC ports into multiple 10GbE ports for 10GbE connectivity

You can convert the X1144A-R6 and the X91440A-R6 40GbE Network Interface Cards (NICs) to support four 10GbE ports.

If you are connecting a hardware platform that supports one of these NICs to a cluster that supports 10GbE cluster interconnect and customer data connections, the NIC must be converted to provide the necessary 10GbE connections.

Before you begin

You must be using a supported breakout cable.

About this task

For a complete list of platforms that support NICs, see the [Hardware Universe](#).



On the X1144A-R6 NIC, only port A can be converted to support the four 10GbE connections. Once port A is converted, port e is not available for use.

Steps

1. Enter maintenance mode.
2. Convert the NIC from 40GbE support to 10GbE support.

```
nicadmin convert -m [40G | 10G] [port-name]
```

3. After using the convert command, halt the node.
4. Install or change the cable.
5. Depending on the hardware model, use the SP (Service Processor) or BMC (Baseboard Management Controller) to power-cycle the node for the conversion to take effect.

Removing a NIC from the node (ONTAP 9.8 and later)

This topic applies to ONTAP 9.8 and later. You might have to remove a faulty NIC from its slot or move the NIC to another slot for maintenance purposes.

Steps

1. Power down the node.
2. Physically remove the NIC from its slot.
3. Power on the node.
4. Verify that the port has been deleted:

```
network port show
```



ONTAP automatically removes the port from any interface groups. If the port was the only member of an interface group, the interface group is deleted.

5. If the port had any VLANs configured on it, they are displaced. You can view displaced VLANs using the following command:

```
cluster controller-replacement network displaced-vlans show
```



The `displaced-interface show`, `displaced-vlans show`, and `displaced-vlans restore` commands are unique and do not require the fully qualified command name, which starts with `cluster controller-replacement network`.

6. These VLANs are deleted, but can be restored using the following command:

```
displaced-vlans restore
```

7. If the port had any LIFs configured on it, ONTAP automatically chooses new home ports for those LIFs on another port in the same broadcast domain. If no suitable home port is found on the same filer, those LIFs are considered displaced. You can view displaced LIFs using the following command:

```
displaced-interface show
```

8. When a new port is added to the broadcast domain on the same node, the home ports for the LIFs are automatically restored. Alternatively, you can either set the home port using `network interface modify -home-port -home-node` or use the `displaced- interface restore` command.

Removing a NIC from the node (ONTAP 9.7 or earlier)

This topic applies to ONTAP 9.7 or earlier. You might have to remove a faulty NIC from its slot or move the NIC to another slot for maintenance purposes.

Before you begin

- All LIFs hosted on the NIC ports must have been migrated or deleted.
- None of the NIC ports can be the home ports of any LIFs.
- You must have advanced privileges to delete the ports from a NIC.

Steps

1. Delete the ports from the NIC:

```
network port delete
```

2. Verify that the ports have been deleted:

```
network port show
```

3. Repeat step 1, if the output of the `network port show` command still shows the deleted port.

Monitor network ports

Monitor the health of network ports

ONTAP management of network ports includes automatic health monitoring and a set of health monitors to help you identify network ports that might not be suitable for hosting LIFs.

About this task

If a health monitor determines that a network port is unhealthy, it warns administrators through an EMS message or marks the port as degraded. ONTAP avoids hosting LIFs on degraded network ports if there are healthy alternative failover targets for that LIF. A port can become degraded because of a soft failure event, such as link flapping (links bouncing quickly between up and down) or network partitioning:

- Network ports in the cluster IPspace are marked as degraded when they experience link flapping or loss of layer 2 (L2) reachability to other network ports in the broadcast domain.

- Network ports in non-cluster IPspaces are marked as degraded when they experience link flapping.

You must be aware of the following behaviors of a degraded port:

- A degraded port cannot be included in a VLAN or an interface group.

If a member port of an interface group is marked as degraded, but the interface group is still marked as healthy, LIFs can be hosted on that interface group.

- LIFs are automatically migrated from degraded ports to healthy ports.
- During a failover event, a degraded port is not considered as the failover target. If no healthy ports are available, degraded ports host LIFs according to the normal failover policy.
- You cannot create, migrate, or revert a LIF to a degraded port.

You can modify the `ignore-health-status` setting of the network port to `true`. You can then host a LIF on the healthy ports.

Steps

1. Log in to the advanced privilege mode:

```
set -privilege advanced
```

2. Check which health monitors are enabled for monitoring network port health:

```
network options port-health-monitor show
```

The health status of a port is determined by the value of health monitors.

The following health monitors are available and enabled by default in ONTAP:

- Link-flapping health monitor: Monitors link flapping

If a port has link flapping more than once in five minutes, this port is marked as degraded.

- L2 reachability health monitor: Monitors whether all ports configured in the same broadcast domain have L2 reachability to each other

This health monitor reports L2 reachability issues in all IPspaces; however, it marks only the ports in the cluster IPspace as degraded.

- CRC monitor: Monitors the CRC statistics on the ports

This health monitor does not mark a port as degraded but generates an EMS message when a very high CRC failure rate is observed.

3. Enable or disable any of the health monitors for an IPspace as desired by using the `network options port-health-monitor modify` command.
4. View the detailed health of a port:

```
network port show -health
```

The command output displays the health status of the port, `ignore health status` setting, and list of reasons the port is marked as degraded.

A port health status can be `healthy` or `degraded`.

If the `ignore health status` setting is `true`, it indicates that the port health status has been modified from `degraded` to `healthy` by the administrator.

If the `ignore health status` setting is `false`, the port health status is determined automatically by the system.

Monitor the reachability of network ports (ONTAP 9.8 and later)

Reachability monitoring is built into ONTAP 9.8 and later. Use this monitoring to identify when the physical network topology does not match the ONTAP configuration. In some cases, ONTAP can repair port reachability. In other cases, additional steps are required.

About this task


Use these commands to verify, diagnose, and repair network misconfigurations that stem from the ONTAP configuration not matching either the physical cabling or the network switch configuration.

Step

1. View port reachability:

```
network port reachability show
```

2. Use the following decision tree and table to determine the next step, if any.

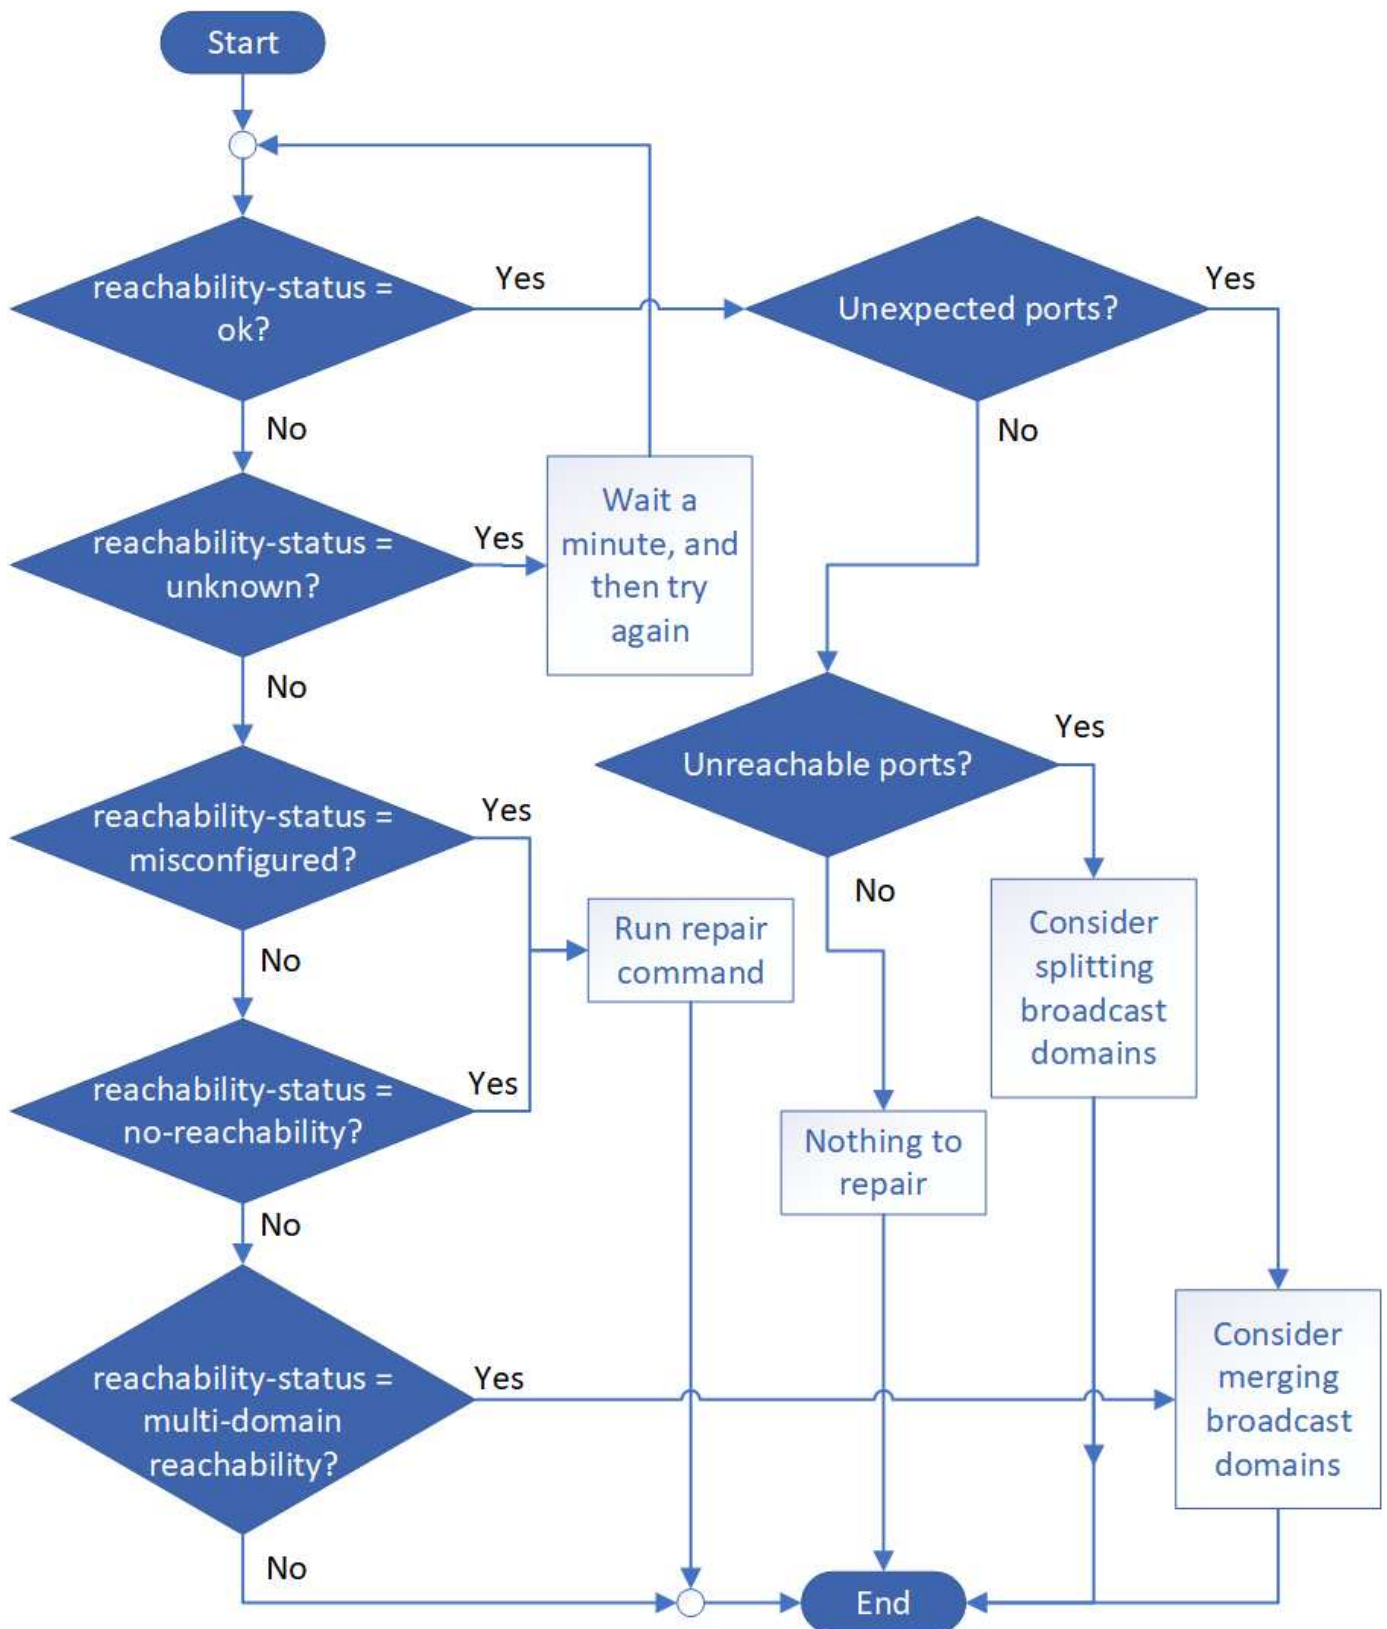

Reachability-status	Description
---------------------	-------------

ok	<p>The port has layer 2 reachability to its assigned broadcast domain.</p> <p>If the reachability-status is "ok", but there are "unexpected ports", consider merging one or more broadcast domains. For more information, see the following <i>Unexpected ports</i> row.</p> <p>If the reachability-status is "ok", but there are "unreachable ports", consider splitting one or more broadcast domains. For more information, see the following <i>Unreachable ports</i> row.</p> <p>If the reachability-status is "ok", and there are no unexpected or unreachable ports, your configuration is correct.</p>
Unexpected ports	<p>The port has layer 2 reachability to its assigned broadcast domain; however, it also has layer 2 reachability to at least one other broadcast domain.</p> <p>Examine the physical connectivity and switch configuration to determine if it is incorrect or if the port's assigned broadcast domain needs to be merged with one or more broadcast domains.</p> <p>For more information, see Merge broadcast domains.</p>
Unreachable ports	<p>If a single broadcast domain has become partitioned into two different reachability sets, you can split a broadcast domain to synchronize the ONTAP configuration with the physical network topology.</p> <p>Typically, the list of unreachable ports defines the set of ports that should be split into another broadcast domain after you have verified that the physical and switch configuration is accurate.</p> <p>For more information, see Split broadcast domains.</p>
misconfigured-reachability	<p>The port does not have layer 2 reachability to its assigned broadcast domain; however, the port does have layer 2 reachability to a different broadcast domain.</p> <p>You can repair the port reachability. When you run the following command, the system will assign the port to the broadcast domain to which it has reachability:</p> <pre>network port reachability repair -node -port</pre> <p>For more information, see Repair port reachability.</p>
no-reachability	<p>The port does not have layer 2 reachability to any existing broadcast domain.</p> <p>You can repair the port reachability. When you run the following command, the system will assign the port to a new automatically created broadcast domain in the Default IPspace:</p> <pre>network port reachability repair -node -port</pre> <p>For more information, see Repair port reachability.</p>

multi-domain-reachability	<p>The port has layer 2 reachability to its assigned broadcast domain; however, it also has layer 2 reachability to at least one other broadcast domain.</p> <p>Examine the physical connectivity and switch configuration to determine if it is incorrect or if the port's assigned broadcast domain needs to be merged with one or more broadcast domains.</p> <p>For more information, see Merge broadcast domains or Repair port reachability.</p>
unknown	<p>If the reachability-status is "unknown", then wait a few minutes and try the command again.</p>

After you repair a port, you need to check for and resolve displaced LIFs and VLANs. If the port was part of an interface group, you also need to understand what happened to that interface group. For more information, see [Repair port reachability](#).

ONTAP ports overview

A number of well-known ports are reserved for ONTAP communications with specific services. Port conflicts will occur if a port value in your storage network environment is the same as on ONTAP port.

The following table lists the TCP ports and UDP ports that are used by ONTAP.

Service	Port/Protocol	Description
ssh	22/TCP	Secure shell login
telnet	23/TCP	Remote login
DNS	53/TCP	Load Balanced DNS
http	80/TCP	Hyper Text Transfer Protocol
rpcbind	111/TCP	Remote procedure call
rpcbind	111/UDP	Remote procedure call
ntp	123/UDP	Network Time Protocol
msrpc	135/UDP	MSRPC
netbios-ssn	139/TCP	NetBIOS service session
snmp	161/UDP	Simple network management protocol
https	443/TCP	HTTP over TLS
microsoft-ds	445/TCP	Microsoft-ds
mount	635/TCP	NFS mount
mount	635/UDP	NFS Mount
named	953/UDP	Name daemon
nfs	2049/UDP	NFS Server daemon

nfs	2049/TCP	NFS Server daemon
nrv	2050/TCP	NetApp Remote Volume protocol
iscsi	3260/TCP	iSCSI target port
lockd	4045/TCP	NFS lock daemon
lockd	4045/UDP	NFS lock daemon
NSM	4046/TCP	Network Status Monitor
NSM	4046/UDP	Network Status Monitor
rquotad	4049/UDP	NFS rquotad protocol
krb524	4444/UDP	Kerberos 524
mdns	5353/UDP	Multicast DNS
HTTPS	5986/UDP	HTTPS Port - Listening binary protocol
https	8443/TCP	7MTT GUI Tool through https
ndmp	10000/TCP	Network Data Management Protocol
Cluster peering	11104/TCP	Cluster peering, bi-directional
Cluster peering, bi-directional	11105/TCP	Cluster peering
NDMP	18600 - 18699/TCP	NDMP
NDMP	30000/TCP	accept control connections over secure sockets
cifs witness port	40001/TCP	cifs witness port
tls	50000/TCP	Transport layer security
iscsi	65200/TCP	ISCSI port

ONTAP internal ports

The following table lists the TCP ports and UDP ports that are used internally by ONTAP. These ports are used to establish intracluster LIF communication:

Port/Protocol	Description
514	Syslog
900	NetApp Cluster RPC
902	NetApp Cluster RPC
904	NetApp Cluster RPC
905	NetApp Cluster RPC
910	NetApp Cluster RPC
911	NetApp Cluster RPC
913	NetApp Cluster RPC

914	NetApp Cluster RPC
915	NetApp Cluster RPC
918	NetApp Cluster RPC
920	NetApp Cluster RPC
921	NetApp Cluster RPC
924	NetApp Cluster RPC
925	NetApp Cluster RPC
927	NetApp Cluster RPC
928	NetApp Cluster RPC
929	NetApp Cluster RPC
931	NetApp Cluster RPC
932	NetApp Cluster RPC
933	NetApp Cluster RPC
934	NetApp Cluster RPC
935	NetApp Cluster RPC
936	NetApp Cluster RPC
937	NetApp Cluster RPC
939	NetApp Cluster RPC
940	NetApp Cluster RPC
951	NetApp Cluster RPC
954	NetApp Cluster RPC
955	NetApp Cluster RPC
956	NetApp Cluster RPC
958	NetApp Cluster RPC
961	NetApp Cluster RPC
963	NetApp Cluster RPC
964	NetApp Cluster RPC
966	NetApp Cluster RPC
967	NetApp Cluster RPC
982	NetApp Cluster RPC
983	NetApp Cluster RPC
5125	Alternate Control Port for disk
5133	Alternate Control Port for disk
5144	Alternate Control Port for disk

65502	Node scope SSH
65503	LIF Sharing
7810	NetApp Cluster RPC
7811	NetApp Cluster RPC
7812	NetApp Cluster RPC
7813	NetApp Cluster RPC
7814	NetApp Cluster RPC
7815	NetApp Cluster RPC
7816	NetApp Cluster RPC
7817	NetApp Cluster RPC
7818	NetApp Cluster RPC
7819	NetApp Cluster RPC
7820	NetApp Cluster RPC
7821	NetApp Cluster RPC
7822	NetApp Cluster RPC
7823	NetApp Cluster RPC
7824	NetApp Cluster RPC
8023	Node Scope TELNET
8514	Node Scope RSH
9877	KMIP Client Port (Internal Local Host Only)

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.