



Example storage node utilization dashboard with variables

OnCommand Insight

NetApp
April 01, 2024

This PDF was generated from <https://docs.netapp.com/us-en/oncommand-insight/howto/node-dashboard-example-widget-settings.html> on April 01, 2024. Always check docs.netapp.com for the latest.

Table of Contents

- Example storage node utilization dashboard with variables 1
 - Before you begin 1
 - About this task 1
 - Steps 2
 - Node dashboard example widget settings 6

Example storage node utilization dashboard with variables

Create a custom dashboard for Storage Analysis which has variables for storage, storage pool, node, tier, utilization and latency.


Before you begin

Familiarity with dashboards in Insight is recommended but not required.

About this task

The following procedure will create a custom Storage Analysis Overview dashboard which uses variables for storage, storage pool, node, tier, utilization and latency. Variables in the example below will be used to filter the displayed assets or metrics across one or many widgets available on the dashboard. The widgets that use these variables as filters will be updated with filtered content on-demand according to the values entered in the variable fields on the dashboard, allowing you to quickly filter multiple charts and graphs to drill down to a specific area of interest.

By following the steps in this example, you will create a dashboard like the following. You can change these widgets, or add any number of additional widgets, to highlight any data you choose.

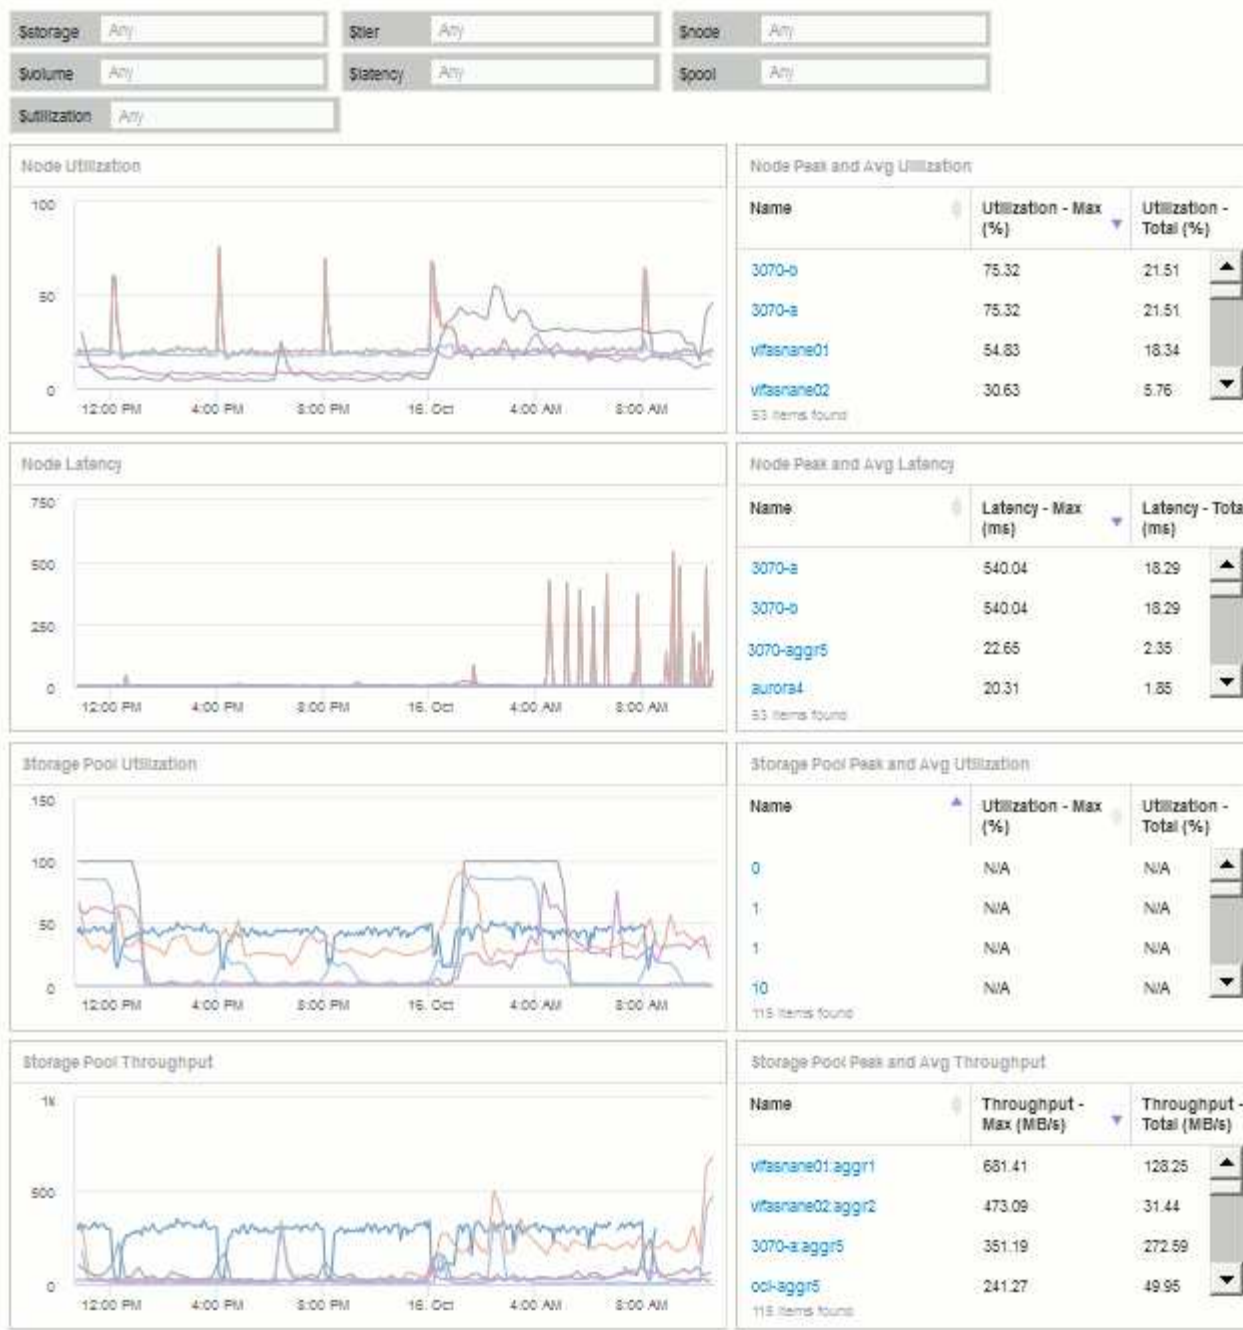

Steps

1. Create a new dashboard, and name it "Analysis: Storage Overview", or something equally descriptive.
2. Click on the **Variable** drop-down and select **Text** variable type. By default, the variable is named `$var1`. Click on `$var1` to edit the name, and change it to `$storage`, then click the check mark to save the variable. Repeat to create text variables for `$node`, `$pool`, and `$volume`.
3. Repeat the above process to create **Number**-type variables named `$utilization` and `$latency`.
4. Click on the **Variable** drop-down and search for the `Tier` annotation. Select it to create a variable named `$tier`.


You can add variables at any time, however it is easier to create them up front and therefore make them available to all widgets as you create them.

5. Add a widget by clicking on the **Widget** drop-down and selecting either a **line chart** or **area chart** widget. Name the widget “Node Utilization”. Click on the **Storage** asset type and change it to **Storage Node**. Select **Utilization - Total** for the chart data.
6. Click on the **Filter by +** button to add a filter. Search for and select **Storage**, then click on **Any** and select the *\$storage* variable.
7. Click the **+** button to add another filter for **Name**. Set the variable to *\$node*.

Different variables can be assigned to the annotation name filter. Use the name/variable pair at the lowest level depending on the object in the widget. For example:

- You can assign the *\$node* variable to the **Name** filter for a Node-focused widget.
 - You can assign the *\$pool* variable to the **Name** filter for a Pool-focused widget.
8. Click the **+** button to add another filter for **Utilization - Total (%)**. Set the variable to *>= \$utilization*.
 9. Click the **X** after the **Roll up** field to collapse the field.
 10. Select **Show Top 5** and click **Save** to save the widget and return to your Dashboard.

Your widget should look something like this:

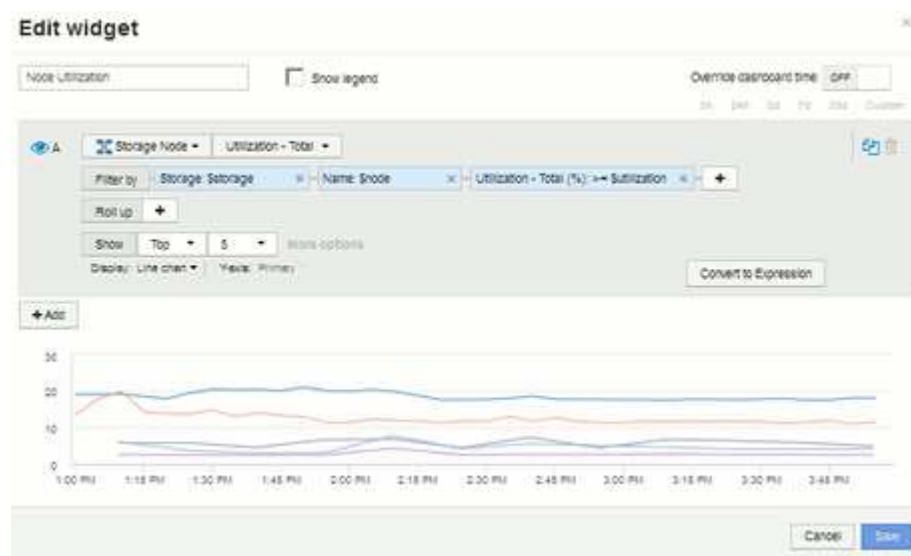

11. Add another line or area chart widget to your dashboard. Select **Storage Node** as the asset type and **Latency - Total** as the metric to chart.
12. Click on the **Filter by +** button to add filters for **Storage: \$storage** and **Name: \$node**.
13. Add a filter for **Latency - Total** and select the *\$latency* variable.
14. Name the widget “Node Latency” and save it.
15. You can add supporting tables to show more details for the charts you created, for example, Max or Avg node utilization. Add a **Table widget** to the dashboard and select **Storage Node** as the asset type, and create filters for **Storage: \$storage**, **Name: \$node**, and **Utilization - Total: \$utilization**.
16. Add columns to the table for **Utilization - Max**, **Utilization - Total**, or any other desired columns.
17. Name the widget “Node Peak and Avg Utilization” and save it.

Edit widget

Node Peak and Avg Utilization

Override dashboard time:

OFF

3h
24h
3d
7d
30d
Custom

Storage Node

Filter by

Storage: \$storage

Name: \$node

Utilization - Total (%): >= \$utilization

+

Group by

+

Name	Utilization - Max (%)	Utilization - Total (%)
3070-a	76.79	21.57
3070-b	76.79	21.57
vifasnane01	54.83	18.55
vifasnane02	32.50	6.06
aurora3	29.27	12.88

53 items found

Cancel

Save

Node Peak and Avg Utilization

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Storage Node

Filter by: Storage: \$storage × Name: \$node × Utilization - Total (%) >= \$utilization × +

Group by: +

Name	Utilization - Max (%)	Utilization - Total (%)
3070-a	76.79	21.57
3070-b	76.79	21.57
vifasname01	54.83	18.55
vifasname02	32.50	6.06
aurora3	29.27	12.88

53 items found

Cancel Save

- Repeat the steps to create a table for Node Latency, showing **Latency - Max**, **Latency - Total**, or other columns as desired.
- To round out your dashboard, you might add additional chart and table widgets for some or all of the following:

19. To round out your dashboard, you might add additional chart and table widgets for some or all of the following:

Chart	Table
Storage Pool Utilization	Storage Pool Peak and Avg Utilization
Storage Pool Throughput	Storage Pool Peak and Avg Throughput
Volume Latency	Volume Peak and Avg Latency
Volume IOPS	Volume Peak and Avg IOPS

Table

Storage Pool Utilization

Storage Pool Peak and Avg Utilization

Storage Pool Throughput

Storage Pool Peak and Avg Throughput

Volume Latency

Volume Peak and Avg Latency

Volume IOPS

Volume Peak and Avg IOPS


1. You can move and resize the widgets in whatever placement you want on your dashboard. When finished, be sure to **Save** the dashboard.

Your final dashboard will look something like this:



- You can use the variables to focus on specific assets in your dashboard. As you enter values into the variable fields, your widgets update automatically to reflect those variables. For example, by entering "15" in the \$utilization variable field, the widgets using that variable update to show only assets with total utilization $\geq 15\%$.

Node utilization widget showing top 5 of all nodes:

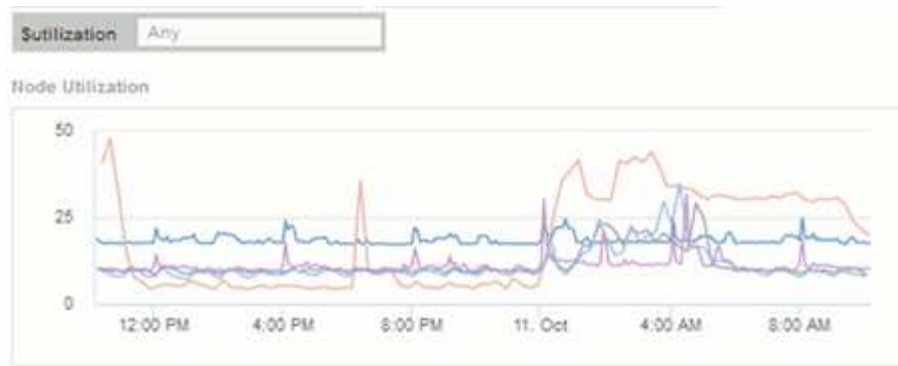

Node utilization widget showing nodes with 15% or greater utilization:



3. Keep in mind the following when creating your widgets:

- The `$tier` variable will only impact resources that are annotated with the **Tier** annotation.
- Not all filters will impact all widgets, depending on whether the widget is designed to accept the variable(s) specified.
- Number variables are applied as “greater than or equal to” the value specified. Note that any variable can be used as a filter on any widget at any level in a storage hierarchy, as long as the variable is valid for the asset against which the widget is running. As you move down from a Node level to Storage Pool to a Volume widget, more variables are present for assignment as filters. For example, at a Storage Node level widget, the *Storage* and *Name* variables can be assigned as filters. At a Storage Pool level, *Storage*, *Nodes*, *Storage Pools* and *Name* are all available. Assign your variables as appropriate and use the `$name` variable at the lowest level in the stack. Doing this will allow your `$name` variable to filter on the actual name of the asset against which the widget is running.


Node dashboard example widget settings

Widget settings for the node dashboard with variables example.

Following are the settings for each of the widgets in the storage node dashboard example.

Node utilization:

Edit widget

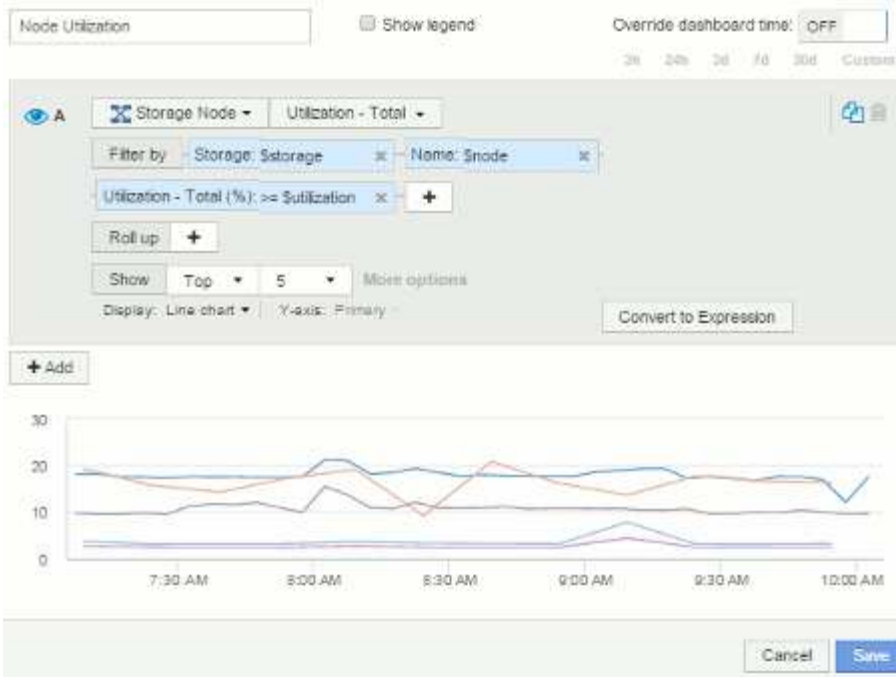

Edit widget

Node Peak and Avg Utilization

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Storage Node

Filter by Storage: \$storage Name: \$node Utilization - Total (%): >= \$utilization

Group by


Name	Utilization - Max (%)	Utilization - Total (%)
3070-a	76.79	21.57
3070-b	76.79	21.57
vifasane01	54.83	18.55
vifasane02	32.50	6.06
aurora3	29.27	12.88

53 items found

Cancel Save

Node latency:

Edit widget

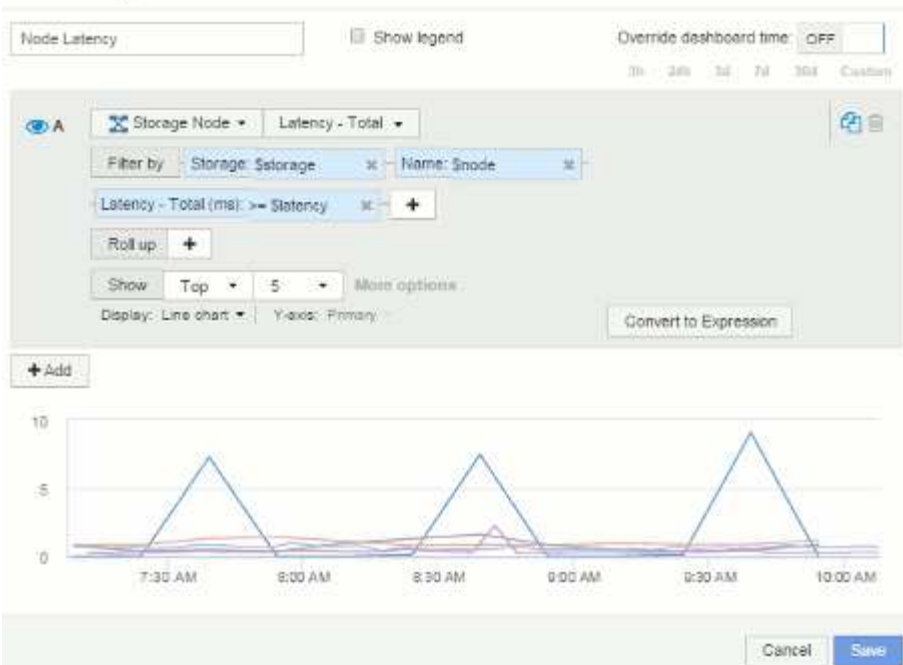

Edit widget

Node Peak and Avg Latency

Override dashboard time: OFF

3h 30m 3d 7d 30d Custom

Storage Node

Filter by: Storage: \$storage Name: \$node Latency - Total (ms) >= \$latency

Group by: +


Name	Latency - Max (ms)	Latency - Total (ms)
vfasname04	9.05	7.70
vfasname05	2.25	0.41
vfasname02	1.62	0.90
vfasname01	1.42	1.03
vfasname06	0.97	0.64

8 items found

Cancel Save

Storage pool utilization:

Edit widget

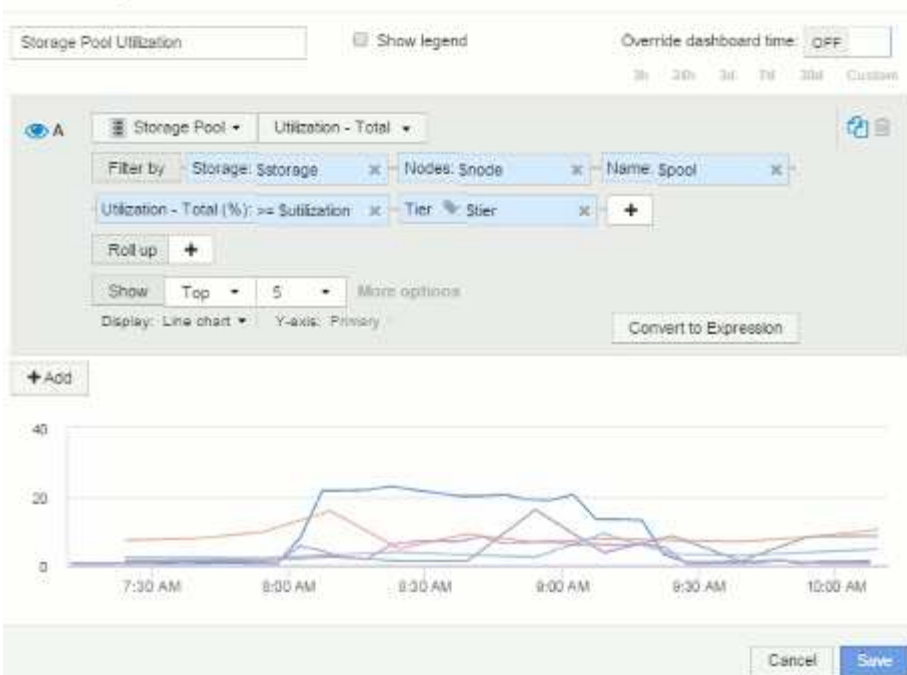

Edit widget

Storage Pool Peak and Avg Utilization

Override dashboard time:

3h 24h 3d 7d 30d Custom

Storage Pool

Filter by: Storage: \$storage x Nodes: \$node x Name: \$pool x

Utilization - Total (%) >= Utilization x Tier: \$tier x +

Group by: +

Table view


Name	Utilization - Max (%)	Utilization - Total (%)
vfasname01:aggr1	15.85	8.52
vfasname01:vfasna...	16.19	4.71
vfasname02:aggr2	9.28	3.65
vfasname02:vfasna...	4.66	1.63
vfasname03:aggr3	1.04	0.68

14 items found

Cancel Save

Storage pool throughput:

Edit widget

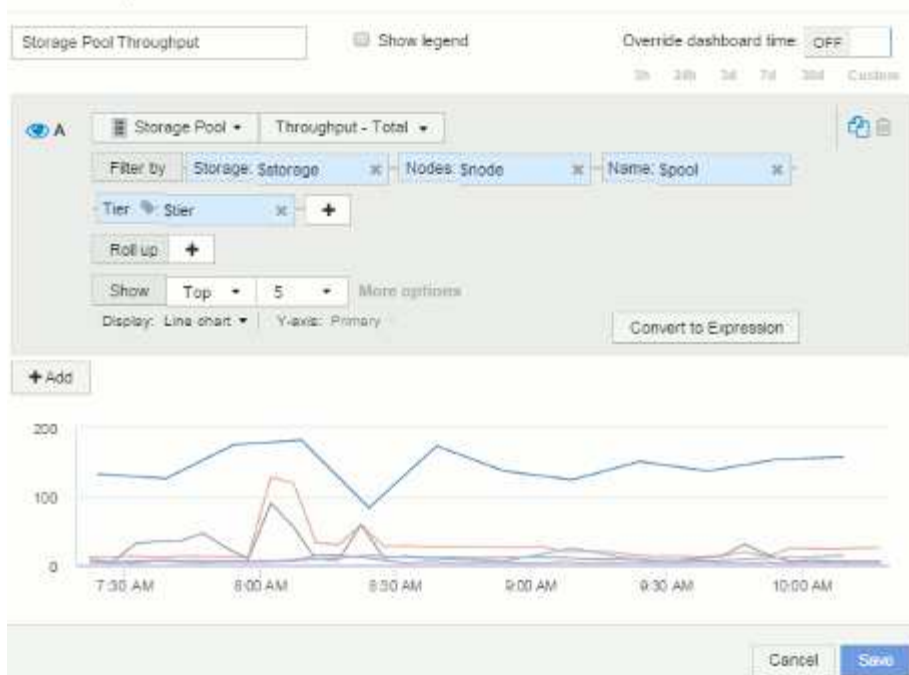

Edit widget

Storage Pool Peak and Avg Throughput

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Storage Pool

Filter by: Storage: \$storage x Nodes: \$node x Name: \$pool x

Tier: \$tier x +

Group by: +

Name	Throughput - Max (MB/s)	Throughput - Total (MB/s)
vfasname01:aggr1	181.17	143.62
vfasname06:aggr1	127.19	26.75
vfasname05:aggr1	89.83	18.20
vfasname02:aggr2	24.57	9.70
vfasname05:aggr_opm1	14.61	4.75

14 items found

Cancel Save

Volume latency:

Edit widget

Volume Latency

Show legend

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Volume

Latency - Total

Filter by

Storage: \$storage

Nodes: \$node

Storage pools: \$pool

Name: \$volume

Tier: \$tier


Roll up: +

Show: Top 5 More options

Display: Line chart Y-axis: Primary

Convert to Expression

+Add



Cancel

Save

Edit widget

Volume Peak and Avg Latency

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Volume

Filter by

Storage: \$storage

Nodes: \$node

Storage pools: \$pool

Name: \$volume

Latency - Total (ms): >= Latency

Tier: \$tier

Group by: +

Name	Latency - Max (ms)	Latency - Total (ms)
vifasname05/vol/bo...	0.00	0.00
vifasname05/vol/bo...	0.19	0.06
vifasname05/vol/bo...	0.00	0.00
vifasname05/vol/bo...	0.00	0.00
vifasname05/vol/bo...	0.00	0.00


51 items found

Cancel

Save

Volume IOPS:

Edit widget

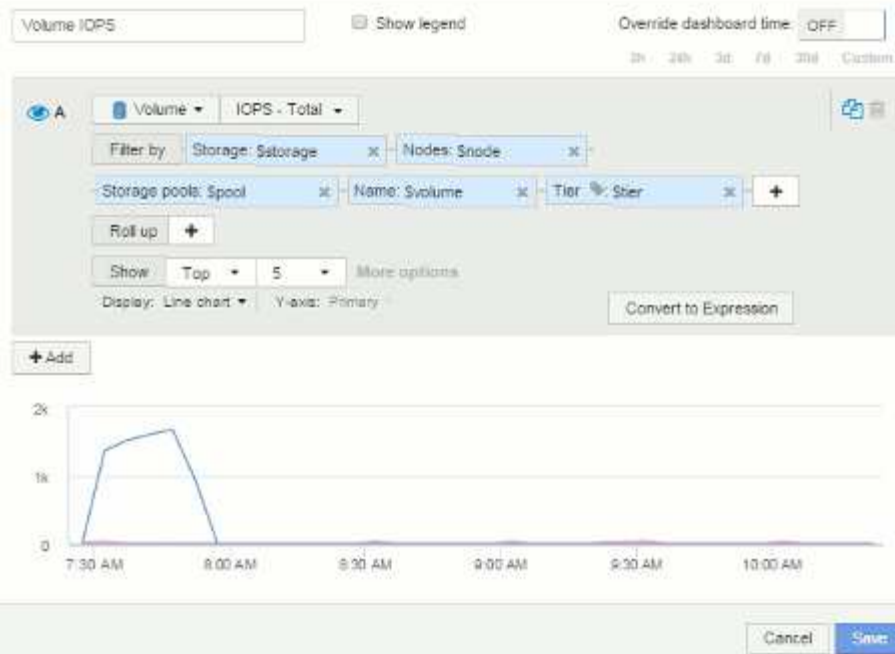

Edit widget

Volume Peak and Avg IOPS

Override dashboard time: OFF

3h 24h 3d 7d 30d Custom

Volume

Filter by: Storage: Sstorage x Nodes: Snode x Storage pools: Spool x

Name: Svolume x Tier: Stier x +

Group by +

Name	IOPS - Max (IO/s)	IOPS - Total (IO/s)
vfasname05/vol/vl...	1,689.31	198.97
vfasname05/vol/vl...	50.03	19.18
vfasname05/vol/bo...	1.51	1.11
vfasname05/vol/bo...	0.00	0.00
vfasname06/vol/bo...	0.00	0.00

51 items found

Cancel Save

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.