



TR-4973: Ripristino rapido e clonazione di Oracle VLDB con unione incrementale su AWS FSx ONTAP

NetApp database solutions

NetApp
August 18, 2025

Sommario

- TR-4973: Ripristino rapido e clonazione di Oracle VLDB con unione incrementale su AWS FSx ONTAP 1
 - Scopo 1
 - Pubblico 1
 - Ambiente di test e convalida della soluzione 2
 - Architettura 2
 - Componenti hardware e software 2
 - Fattori chiave per la considerazione dell'implementazione 3
 - Distribuzione della soluzione 4
 - Prerequisiti per la distribuzione 4
 - Fornire ed esportare il volume NFS da montare sull'host dell'istanza del database EC2 5
 - Imposta l'unione incrementale di Oracle RMAN per la copia dell'immagine su FSx 8
 - Passa Oracle DB alla copia dell'immagine per un rapido ripristino 22
 - Ripristino del database Oracle dalla copia dell'immagine su un host di istanza del database EC2 diverso 30
 - Copia dell'immagine standby di Oracle clonata per altri casi d'uso 56
 - Dove trovare ulteriori informazioni 83

TR-4973: Ripristino rapido e clonazione di Oracle VLDB con unione incrementale su AWS FSx ONTAP

Allen Cao, Niyaz Mohamed, NetApp

Questa soluzione fornisce una panoramica e dettagli per un rapido ripristino e clonazione di Oracle VLDB distribuito su un'istanza di elaborazione AWS EC2 con montaggio NFS su FSx ONTAP per la creazione di una copia di file di dati in standby da unire in modo incrementale e costante tramite RMAN.

Scopo

Il ripristino di un database molto grande (VLDB) in Oracle utilizzando lo strumento di backup Oracle Recovery Manager (RMAN) può rivelarsi un'operazione molto complessa. In caso di guasto, il processo di ripristino del database dai supporti di backup può richiedere molto tempo, ritardando il ripristino del database e potenzialmente incidendo in modo significativo sul Contratto di servizio (SLA). Tuttavia, a partire dalla versione 10g, Oracle ha introdotto una funzionalità RMAN che consente agli utenti di creare copie di immagini organizzate dei file di dati del database Oracle su un ulteriore spazio di archiviazione su disco situato sull'host del server DB. Queste copie delle immagini possono essere aggiornate in modo incrementale quotidianamente tramite RMAN. In caso di errore, l'amministratore del database (DBA) può rapidamente spostare il database Oracle dal supporto danneggiato alla copia immagine, eliminando la necessità di un ripristino completo del supporto del database. Il risultato è un SLA notevolmente migliorato, anche se al costo di raddoppiare lo spazio di archiviazione del database richiesto.

Se sei interessato a un SLA per il tuo VLDB e stai pensando di spostare il database Oracle su un cloud pubblico come AWS, puoi impostare una struttura di protezione del database simile utilizzando risorse come AWS FSx ONTAP per la gestione temporanea della copia dell'immagine del database in standby. In questa documentazione, illustriamo come effettuare il provisioning ed esportare un file system NFS da AWS FSx ONTAP da montare su un server di database Oracle per predisporre una copia del database in standby per un rapido ripristino in caso di guasto dell'archiviazione primaria.

Meglio ancora, mostriamo anche come sfruttare NetApp FlexClone per creare una copia dello stesso file system NFS di staging per altri casi d'uso, ad esempio per creare un ambiente Oracle di sviluppo/test con la stessa copia dell'immagine del database di standby, senza ulteriori investimenti in termini di storage.

Questa soluzione affronta i seguenti casi d'uso:

- Un'unione incrementale di copie di immagini Oracle VLDB tramite RMAN su un punto di montaggio NFS fuori dall'archiviazione AWS FSx ONTAP .
- Ripristino rapido di un Oracle VLDB passando alla copia dell'immagine del database sullo storage FSx ONTAP in caso di errore.
- Clona il volume del file system NFS FSx ONTAP che memorizza una copia dell'immagine Oracle VLDB da utilizzare per creare un'altra istanza del database per altri casi d'uso.

Pubblico


Questa soluzione è destinata alle seguenti persone:

- Un DBA che ha configurato l'unione incrementale delle copie delle immagini Oracle VLDB tramite RMAN in AWS per un ripristino più rapido del database.
- Architetto di soluzioni di database che testa i carichi di lavoro Oracle nel cloud pubblico AWS.
- Un amministratore di storage che gestisce i database Oracle distribuiti nello storage AWS FSx ONTAP .
- Un proprietario di un'applicazione che vorrebbe installare database Oracle nell'ambiente AWS FSx/EC2.

Ambiente di test e convalida della soluzione

Il test e la convalida di questa soluzione sono stati eseguiti in un ambiente AWS FSx ONTAP ed EC2 che potrebbe non corrispondere all'ambiente di distribuzione finale. Per ulteriori informazioni, consultare la sezione [Fattori chiave per la considerazione dell'implementazione](#) .

Architettura

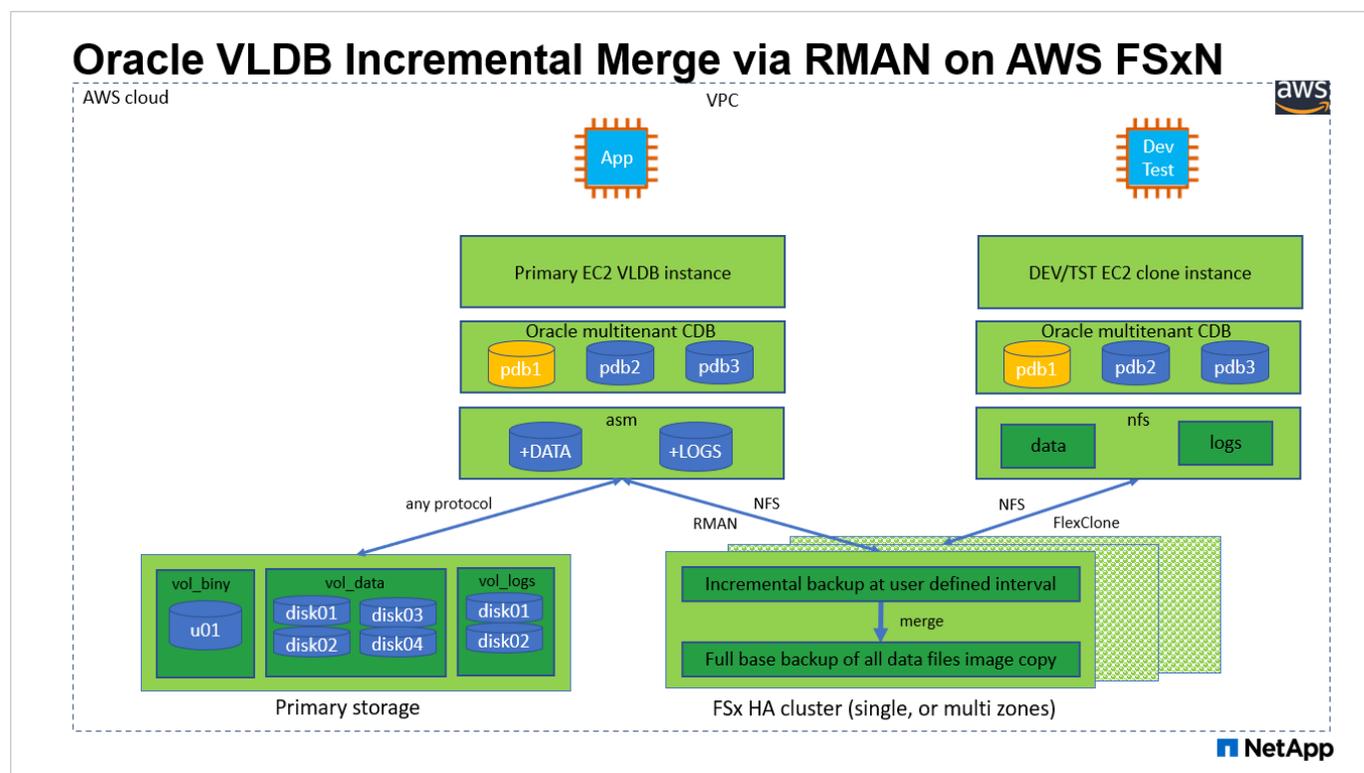

Componenti hardware e software

Hardware		
Archiviazione FSx ONTAP	Versione attuale offerta da AWS	Un cluster FSx HA nella stessa VPC e zona di disponibilità
Istanza EC2 per il calcolo	t2.xlarge/4vCPU/16G	Due istanze EC2 T2 xlarge EC2, una come server DB primario e l'altra come server DB clone
Software		
RedHat Linux	RHEL-8.6.0_HVM-20220503-x86_64-2-Hourly2-GP2	Abbonamento RedHat distribuito per i test

Infrastruttura Oracle Grid	Versione 19.18	Patch RU applicata p34762026_190000_Linux-x86-64.zip
Database Oracle	Versione 19.18	Patch RU applicata p34765931_190000_Linux-x86-64.zip
Oracle OPatch	Versione 12.2.0.1.36	Ultima patch p6880880_190000_Linux-x86-64.zip

Fattori chiave per la considerazione dell'implementazione

- **Layout di archiviazione Oracle VLDB per unione incrementale RMAN.** Nei nostri test e nelle nostre convalide, il volume NFS per il backup incrementale e l'unione di Oracle viene allocato da un singolo file system FSx, con una velocità di elaborazione di 4 GBps, 160.000 IOPS SSD raw e un limite di capacità di 192 TiB. Per la distribuzione oltre le soglie, è possibile concatenare più file system FSx in parallelo con più punti di montaggio NFS per fornire una capacità maggiore.
- **Recuperabilità di Oracle tramite unione incrementale RMAN.** Il backup incrementale e l'unione RMAN vengono generalmente eseguiti con una frequenza definita dall'utente in base agli obiettivi RTO e RPO. In caso di perdita totale dell'archiviazione dei dati primari e/o dei registri archiviati, può verificarsi una perdita di dati. Il database Oracle può essere ripristinato fino all'ultimo backup incrementale disponibile dalla copia dell'immagine di backup del database FSx. Per ridurre al minimo la perdita di dati, l'area di ripristino flash di Oracle può essere configurata sul punto di montaggio NFS di FSx e i log archiviati vengono sottoposti a backup sul punto di montaggio NFS di FSx insieme alla copia dell'immagine del database.
- **Esecuzione di Oracle VLDB dal file system NFS di FSx.** A differenza di altri sistemi di archiviazione di massa per il backup di database, AWS FSx ONTAP è uno storage di livello produttivo abilitato al cloud che offre elevati livelli di prestazioni ed efficienza di archiviazione. Una volta che Oracle VLDB passa dall'archiviazione primaria alla copia dell'immagine sul file system NFS FSx ONTAP, le prestazioni del database possono essere mantenute a un livello elevato mentre viene risolto il problema dell'archiviazione primaria. Puoi stare tranquillo sapendo che l'esperienza utente delle applicazioni non viene compromessa da un guasto dell'archiviazione primaria.
- * Copia dell'immagine FlexClone Oracle VLDB del volume NFS per altri casi d'uso.* AWS FSx ONTAP FlexClone fornisce copie condivise dello stesso volume di dati NFS che sono scrivibili. Pertanto, possono essere utilizzati per molti altri casi d'uso, mantenendo comunque l'integrità della copia dell'immagine Oracle VLDB di staging anche quando il database Oracle viene commutato. Ciò consente un enorme risparmio sui costi di archiviazione riducendo sostanzialmente l'ingombro dello storage VLDB. NetApp consiglia di ridurre al minimo le attività FlexClone in caso di passaggio del database dallo storage primario alla copia dell'immagine del database, per mantenere elevate le prestazioni di Oracle.
- **Istanze di calcolo EC2.** In questi test e convalide, abbiamo utilizzato un'istanza AWS EC2 t2.xlarge come istanza di calcolo del database Oracle. NetApp consiglia di utilizzare un'istanza EC2 di tipo M5 come istanza di elaborazione per Oracle nella distribuzione di produzione perché è ottimizzata per il carico di lavoro del database. È necessario dimensionare l'istanza EC2 in modo appropriato per il numero di vCPU e la quantità di RAM in base ai requisiti effettivi del carico di lavoro.
- **Distribuzione di cluster HA di storage FSx a zona singola o multizona.** In questi test e convalide, abbiamo distribuito un cluster FSx HA in una singola zona di disponibilità AWS. Per la distribuzione in produzione, NetApp consiglia di distribuire una coppia FSx HA in due diverse zone di disponibilità. Un cluster FSx HA viene sempre fornito in una coppia HA sincronizzata in una coppia di file system attivi-passivi per fornire ridondanza a livello di storage. L'implementazione multizona migliora ulteriormente l'elevata disponibilità in caso di guasto in una singola zona AWS.

- **Dimensionamento del cluster di archiviazione FSx.** Un file system di storage Amazon FSx ONTAP fornisce fino a 160.000 IOPS SSD raw, fino a 4 GBps di throughput e una capacità massima di 192 TiB. Tuttavia, è possibile dimensionare il cluster in termini di IOPS forniti, throughput e limite di archiviazione (minimo 1.024 GiB) in base alle esigenze effettive al momento della distribuzione. La capacità può essere regolata dinamicamente al volo senza compromettere la disponibilità dell'applicazione.
- **Configurazione dNFS.** dNFS è integrato nel kernel Oracle ed è noto per aumentare notevolmente le prestazioni del database Oracle quando Oracle viene distribuito su storage NFS. dNFS è incluso nel pacchetto binario Oracle ma non è attivato per impostazione predefinita. Dovrebbe essere attivato per qualsiasi distribuzione di database Oracle su NFS. Per la distribuzione di più file system FSx per un VLDB, è necessario configurare correttamente il multi-path dNFS verso diversi file system NFS FSx.

Distribuzione della soluzione

Si presume che il tuo Oracle VLDB sia già distribuito nell'ambiente AWS EC2 all'interno di una VPC. Se hai bisogno di aiuto con la distribuzione di Oracle in AWS, consulta i seguenti report tecnici.

- ["Procedure consigliate per la distribuzione di Oracle Database su EC2 e FSx"](#)
- ["Distribuzione e protezione del database Oracle in AWS FSx/EC2 con iSCSI/ASM"](#)
- ["Oracle 19c in riavvio autonomo su AWS FSx/EC2 con NFS/ASM"](#)

Il tuo Oracle VLDB può essere eseguito su un FSx ONTAP o su qualsiasi altro storage tra quelli disponibili nell'ecosistema AWS EC2. La sezione seguente fornisce procedure di distribuzione dettagliate per la configurazione dell'unione incrementale RMAN in una copia immagine di un Oracle VLDB in fase di staging in un montaggio NFS da uno storage AWS FSx ONTAP .

Prerequisiti per la distribuzione

Per la distribuzione sono richiesti i seguenti prerequisiti.

1. È stato configurato un account AWS e sono stati creati i segmenti di rete e VPC necessari all'interno del tuo account AWS.
2. Dalla console AWS EC2, è necessario distribuire due istanze EC2 Linux, una come server Oracle DB primario e un server DB di destinazione clone alternativo facoltativo. Per maggiori dettagli sulla configurazione dell'ambiente, consultare il diagramma dell'architettura nella sezione precedente. Rivedere anche il "[Guida utente per istanze Linux](#)" per maggiori informazioni.
3. Dalla console AWS EC2, distribuisce i cluster HA di storage Amazon FSx ONTAP per ospitare i volumi NFS che archiviano la copia dell'immagine di standby del database Oracle. Se non hai familiarità con la distribuzione dell'archiviazione FSx, consulta la documentazione "[Creazione di file system FSx ONTAP](#)" per istruzioni dettagliate.
4. I passaggi 2 e 3 possono essere eseguiti utilizzando il seguente toolkit di automazione Terraform, che crea un'istanza EC2 denominata `ora_01` e un file system FSx denominato `fsx_01`. Rivedere attentamente le istruzioni e modificare le variabili in base all'ambiente prima dell'esecuzione. Il modello può essere facilmente modificato in base alle proprie esigenze di distribuzione.

```
git clone https://github.com/NetApp-  
Automation/na_aws_fsx_ec2_deploy.git
```



Assicurati di aver allocato almeno 50 G nel volume radice dell'istanza EC2 per avere spazio sufficiente per organizzare i file di installazione di Oracle.

Fornire ed esportare il volume NFS da montare sull'host dell'istanza del database EC2

In questa dimostrazione, mostreremo come effettuare il provisioning di un volume NFS dalla riga di comando effettuando l'accesso a un cluster FSx tramite ssh come utente fsxadmin tramite l'IP di gestione del cluster FSx. In alternativa, il volume può essere allocato anche tramite la console AWS FSx. Ripetere le procedure su altri file system FSx se sono configurati più file system FSx per adattarsi alle dimensioni del database.


1. Per prima cosa, predisporre il volume NFS tramite CLI accedendo al cluster FSx tramite SSH come utente fsxadmin. Modifica l'indirizzo IP di gestione del cluster FSx, che può essere recuperato dalla console dell'interfaccia utente di AWS FSx ONTAP .

```
ssh fsxadmin@172.30.15.53
```

2. Crea un volume NFS delle stesse dimensioni del tuo storage primario per archiviare la copia dell'immagine dei file di dati del database Oracle VLDB primario.

```
vol create -volume ora_01_copy -aggregate aggr1 -size 100G -state  
online -type RW -junction-path /ora_01_copy -snapshot-policy none  
-tiering-policy snapshot-only
```

3. In alternativa, il volume può essere fornito dall'interfaccia utente della console AWS FSx con le opzioni: efficienza di archiviazione Enabled , stile di sicurezza Unix , Politica di snapshot None e livelli di archiviazione Snapshot Only come mostrato di seguito.

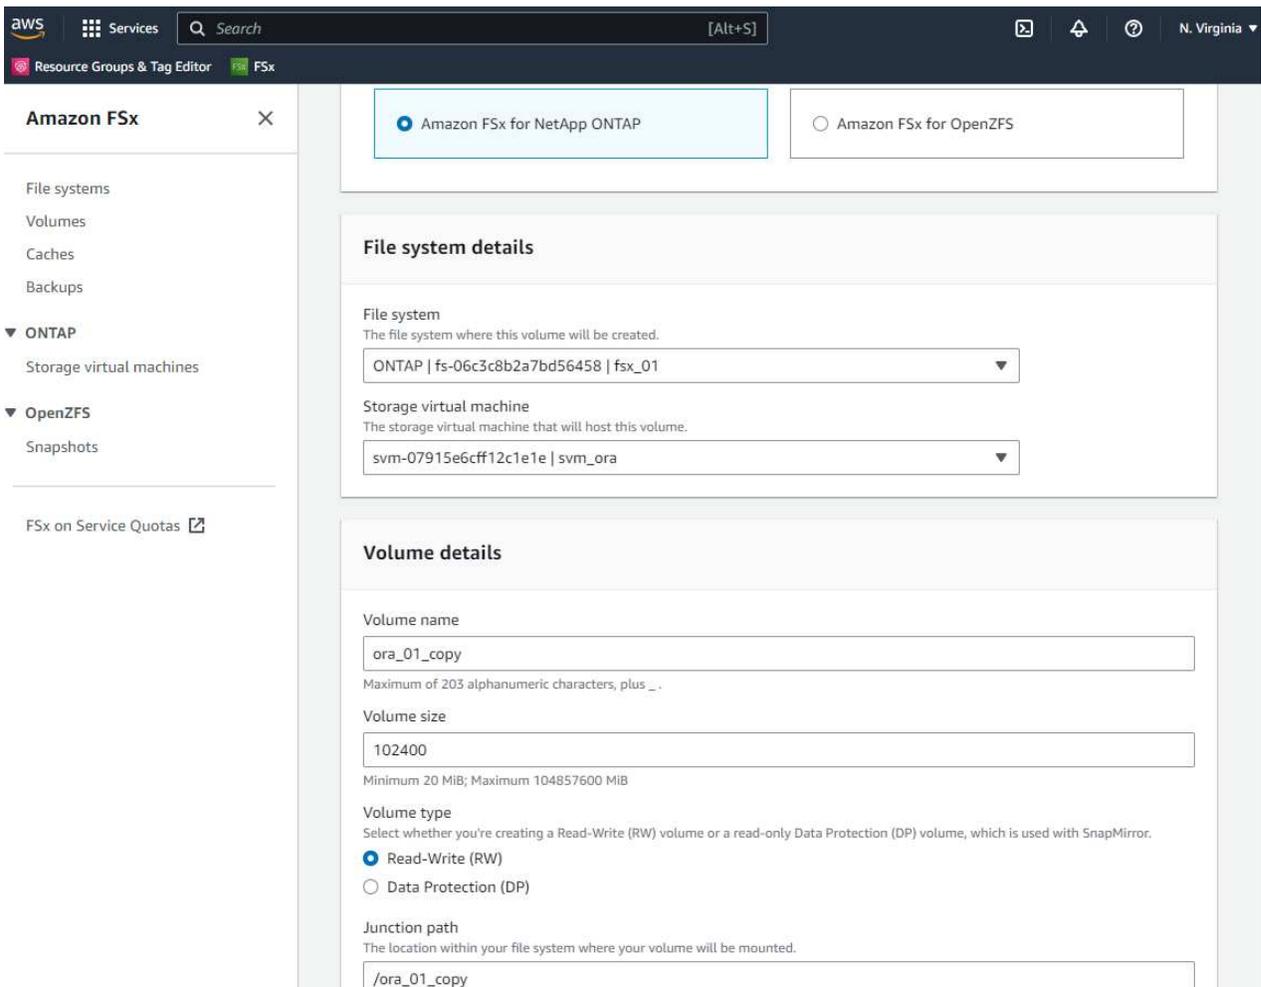

4. Crea una policy di snapshot personalizzata per il database Oracle con una pianificazione giornaliera e una conservazione di 30 giorni. Dovresti adattare la policy alle tue esigenze specifiche in termini di frequenza degli snapshot e finestra di conservazione.

```
snapshot policy create -policy oracle -enabled true -schedule1 daily
-count1 30
```

Applica la policy al volume NFS fornito per il backup incrementale e l'unione RMAN.

```
vol modify -volume ora_01_copy -snapshot-policy oracle
```

5. Accedi all'istanza EC2 come ec2-user e crea una directory /nfsfsxn. Creare directory di punti di montaggio aggiuntivi per file system FSx aggiuntivi.

```
sudo mkdir /nfsfsxn
```

6. Montare il volume NFS FSx ONTAP sull'host dell'istanza del database EC2. Modifica l'indirizzo NFS lif del tuo server virtuale FSx. L'indirizzo NFS lif può essere recuperato dalla console dell'interfaccia utente di FSx ONTAP .

```
sudo mount 172.30.15.19:/ora_01_copy /nfsfsxn -o  
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsize=262144,ws  
ize=262144,noi  
tr
```

7. Modificare la proprietà del punto di montaggio in oracle:oinstall, modificare il nome utente Oracle e il gruppo primario, se necessario.

```
sudo chown oracle:oinstall /nfsfsxn
```

Imposta l'unione incrementale di Oracle RMAN per la copia dell'immagine su FSx

L'unione incrementale RMAN aggiorna continuamente la copia dell'immagine dei file di dati del database di staging a ogni intervallo di backup/unione incrementale. La copia dell'immagine del backup del database sarà aggiornata con la stessa frequenza con cui si esegue il backup/unione incrementale. Pertanto, quando si decide la frequenza del backup incrementale e dell'unione RMAN, è necessario tenere in considerazione le prestazioni del database e gli obiettivi RTO e RPO.

1. Accedi all'istanza EC2 del server DB primario come utente Oracle
2. Creare una directory oracopy nel punto di montaggio /nfsfsxn per memorizzare le copie delle immagini dei file di dati Oracle e la directory archlog per l'area di ripristino flash di Oracle.

```
mkdir /nfsfsxn/oracopy
```

```
mkdir /nfsfsxn/archlog
```

3. Accedi al database Oracle tramite sqlplus, abilita il monitoraggio delle modifiche dei blocchi per un backup incrementale più rapido e modifica l'area di ripristino flash di Oracle sul montaggio FSx ONTAP se attualmente si trova sullo storage primario. Ciò consente il backup automatico del file di controllo/spfile predefinito di RMAN e dei log archiviati sul mount NFS di FSx ONTAP per il ripristino.

```
sqlplus / as sysdba
```

Dal prompt di sqlplus, eseguire il seguente comando.

```
alter database enable block change tracking using file  
'/nfsfsxn/oracopy/bct_db1.ctf'
```

```
alter system set db_recovery_file_dest='/nfsfsxn/archlog/'  
scope=both;
```

4. Creare uno script di backup RMAN e di unione incrementale. Lo script alloca più canali per il backup e l'unione RMAN paralleli. La prima esecuzione genererebbe la copia iniziale completa dell'immagine di base. In un'esecuzione completa, elimina innanzitutto i backup obsoleti che si trovano al di fuori della finestra di conservazione per mantenere pulita l'area di staging. Quindi cambia il file di registro corrente prima di unirli e di eseguire il backup. Il backup incrementale segue l'unione, in modo che la copia dell'immagine del database sia in ritardo rispetto allo stato corrente del database di un ciclo di backup/unione. L'ordine di unione e backup può essere invertito per un ripristino più rapido, a seconda delle preferenze dell'utente. Lo script RMAN può essere integrato in un semplice script shell da eseguire da crontab sul server DB primario. Assicurarsi che il backup automatico del file di controllo sia attivato nelle impostazioni RMAN.

```
vi /home/oracle/rman_bkup_merge.cmd
```

Add following lines:

```
RUN
```

```
{  
  allocate channel c1 device type disk format '/nfsfsxn/oracopy/%U';  
  allocate channel c2 device type disk format '/nfsfsxn/oracopy/%U';  
  allocate channel c3 device type disk format '/nfsfsxn/oracopy/%U';  
  allocate channel c4 device type disk format '/nfsfsxn/oracopy/%U';  
  delete obsolete;  
  sql 'alter system archive log current';  
  recover copy of database with tag 'OraCopyBKUPonFSxN_level_0';  
  backup incremental level 1 copies=1 for recover of copy with tag  
'OraCopyBKUPonFSxN_level_0' database;  
}
```

5. Sul server EC2 DB, accedi a RMAN localmente come utente Oracle con o senza catalogo RMAN. In questa dimostrazione non ci stiamo connettendo a un catalogo RMAN.

```
rman target / nocatalog;
```

output:

```
[oracle@ip-172-30-15-99 ~]$ rman target / nocatalog;
```

```
Recovery Manager: Release 19.0.0.0.0 - Production on Wed May 24  
17:44:49 2023  
Version 19.18.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights  
reserved.
```

```
connected to target database: DB1 (DBID=1730530050)  
using target database control file instead of recovery catalog
```

```
RMAN>
```

6. Dal prompt RMAN, eseguire lo script. La prima esecuzione crea una copia dell'immagine del database di base, mentre le esecuzioni successive uniscono e aggiornano la copia dell'immagine di base in modo incrementale. Di seguito viene descritto come eseguire lo script e il risultato tipico. Imposta il numero di canali in modo che corrisponda ai core della CPU sull'host.

```
RMAN> @/home/oracle/rman_bkup_merge.cmd
```

```

RMAN> RUN
2> {
3>  allocate channel c1 device type disk format
   '/nfsfsxn/oracopy/%U';
4>  allocate channel c2 device type disk format
   '/nfsfsxn/oracopy/%U';
5>  allocate channel c3 device type disk format
   '/nfsfsxn/oracopy/%U';
6>  allocate channel c4 device type disk format
   '/nfsfsxn/oracopy/%U';
7>  delete obsolete;
8>  sql 'alter system archive log current';
9>  recover copy of database with tag 'OraCopyBKUPonFSxN_level_0';
10> backup incremental level 1 copies=1 for recover of copy with
tag 'OraCopyBKUPonFSxN_level_0' database;
11> }

allocated channel: c1
channel c1: SID=411 device type=DISK

allocated channel: c2
channel c2: SID=146 device type=DISK

allocated channel: c3
channel c3: SID=402 device type=DISK

allocated channel: c4
channel c4: SID=37 device type=DISK

Starting recover at 17-MAY-23
no copy of datafile 1 found to recover
no copy of datafile 3 found to recover
no copy of datafile 4 found to recover
no copy of datafile 5 found to recover
no copy of datafile 6 found to recover
no copy of datafile 7 found to recover
.
.
Finished recover at 17-MAY-23

Starting backup at 17-MAY-23
channel c1: starting incremental level 1 datafile backup set
channel c1: specifying datafile(s) in backup set
input datafile file number=00022
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.287.113
7018311

```

```
input datafile file number=00026
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.291.113
7018481
input datafile file number=00030
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.295.113
7018787
input datafile file number=00011
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/undotbs1.27
1.1136668041
input datafile file number=00035
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.300.113
7019181
channel c1: starting piece 1 at 17-MAY-23
channel c2: starting incremental level 1 datafile backup set
channel c2: specifying datafile(s) in backup set
input datafile file number=00023
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.288.113
7018359
input datafile file number=00027
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.292.113
7018523
input datafile file number=00031
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.296.113
7018837
input datafile file number=00009
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/system.272.
1136668041
input datafile file number=00034
name=+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.299.113
7019117
.
.
Finished backup at 17-MAY-23

Starting Control File and SPFILE Autobackup at 17-MAY-23
piece
handle=+LOGS/DB1/AUTOBACKUP/2023_05_17/s_1137095435.367.1137095435
comment=NONE
Finished Control File and SPFILE Autobackup at 17-MAY-23
released channel: c1
released channel: c2
released channel: c3
released channel: c4

RMAN> **end-of-file**
```

7. Elenca la copia dell'immagine del database dopo il backup per verificare che sia stata creata una copia dell'immagine del database nel punto di montaggio NFS di FSx ONTAP .

```

RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';

List of Datafile Copies
=====

Key          File S Completion Time Ckp SCN      Ckp Time      Sparse
-----
19           1    A 17-MAY-23      3009819      17-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      SYSTEM_FNO-1_0h1sd7ae
      Tag: ORACOPYBKUPONFSXN_LEVEL_0

20           3    A 17-MAY-23      3009826      17-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      SYSAUX_FNO-3_0i1sd7at
      Tag: ORACOPYBKUPONFSXN_LEVEL_0

21           4    A 17-MAY-23      3009830      17-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      UNDOTBS1_FNO-4_0j1sd7b4
      Tag: ORACOPYBKUPONFSXN_LEVEL_0

27           5    A 17-MAY-23      2383520      12-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      SYSTEM_FNO-5_0p1sd7cf
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 2, PDB Name: PDB$SEED

26           6    A 17-MAY-23      2383520      12-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      SYSAUX_FNO-6_0o1sd7c8
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 2, PDB Name: PDB$SEED

34           7    A 17-MAY-23      3009907      17-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
      7_101sd7dl
      Tag: ORACOPYBKUPONFSXN_LEVEL_0

33           8    A 17-MAY-23      2383520      12-MAY-23     NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
      UNDOTBS1_FNO-8_0v1sd7di
      Tag: ORACOPYBKUPONFSXN_LEVEL_0

```

Container ID: 2, PDB Name: PDB\$SEED

```
28      9      A 17-MAY-23      3009871      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-9_0q1sd7cm
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 3, PDB Name: DB1_PDB1

22      10     A 17-MAY-23      3009849      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-10_0k1sd7bb
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 3, PDB Name: DB1_PDB1

25      11     A 17-MAY-23      3009862      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-11_0n1sd7c1
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 3, PDB Name: DB1_PDB1

35      12     A 17-MAY-23      3009909      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
12_111sd7dm
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 3, PDB Name: DB1_PDB1

29      13     A 17-MAY-23      3009876      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-13_0r1sd7ct
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 4, PDB Name: DB1_PDB2

23      14     A 17-MAY-23      3009854      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-14_0l1sd7bi
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 4, PDB Name: DB1_PDB2

31      15     A 17-MAY-23      3009900      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-15_0t1sd7db
      Tag: ORACOPYBKUPONFSXN_LEVEL_0
      Container ID: 4, PDB Name: DB1_PDB2

36      16     A 17-MAY-23      3009911      17-MAY-23      NO
      Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
```

```

16_121sd7dn
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 4, PDB Name: DB1_PDB2

30      17      A 17-MAY-23      3009895      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-17_0s1sd7d4
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 5, PDB Name: DB1_PDB3

24      18      A 17-MAY-23      3009858      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-18_0m1sd7bq
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 5, PDB Name: DB1_PDB3

32      19      A 17-MAY-23      3009903      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-19_0u1sd7de
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 5, PDB Name: DB1_PDB3

37      20      A 17-MAY-23      3009914      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
20_131sd7do
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 5, PDB Name: DB1_PDB3

4       21      A 17-MAY-23      3009019      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
21_021sd6pv
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 3, PDB Name: DB1_PDB1

5       22      A 17-MAY-23      3009419      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
22_031sd6r2
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 3, PDB Name: DB1_PDB1

6       23      A 17-MAY-23      3009460      17-MAY-23      NO
    Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
23_041sd6s5
    Tag: ORACOPYBKUPONFSXN_LEVEL_0
    Container ID: 3, PDB Name: DB1_PDB1

```

7	24	A	17-MAY-23	3009473	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
24_051sd6t9						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
8	25	A	17-MAY-23	3009502	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
25_061sd6uc						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
9	26	A	17-MAY-23	3009548	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
26_071sd6vf						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
10	27	A	17-MAY-23	3009576	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
27_081sd70i						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
11	28	A	17-MAY-23	3009590	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
28_091sd71l						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
12	29	A	17-MAY-23	3009619	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
29_0a1sd72o						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
13	30	A	17-MAY-23	3009648	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
30_0b1sd73r						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
14	31	A	17-MAY-23	3009671	17-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
31_0c1sd74u						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						

```

Container ID: 3, PDB Name: DB1_PDB1

15      32      A 17-MAY-23      3009729      17-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_0d1sd762
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

16      33      A 17-MAY-23      3009743      17-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_0e1sd775
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

17      34      A 17-MAY-23      3009771      17-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_0f1sd788
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

18      35      A 17-MAY-23      3009805      17-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_0g1sd79b
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

```

RMAN>

8. Schema del report dal prompt dei comandi Oracle RMAN per verificare che i file di dati del database attivi correnti si trovino nel gruppo di dischi ASM +DATA dell'archiviazione primaria.

```

RMAN> report schema;

Report of database schema for database with db_unique_name DB1

List of Permanent Datafiles
=====
File Size(MB) Tablespace          RB segs Datafile Name
-----
1      1060      SYSTEM          YES
+DATA/DB1/DATAFILE/system.257.1136666315
3      810      SYSAUX          NO
+DATA/DB1/DATAFILE/sysaux.258.1136666361
4      675      UNDOTBS1        YES
+DATA/DB1/DATAFILE/undotbs1.259.1136666385

```

```

5      400      PDB$SEED:SYSTEM      NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/system.266.11366
67165
6      460      PDB$SEED:SYSAUX      NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/sysaux.267.11366
67165
7      5        USERS      NO
+DATA/DB1/DATAFILE/users.260.1136666387
8      230      PDB$SEED:UNDOTBS1     NO
+DATA/DB1/86B637B62FE07A65E053F706E80A27CA/DATAFILE/undotbs1.268.113
6667165
9      400      DB1_PDB1:SYSTEM      YES
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/system.272.11366
68041
10     490      DB1_PDB1:SYSAUX      NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/sysaux.273.11366
68041
11     465      DB1_PDB1:UNDOTBS1     YES
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/undotbs1.271.113
6668041
12     5        DB1_PDB1:USERS      NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/users.275.113666
8057
13     400      DB1_PDB2:SYSTEM      YES
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/system.277.11366
68057
14     470      DB1_PDB2:SYSAUX      NO
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/sysaux.278.11366
68057
15     235      DB1_PDB2:UNDOTBS1     YES
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/undotbs1.276.113
6668057
16     5        DB1_PDB2:USERS      NO
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/DATAFILE/users.280.113666
8071
17     400      DB1_PDB3:SYSTEM      YES
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/system.282.11366
68073
18     470      DB1_PDB3:SYSAUX      NO
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/sysaux.283.11366
68073
19     235      DB1_PDB3:UNDOTBS1     YES
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/undotbs1.281.113
6668073
20     5        DB1_PDB3:USERS      NO
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/DATAFILE/users.285.113666

```

8087

21 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.286.11370182
39

22 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.287.11370183
11

23 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.288.11370183
59

24 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.289.11370184
05

25 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.290.11370184
43

26 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.291.11370184
81

27 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.292.11370185
23

28 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.293.11370187
07

29 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.294.11370187
45

30 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.295.11370187
87

31 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.296.11370188
37

32 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.297.11370189
35

33 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.298.11370190
77

34 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.299.11370191
17

35 4096 DB1_PDB1:SOE NO
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/DATAFILE/soe.300.11370191
81

List of Temporary Files

=====

File	Size (MB)	Tablespace	Maxsize (MB)	Tempfile Name
1	123	TEMP	32767	+DATA/DB1/TEMPFILE/temp.265.1136666447
2	123	PDB\$SEED:TEMP	32767	+DATA/DB1/FB864A929AEB79B9E053630F1EAC7046/TEMPFILE/temp.269.1136667185
3	10240	DB1_PDB1:TEMP	32767	+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/TEMPFILE/temp.274.1136668051
4	123	DB1_PDB2:TEMP	32767	+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/TEMPFILE/temp.279.1136668067
5	123	DB1_PDB3:TEMP	32767	+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/TEMPFILE/temp.284.1136668081

RMAN>

9. Convalida la copia dell'immagine del database dal punto di montaggio NFS del sistema operativo.

```
[oracle@ip-172-30-15-99 ~]$ ls -l /nfsfsxn/oracopy/
total 70585148
-rw-r----- 1 oracle asm 4294975488 May 17 18:09 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_021sd6pv
-rw-r----- 1 oracle asm 4294975488 May 17 18:10 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_031sd6r2
-rw-r----- 1 oracle asm 4294975488 May 17 18:10 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_041sd6s5
-rw-r----- 1 oracle asm 4294975488 May 17 18:11 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_051sd6t9
-rw-r----- 1 oracle asm 4294975488 May 17 18:11 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_061sd6uc
-rw-r----- 1 oracle asm 4294975488 May 17 18:12 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_071sd6vf
-rw-r----- 1 oracle asm 4294975488 May 17 18:13 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_081sd70i
-rw-r----- 1 oracle asm 4294975488 May 17 18:13 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_091sd71l
-rw-r----- 1 oracle asm 4294975488 May 17 18:14 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_0a1sd72o
-rw-r----- 1 oracle asm 4294975488 May 17 18:14 data_D-DB1_I-
```

```
1730530050_TS-SOE_FNO-30_0b1sd73r
-rw-r----- 1 oracle asm 4294975488 May 17 18:15 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_0c1sd74u
-rw-r----- 1 oracle asm 4294975488 May 17 18:16 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_0d1sd762
-rw-r----- 1 oracle asm 4294975488 May 17 18:16 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_0e1sd775
-rw-r----- 1 oracle asm 4294975488 May 17 18:17 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_0f1sd788
-rw-r----- 1 oracle asm 4294975488 May 17 18:17 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_0g1sd79b
-rw-r----- 1 oracle asm 513810432 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_0k1sd7bb
-rw-r----- 1 oracle asm 492838912 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_0l1sd7bi
-rw-r----- 1 oracle asm 492838912 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-18_0m1sd7bq
-rw-r----- 1 oracle asm 849354752 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_0i1sd7at
-rw-r----- 1 oracle asm 482353152 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_0o1sd7c8
-rw-r----- 1 oracle asm 1111498752 May 17 18:18 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_0h1sd7ae
-rw-r----- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_0r1sd7ct
-rw-r----- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-17_0s1sd7d4
-rw-r----- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_0p1sd7cf
-rw-r----- 1 oracle asm 419438592 May 17 18:19 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_0q1sd7cm
-rw-r----- 1 oracle asm 487596032 May 17 18:18 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1
-rw-r----- 1 oracle asm 246423552 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db
-rw-r----- 1 oracle asm 246423552 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de
-rw-r----- 1 oracle asm 707796992 May 17 18:18 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4
-rw-r----- 1 oracle asm 241180672 May 17 18:19 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di
-rw-r----- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_1l1sd7dm
-rw-r----- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
1730530050_TS-USERS_FNO-16_1t1sd7dn
-rw-r----- 1 oracle asm 5251072 May 17 18:19 data_D-DB1_I-
```

```
1730530050_TS-USERS_FNO-20_131sd7do  
-rw-r----- 1 oracle asm      5251072 May 17 18:19 data_D-DB1_I-  
1730530050_TS-USERS_FNO-7_101sd7d1
```

Questo completa la configurazione del backup e dell'unione della copia dell'immagine di standby del database Oracle.

Passa Oracle DB alla copia dell'immagine per un rapido ripristino

In caso di guasto dovuto a un problema di archiviazione primaria, come perdita o danneggiamento dei dati, il database può essere rapidamente convertito in una copia dell'immagine sul mount NFS FSx ONTAP e ripristinato allo stato corrente senza dover ripristinare il database. L'eliminazione del ripristino dei supporti velocizza enormemente il ripristino del database per un VLDB. Questo caso d'uso presuppone che l'istanza host del database sia intatta e che il file di controllo del database, i log archiviati e quelli correnti siano tutti disponibili per il ripristino.

1. Accedi all'host del server EC2 DB come utente Oracle e crea una tabella di prova prima di passare.

```
[ec2-user@ip-172-30-15-99 ~]$ sudo su
[root@ip-172-30-15-99 ec2-user]# su - oracle
Last login: Thu May 18 14:22:34 UTC 2023
[oracle@ip-172-30-15-99 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Thu May 18 14:30:36
2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> show pdbs

          CON_ID  CON_NAME                                OPEN MODE  RESTRICTED
-----
          2  PDB$SEED                                READ ONLY  NO
          3  DB1_PDB1                                READ WRITE NO
          4  DB1_PDB2                                READ WRITE NO
          5  DB1_PDB3                                READ WRITE NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> create table test (id integer, dt timestamp, event
varchar(100));

Table created.

SQL> insert into test values(1, sysdate, 'test oracle incremental
merge switch to copy');
```

```

1 row created.

SQL> commit;

Commit complete.

SQL> select * from test;

          ID
-----
DT
-----
EVENT
-----
          1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

SQL>

```

2. Simula un errore arrestando e interrompendo il database, quindi avvia Oracle nella fase di montaggio.

```

SQL> shutdown abort;
ORACLE instance shut down.
SQL> startup mount;
ORACLE instance started.

Total System Global Area 1.2885E+10 bytes
Fixed Size                  9177880 bytes
Variable Size              1778384896 bytes
Database Buffers           1.1073E+10 bytes
Redo Buffers                24375296 bytes
Database mounted.
SQL>

```

3. Come utente Oracle, connessi al database Oracle tramite RMAN per cambiare il database da copiare.

```

RMAN> switch database to copy;

datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_0h1sd7ae"

```

datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_0i1sd7at"
datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4"
datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_0p1sd7cf"
datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_0o1sd7c8"
datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_101sd7dl"
datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di"
datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm"
datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb"
datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1"
datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_1l1sd7dm"
datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_0r1sd7ct"
datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_0l1sd7bi"
datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db"
datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn"
datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_0s1sd7d4"
datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_0m1sd7bq"
datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de"
datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_131sd7do"
datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv"
datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_031sd6r2"
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5"
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_051sd6t9"
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc"

```

datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-26_071sd6vf"
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_081sd70i"
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-28_091sd711"
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-29_0a1sd72o"
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-30_0b1sd73r"
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u"
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-32_0d1sd762"
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-33_0e1sd775"
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788"
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-35_0g1sd79b"

```

4. Ripristina e apri il database per aggiornarlo allo stato corrente dell'ultimo backup incrementale.

```

RMAN> recover database;

Starting recover at 18-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=392 device type=DISK
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00009: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm
destination for restore of datafile 00023: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5
destination for restore of datafile 00027: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_081sd70i
destination for restore of datafile 00031: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u
destination for restore of datafile 00034: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/321sfous_98_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/321sfous_98_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0

```

```
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00010: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb
destination for restore of datafile 00021: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv
destination for restore of datafile 00025: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc
.
.
.
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00016: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/3i1sfov0_114_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/3i1sfov0_114_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01
channel ORA_DISK_1: starting incremental datafile backup set restore
channel ORA_DISK_1: specifying datafile(s) to restore from backup
set
destination for restore of datafile 00020: /nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-20_131sd7do
channel ORA_DISK_1: reading from backup piece
/nfsfsxn/oracopy/3j1sfov0_115_1_1
channel ORA_DISK_1: piece handle=/nfsfsxn/oracopy/3j1sfov0_115_1_1
tag=ORACOPYBKUPONFSXN_LEVEL_0
channel ORA_DISK_1: restored backup piece 1
channel ORA_DISK_1: restore complete, elapsed time: 00:00:01

starting media recovery
media recovery complete, elapsed time: 00:00:01

Finished recover at 18-MAY-23

RMAN> alter database open;

Statement processed
```

RMAN>

5. Controllare la struttura del database da sqlplus dopo il ripristino per osservare che tutti i file di dati del database, ad eccezione dei file di controllo, temporanei e di registro correnti, sono ora trasferiti per la copia sul file system NFS FSx ONTAP .

```
SQL> select name from v$datafile
       2 union
       3 select name from v$tempfile
       4 union
       5 select name from v$controlfile
       6 union
       7 select member from v$logfile;
```

NAME

```
-----
+DATA/DB1/CONTROLFILE/current.261.1136666435
+DATA/DB1/FB864A929AEB79B9E053630F1EAC7046/TEMPFILE/temp.269.1136667
185
+DATA/DB1/FB867DA8C68C816EE053630F1EAC2BCF/TEMPFILE/temp.274.1136668
051
+DATA/DB1/FB867EA89ECF81C0E053630F1EACB901/TEMPFILE/temp.279.1136668
067
+DATA/DB1/FB867F8A4D4F821CE053630F1EAC69CC/TEMPFILE/temp.284.1136668
081
+DATA/DB1/ONLINELOG/group_1.262.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/TEMPFILE/temp.265.1136666447
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_021sd6pv
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_031sd6r2
```

NAME

```
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_041sd6s5
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_051sd6t9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_061sd6uc
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_071sd6vf
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_081sd70i
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_091sd711
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_0a1sd72o
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_0b1sd73r
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_0c1sd74u
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-32_0d1sd762
```

```
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-33_0e1sd775
```

```
NAME
```

```
-----  
-----
```

```
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-34_0f1sd788  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_0g1sd79b  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_0k1sd7bb  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_0l1sd7bi  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_0m1sd7bq  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_0i1sd7at  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_0o1sd7c8  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_0r1sd7ct  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_0s1sd7d4  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_0h1sd7ae  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_0p1sd7cf
```

```
NAME
```

```
-----  
-----
```

```
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_0q1sd7cm  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_0n1sd7c1  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_0t1sd7db  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_0u1sd7de  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_0j1sd7b4  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_0v1sd7di  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_1l1sd7dm  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_121sd7dn  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_131sd7do  
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_101sd7dl
```

```
43 rows selected.
```

```
SQL>
```

6. Da SQL plus, controlla il contenuto della tabella di test che abbiamo inserito prima di passare alla copia

```

SQL> show pdbs

      CON_ID CON_NAME                                OPEN MODE  RESTRICTED
-----
      2 PDB$SEED                                     READ ONLY  NO
      3 DB1_PDB1                                     READ WRITE NO
      4 DB1_PDB2                                     READ WRITE NO
      5 DB1_PDB3                                     READ WRITE NO
SQL> alter session set container=db1_pdb1;

Session altered.

SQL> select * from test;

      ID
-----
DT
-----
EVENT
-----

      1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

SQL>

```

7. È possibile eseguire il database Oracle nel montaggio NFS FSx per un periodo prolungato senza alcuna penalizzazione delle prestazioni, poiché FSx ONTAP è uno storage ridondante di livello produttivo che garantisce prestazioni elevate. Una volta risolto il problema di archiviazione primaria, è possibile ripristinarlo invertendo i processi di unione dei backup incrementali con tempi di inattività minimi.

Ripristino del database Oracle dalla copia dell'immagine su un host di istanza del database EC2 diverso

In caso di errore, quando vengono persi sia l'archiviazione primaria sia l'host dell'istanza del database EC2, il ripristino non può essere eseguito dal server originale. Fortunatamente, hai ancora una copia dell'immagine di backup del database Oracle sul file system NFS FSx ONTAP ridondante. È possibile predisporre rapidamente un'altra istanza identica di EC2 DB e montare facilmente la copia immagine del VLDB sul nuovo host EC2 DB tramite NFS per eseguire il ripristino. In questa sezione illustreremo passo dopo passo le procedure per farlo.

1. Inserire una riga per testare la tabella creata in precedenza per il ripristino del database Oracle sulla convalida host alternativa.

```
[oracle@ip-172-30-15-99 ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Tue May 30 17:21:05
2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> show pdbs

          CON_ID CON_NAME                                OPEN MODE  RESTRICTED
-----
          2 PDB$SEED                                READ ONLY  NO
          3 DB1_PDB1                                READ WRITE NO
          4 DB1_PDB2                                READ WRITE NO
          5 DB1_PDB3                                READ WRITE NO
SQL> alter session set container=db1_pdb1;

Session altered.

SQL> insert into test values(2, sysdate, 'test recovery on a new EC2
instance host with image copy on FSx ONTAP');

1 row created.

SQL> commit;

Commit complete.

SQL> select * from test;
```

```

          ID
-----
DT
-----
EVENT
-----
          1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy

          2
30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSx
ONTAP

SQL>

```

2. Come utente Oracle, esegui il backup incrementale RMAN e unisci per svuotare la transazione nel set di backup sul mount NFS FSx ONTAP .

```

[oracle@ip-172-30-15-99 ~]$ rman target / nocatalog

Recovery Manager: Release 19.0.0.0.0 - Production on Tue May 30
17:26:03 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

connected to target database: DB1 (DBID=1730530050)
using target database control file instead of recovery catalog

RMAN> @rman_bkup_merge.cmd

```

3. Arrestare l'host dell'istanza primaria del database EC2 per simulare un guasto totale dell'host del server di archiviazione e del database.
4. Privilegiare un nuovo host di istanza EC2 DB ora_02 con lo stesso sistema operativo e versione tramite la console AWS EC2. Configurare il kernel del sistema operativo con le stesse patch dell'host del server DB EC2 primario, Oracle preinstallare RPM e aggiungere anche spazio di swap all'host. Installare la stessa versione e le stesse patch di Oracle presenti nell'host del server DB EC2 primario con l'opzione solo software. Queste attività possono essere automatizzate con il toolkit di automazione NetApp disponibile ai link sottostanti.

Kit di strumenti:"na_oracle19c_deploy" Documentazione:"Distribuzione automatizzata di Oracle19c per ONTAP su NFS"

5. Configurare l'ambiente Oracle in modo simile all'host dell'istanza primaria del database EC2 ora_01, ad esempio oratab, oraInst.loc e l'utente Oracle .bash_profile. È buona norma eseguire il backup di tali file sul punto di montaggio NFS di FSx ONTAP .
6. La copia dell'immagine di backup del database Oracle sul mount NFS FSx ONTAP viene archiviata su un cluster FSx che si estende su più zone di disponibilità AWS per garantire ridondanza, elevata disponibilità e prestazioni elevate. Il file system NFS può essere facilmente montato su un nuovo server, purché la rete sia raggiungibile. Le seguenti procedure montano la copia dell'immagine di un backup Oracle VLDB sull'host dell'istanza EC2 DB appena fornita per il ripristino.

Come utente ec2, crea il punto di montaggio.

```
sudo mkdir /nfsfsxn
```

Come utente ec2, monta il volume NFS in cui è archiviata la copia dell'immagine di backup di Oracle VLDB.

```
sudo mount 172.30.15.19:/ora_01_copy /nfsfsxn -o  
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsz=262144,wsz=262144,noi  
tr
```

7. Convalida la copia dell'immagine di backup del database Oracle sul punto di montaggio NFS FSx ONTAP .

```
[ec2-user@ip-172-30-15-124 ~]$ ls -ltr /nfsfsxn/oracopy  
total 78940700  
-rw-r-----. 1 oracle 54331 482353152 May 26 18:45 data_D-DB1_I-  
1730530050_TS-SYSAUX_FNO-6_4m1t508t  
-rw-r-----. 1 oracle 54331 419438592 May 26 18:45 data_D-DB1_I-  
1730530050_TS-SYSTEM_FNO-5_4q1t509n  
-rw-r-----. 1 oracle 54331 241180672 May 26 18:45 data_D-DB1_I-  
1730530050_TS-UNDOTBS1_FNO-8_4t1t50a6  
-rw-r-----. 1 oracle 54331 450560 May 30 15:29 6b1tf6b8_203_1_1  
-rw-r-----. 1 oracle 54331 663552 May 30 15:29 6c1tf6b8_204_1_1  
-rw-r-----. 1 oracle 54331 122880 May 30 15:29 6d1tf6b8_205_1_1  
-rw-r-----. 1 oracle 54331 507904 May 30 15:29 6e1tf6b8_206_1_1  
-rw-r-----. 1 oracle 54331 4259840 May 30 15:29 6f1tf6b9_207_1_1  
-rw-r-----. 1 oracle 54331 9060352 May 30 15:29 6h1tf6b9_209_1_1  
-rw-r-----. 1 oracle 54331 442368 May 30 15:29 6i1tf6b9_210_1_1  
-rw-r-----. 1 oracle 54331 475136 May 30 15:29 6j1tf6bb_211_1_1  
-rw-r-----. 1 oracle 54331 48660480 May 30 15:29 6g1tf6b9_208_1_1  
-rw-r-----. 1 oracle 54331 589824 May 30 15:29 6l1tf6bb_213_1_1  
-rw-r-----. 1 oracle 54331 606208 May 30 15:29 6m1tf6bb_214_1_1  
-rw-r-----. 1 oracle 54331 368640 May 30 15:29 6o1tf6bb_216_1_1
```

```

-rw-r-----. 1 oracle 54331      368640 May 30 15:29 6p1tf6bc_217_1_1
-rw-r-----. 1 oracle 54331      57344 May 30 15:29 6r1tf6bc_219_1_1
-rw-r-----. 1 oracle 54331      57344 May 30 15:29 6s1tf6bc_220_1_1
-rw-r-----. 1 oracle 54331      57344 May 30 15:29 6t1tf6bc_221_1_1
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_3q1t4ut3
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_3o1t4ut2
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_461t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_3s1t4v1a
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_3p1t4ut3
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_4a1t5015
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_481t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_4d1t5058
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_451t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_3r1t4ut3
-rw-r-----. 1 oracle 54331 555753472 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_4i1t5083
-rw-r-----. 1 oracle 54331 429924352 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_4n1t509m
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-30_491t5014
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_471t4vt7
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_4e1t5059
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_4b1t501u
-rw-r-----. 1 oracle 54331 487596032 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_411t508t
-rw-r-----. 1 oracle 54331 4294975488 May 30 17:26 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_4c1t501v
-rw-r-----. 1 oracle 54331 5251072 May 30 17:26 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_4v1t50aa
-rw-r-----. 1 oracle 54331 1121984512 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_4f1t506m
-rw-r-----. 1 oracle 54331 707796992 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_4h1t5083

```

```

-rw-r-----. 1 oracle 54331 534781952 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_4j1t508s
-rw-r-----. 1 oracle 54331 429924352 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_4o1t509m
-rw-r-----. 1 oracle 54331 429924352 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-17_4p1t509m
-rw-r-----. 1 oracle 54331 534781952 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-18_4k1t508t
-rw-r-----. 1 oracle 54331 1027612672 May 30 17:26 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_4g1t506m
-rw-r-----. 1 oracle 54331 5251072 May 30 17:26 data_D-DB1_I-
1730530050_TS-USERS_FNO-7_4u1t50a6
-rw-r-----. 1 oracle 54331 246423552 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_4r1t50a6
-rw-r-----. 1 oracle 54331 5251072 May 30 17:26 data_D-DB1_I-
1730530050_TS-USERS_FNO-16_501t50ad
-rw-r-----. 1 oracle 54331 246423552 May 30 17:26 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_4s1t50a6
-rw-r-----. 1 oracle 54331 5251072 May 30 17:26 data_D-DB1_I-
1730530050_TS-USERS_FNO-20_511t50ad
-rw-r-----. 1 oracle 54331 2318712832 May 30 17:32 721tfd6b_226_1_1
-rw-r-----. 1 oracle 54331 1813143552 May 30 17:33 701tfd6a_224_1_1
-rw-r-----. 1 oracle 54331 966656 May 30 17:33 731tfdic_227_1_1
-rw-r-----. 1 oracle 54331 5980160 May 30 17:33 751tfdij_229_1_1
-rw-r-----. 1 oracle 54331 458752 May 30 17:33 761tfdin_230_1_1
-rw-r-----. 1 oracle 54331 458752 May 30 17:33 771tfdiq_231_1_1
-rw-r-----. 1 oracle 54331 11091968 May 30 17:33 741tfdij_228_1_1
-rw-r-----. 1 oracle 54331 401408 May 30 17:33 791tfdit_233_1_1
-rw-r-----. 1 oracle 54331 2070708224 May 30 17:33 6v1tfd6a_223_1_1
-rw-r-----. 1 oracle 54331 376832 May 30 17:33 7a1tfdit_234_1_1
-rw-r-----. 1 oracle 54331 1874903040 May 30 17:33 711tfd6b_225_1_1
-rw-r-----. 1 oracle 54331 303104 May 30 17:33 7c1tfdiu_236_1_1
-rw-r-----. 1 oracle 54331 319488 May 30 17:33 7d1tfdiv_237_1_1
-rw-r-----. 1 oracle 54331 57344 May 30 17:33 7f1tfdiv_239_1_1
-rw-r-----. 1 oracle 54331 57344 May 30 17:33 7g1tfdiv_240_1_1
-rw-r-----. 1 oracle 54331 57344 May 30 17:33 7h1tfdiv_241_1_1
-rw-r--r--. 1 oracle 54331 12720 May 30 17:33 db1_ctl.sql
-rw-r-----. 1 oracle 54331 11600384 May 30 17:54 bct_db1.ctf

```

8. Verificare i log archiviati Oracle disponibili sul mount NFS FSx ONTAP per il ripristino e annotare il numero di sequenza dell'ultimo file di log. In questo caso è 175. Il nostro punto di ripristino è fino al numero di sequenza del registro 176.

```

[ec2-user@ip-172-30-15-124 ~]$ ls -ltr
/nfsfsxn/archlog/DB1/archivelog/2023_05_30
total 5714400

```

```

-r--r----- . 1 oracle 54331      321024 May 30 14:59
ol_mf_1_140__003t9mvn_.arc
-r--r----- . 1 oracle 54331      48996352 May 30 15:29
ol_mf_1_141__01t9qf6r_.arc
-r--r----- . 1 oracle 54331 167477248 May 30 15:44
ol_mf_1_142__02n3x2qb_.arc
-r--r----- . 1 oracle 54331 165684736 May 30 15:46
ol_mf_1_143__02rotwyb_.arc
-r--r----- . 1 oracle 54331 165636608 May 30 15:49
ol_mf_1_144__02x563wh_.arc
-r--r----- . 1 oracle 54331 168408064 May 30 15:51
ol_mf_1_145__031kg2co_.arc
-r--r----- . 1 oracle 54331 169446400 May 30 15:54
ol_mf_1_146__035xpcdt_.arc
-r--r----- . 1 oracle 54331 167595520 May 30 15:56
ol_mf_1_147__03bds8qf_.arc
-r--r----- . 1 oracle 54331 169270272 May 30 15:59
ol_mf_1_148__03gyt7rx_.arc
-r--r----- . 1 oracle 54331 170712576 May 30 16:01
ol_mf_1_149__03mfxl7v_.arc
-r--r----- . 1 oracle 54331 170744832 May 30 16:04
ol_mf_1_150__03qzz0ty_.arc
-r--r----- . 1 oracle 54331 169380864 May 30 16:06
ol_mf_1_151__03wgxdry_.arc
-r--r----- . 1 oracle 54331 169833984 May 30 16:09
ol_mf_1_152__040y85v3_.arc
-r--r----- . 1 oracle 54331 165134336 May 30 16:20
ol_mf_1_153__04ox946w_.arc
-r--r----- . 1 oracle 54331 169929216 May 30 16:22
ol_mf_1_154__04rbv7n8_.arc
-r--r----- . 1 oracle 54331 171903488 May 30 16:23
ol_mf_1_155__04tvlyvn_.arc
-r--r----- . 1 oracle 54331 179061248 May 30 16:25
ol_mf_1_156__04xgfjtl_.arc
-r--r----- . 1 oracle 54331 173593088 May 30 16:26
ol_mf_1_157__04zyg8hw_.arc
-r--r----- . 1 oracle 54331 175999488 May 30 16:27
ol_mf_1_158__052gp9mt_.arc
-r--r----- . 1 oracle 54331 179092992 May 30 16:29
ol_mf_1_159__0551wk7s_.arc
-r--r----- . 1 oracle 54331 175524352 May 30 16:30
ol_mf_1_160__057l46my_.arc
-r--r----- . 1 oracle 54331 173949440 May 30 16:32
ol_mf_1_161__05b2dmwp_.arc
-r--r----- . 1 oracle 54331 184166912 May 30 16:33
ol_mf_1_162__05drbj8n_.arc

```

```

-r--r----- . 1 oracle 54331 173026816 May 30 16:35
o1_mf_1_163__05h8lm1h_.arc
-r--r----- . 1 oracle 54331 174286336 May 30 16:36
o1_mf_1_164__05krsqmh_.arc
-r--r----- . 1 oracle 54331 166092288 May 30 16:37
o1_mf_1_165__05n378pw_.arc
-r--r----- . 1 oracle 54331 177640960 May 30 16:39
o1_mf_1_166__05pmg741_.arc
-r--r----- . 1 oracle 54331 173972992 May 30 16:40
o1_mf_1_167__05s3o01r_.arc
-r--r----- . 1 oracle 54331 178474496 May 30 16:41
o1_mf_1_168__05vmwt34_.arc
-r--r----- . 1 oracle 54331 177694208 May 30 16:43
o1_mf_1_169__05y45qdd_.arc
-r--r----- . 1 oracle 54331 170814976 May 30 16:44
o1_mf_1_170__060kgh33_.arc
-r--r----- . 1 oracle 54331 177325056 May 30 16:46
o1_mf_1_171__063ltvgv_.arc
-r--r----- . 1 oracle 54331 164455424 May 30 16:47
o1_mf_1_172__065d94fq_.arc
-r--r----- . 1 oracle 54331 178252288 May 30 16:48
o1_mf_1_173__067wnwy8_.arc
-r--r----- . 1 oracle 54331 170579456 May 30 16:50
o1_mf_1_174__06b9zdh8_.arc
-r--r----- . 1 oracle 54331 93928960 May 30 17:26
o1_mf_1_175__08c7jc2b_.arc
[ec2-user@ip-172-30-15-124 ~]$

```

9. Come utente Oracle, imposta la variabile ORACLE_HOME sull'installazione Oracle corrente sul nuovo host DB dell'istanza EC2 ora_02, ORACLE_SID sul SID dell'istanza Oracle primaria. In questo caso è db1.
10. Come utente Oracle, crea un file init Oracle generico nella directory \$ORACLE_HOME/dbs con le directory di amministrazione appropriate configurate. La cosa più importante è avere Oracle flash recovery area puntare al percorso di montaggio NFS FSx ONTAP come definito nell'istanza Oracle VLDB primaria. flash recovery area la configurazione è dimostrata nella sezione Setup Oracle RMAN incremental merge to image copy on FSx. Impostare il file di controllo Oracle sul file system NFS FSx ONTAP .

```
vi $ORACLE_HOME/dbs/initdb1.ora
```

Con le seguenti voci di esempio:

```
*.audit_file_dest='/u01/app/oracle/admin/db1/adump'  
*.audit_trail='db'  
*.compatible='19.0.0'  
*.control_files=('/nfsfsxn/oracopy/db1.ctl')  
*.db_block_size=8192  
*.db_create_file_dest='/nfsfsxn/oracopy/'  
*.db_domain='demo.netapp.com'  
*.db_name='db1'  
*.db_recovery_file_dest_size=85899345920  
*.db_recovery_file_dest='/nfsfsxn/archlog/'  
*.diagnostic_dest='/u01/app/oracle'  
*.dispatchers='(PROTOCOL=TCP) (SERVICE=db1XDB)'  
*.enable_pluggable_database=true  
*.local_listener='LISTENER'  
*.nls_language='AMERICAN'  
*.nls_territory='AMERICA'  
*.open_cursors=300  
*.pga_aggregate_target=1024m  
*.processes=320  
*.remote_login_passwordfile='EXCLUSIVE'  
*.sga_target=10240m  
*.undo_tablespace='UNDOTBS1'
```

In caso di discrepanza, il file init sopra indicato dovrebbe essere sostituito dal file init di backup ripristinato dal server Oracle DB primario.

11. Come utente Oracle, avvia RMAN per eseguire il ripristino Oracle su un nuovo host di istanza DB EC2.

```
[oracle@ip-172-30-15-124 dbs]$ rman target / nocatalog;
```

```
Recovery Manager: Release 19.0.0.0.0 - Production on Wed May 31  
00:56:07 2023  
Version 19.18.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights  
reserved.
```

```
connected to target database (not started)
```

```
RMAN> startup nomount;
```

```
Oracle instance started
```

```
Total System Global Area 12884900632 bytes
```

```
Fixed Size 9177880 bytes
```

```
Variable Size 1778384896 bytes
```

```
Database Buffers 11072962560 bytes
```

```
Redo Buffers 24375296 bytes
```

12. Imposta l'ID del database. L'ID del database può essere recuperato dal nome del file Oracle della copia dell'immagine sul punto di montaggio NFS di FSx.

```
RMAN> set dbid = 1730530050;
```

```
executing command: SET DBID
```

13. Ripristina il file di controllo dal backup automatico. Se è abilitato il backup automatico di Oracle controlfile e spfile, il backup viene eseguito a ogni ciclo di backup incrementale e di unione. Se sono disponibili più copie, verrà ripristinato l'ultimo backup.

```

RMAN> restore controlfile from autobackup;

Starting restore at 31-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=2 device type=DISK

recovery area destination: /nfsfsxn/archlog
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230531
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230530
channel ORA_DISK_1: restoring control file from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp
channel ORA_DISK_1: control file restore from AUTOBACKUP complete
output file name=/nfsfsxn/oracopy/db1.ctl
Finished restore at 31-MAY-23

```

14. Ripristinare il file init da spfile in una cartella /tmp per aggiornare in seguito il file dei parametri in modo che corrisponda all'istanza del database primario.

```

RMAN> restore spfile to pfile '/tmp/archive/initdb1.ora' from
autobackup;

Starting restore at 31-MAY-23
using channel ORA_DISK_1

recovery area destination: /nfsfsxn/archlog
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230531
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230530
channel ORA_DISK_1: restoring spfile from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp
channel ORA_DISK_1: SPFILE restore from AUTOBACKUP complete
Finished restore at 31-MAY-23

```

15. Montare il file di controllo e convalidare la copia dell'immagine di backup del database.

```
RMAN> alter database mount;
```

```
released channel: ORA_DISK_1
```

```
Statement processed
```

```
RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';
```

```
List of Datafile Copies
```

```
=====
```

Key	File S	Completion Time	Ckp SCN	Ckp Time	Sparse
316	1 A	30-MAY-23	4120170	30-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_4f1t506m				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
322	3 A	30-MAY-23	4120175	30-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_4g1t506m				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
317	4 A	30-MAY-23	4120179	30-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_4h1t5083				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
221	5 A	26-MAY-23	2383520	12-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_4q1t509n				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
	Container ID: 2, PDB Name: PDB\$SEED				
216	6 A	26-MAY-23	2383520	12-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_4m1t508t				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
	Container ID: 2, PDB Name: PDB\$SEED				
323	7 A	30-MAY-23	4120207	30-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_4u1t50a6				
	Tag: ORACOPYBKUPONFSXN_LEVEL_0				
227	8 A	26-MAY-23	2383520	12-MAY-23	NO
	Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_4t1t50a6				

```

Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 2, PDB Name: PDB$SEED

308      9      A 30-MAY-23      4120158      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-9_4nlt509m
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

307      10     A 30-MAY-23      4120166      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYS_AUX_FNO-10_4ilt5083
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

313      11     A 30-MAY-23      4120154      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-11_4l1t508t
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

315      12     A 30-MAY-23      4120162      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
12_4v1t50aa
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

319      13     A 30-MAY-23      4120191      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-13_4olt509m
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

318      14     A 30-MAY-23      4120183      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYS_AUX_FNO-14_4j1t508s
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

324      15     A 30-MAY-23      4120199      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-15_4r1t50a6
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

325      16     A 30-MAY-23      4120211      30-MAY-23      NO

```

```

Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
16_501t50ad
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

320    17    A 30-MAY-23        4120195    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-17_4p1t509m
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

321    18    A 30-MAY-23        4120187    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYS_AUX_FNO-18_4k1t508t
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

326    19    A 30-MAY-23        4120203    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-19_4s1t50a6
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

327    20    A 30-MAY-23        4120216    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
20_511t50ad
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

298    21    A 30-MAY-23        4120166    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
21_3o1t4ut2
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

302    22    A 30-MAY-23        4120154    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
22_3p1t4ut3
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

297    23    A 30-MAY-23        4120158    30-MAY-23    NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
23_3q1t4ut3
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

```

306	24	A	30-MAY-23	4120162	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
24_3r1t4ut3						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
300	25	A	30-MAY-23	4120166	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
25_3s1t4v1a						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
305	26	A	30-MAY-23	4120154	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
26_451t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
299	27	A	30-MAY-23	4120158	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
27_461t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
310	28	A	30-MAY-23	4120162	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
28_471t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
303	29	A	30-MAY-23	4120166	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
29_481t4vt7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
309	30	A	30-MAY-23	4120154	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
30_491t5014						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
301	31	A	30-MAY-23	4120158	30-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-						
31_4a1t5015						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						

```

Container ID: 3, PDB Name: DB1_PDB1

312      32      A 30-MAY-23      4120162      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_4b1t501u
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

314      33      A 30-MAY-23      4120162      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_4c1t501v
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

304      34      A 30-MAY-23      4120158      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_4d1t5058
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

311      35      A 30-MAY-23      4120154      30-MAY-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_4e1t5059
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

```

16. Cambia il database da copiare per eseguire il ripristino senza ripristinare il database.

```

RMAN> switch database to copy;

Starting implicit crosscheck backup at 31-MAY-23
allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=11 device type=DISK
Crosschecked 33 objects
Finished implicit crosscheck backup at 31-MAY-23

Starting implicit crosscheck copy at 31-MAY-23
using channel ORA_DISK_1
Crosschecked 68 objects
Finished implicit crosscheck copy at 31-MAY-23

searching for all files in the recovery area
cataloging files...
cataloging done

List of Cataloged Files

```

=====
File Name:

/nfsfsxn/archlog/DB1/autobackup/2023_05_30/o1_mf_s_1138210401__08qlx
rrr_.bkp

datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_4f1t506m"

datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_4g1t506m"

datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_4h1t5083"

datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_4q1t509n"

datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_4m1t508t"

datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-USERS_FNO-7_4u1t50a6"

datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_4t1t50a6"

datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_4n1t509m"

datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-10_4i1t5083"

datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-11_4l1t508t"

datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-12_4v1t50aa"

datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-13_4o1t509m"

datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-14_4j1t508s"

datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-15_4r1t50a6"

datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-16_501t50ad"

datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSTEM_FNO-17_4p1t509m"

datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SYSAUX_FNO-18_4k1t508t"

datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-UNDOTBS1_FNO-19_4s1t50a6"

datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-USERS_FNO-20_511t50ad"

datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-21_3o1t4ut2"

datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_D-

```
DB1_I-1730530050_TS-SOE_FNO-22_3p1t4ut3"
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-23_3q1t4ut3"
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-24_3r1t4ut3"
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-25_3s1t4v1a"
datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-26_451t4vt7"
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-27_461t4vt7"
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-28_471t4vt7"
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-29_481t4vt7"
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-30_491t5014"
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-31_4a1t5015"
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-32_4b1t501u"
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-33_4c1t501v"
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-34_4d1t5058"
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-
DB1_I-1730530050_TS-SOE_FNO-35_4e1t5059"
```

17. Esegui il ripristino di Oracle fino all'ultimo registro di archivio disponibile nell'area di ripristino flash.

```
RMAN> run {
2> set until sequence=176;
3> recover database;
4> }

executing command: SET until clause

Starting recover at 31-MAY-23
using channel ORA_DISK_1

starting media recovery

archived log for thread 1 with sequence 142 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_142__02n3x2qb_.ar
```

```
c
archived log for thread 1 with sequence 143 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_143__02rotwyb_.ar
c
archived log for thread 1 with sequence 144 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_144__02x563wh_.ar
c
archived log for thread 1 with sequence 145 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_145__031kg2co_.ar
c
archived log for thread 1 with sequence 146 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_146__035xpcdt_.ar
c
archived log for thread 1 with sequence 147 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_147__03bds8qf_.ar
c
archived log for thread 1 with sequence 148 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_148__03gyt7rx_.ar
c
archived log for thread 1 with sequence 149 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_149__03mfxl7v_.ar
c
archived log for thread 1 with sequence 150 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_150__03qzz0ty_.ar
c
archived log for thread 1 with sequence 151 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_151__03wgxdry_.ar
c
archived log for thread 1 with sequence 152 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_152__040y85v3_.ar
c
archived log for thread 1 with sequence 153 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_153__04ox946w_.ar
c
archived log for thread 1 with sequence 154 is already on disk as
```

```
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_154__04rbv7n8_.ar
c
archived log for thread 1 with sequence 155 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_155__04tvlyvn_.ar
c
archived log for thread 1 with sequence 156 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_156__04xgfjtl_.ar
c
archived log for thread 1 with sequence 157 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_157__04zyg8hw_.ar
c
archived log for thread 1 with sequence 158 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_158__052gp9mt_.ar
c
archived log for thread 1 with sequence 159 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_159__0551wk7s_.ar
c
archived log for thread 1 with sequence 160 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_160__057146my_.ar
c
archived log for thread 1 with sequence 161 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_161__05b2dmwp_.ar
c
archived log for thread 1 with sequence 162 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_162__05drbj8n_.ar
c
archived log for thread 1 with sequence 163 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_163__05h81mlh_.ar
c
archived log for thread 1 with sequence 164 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_164__05krsqmh_.ar
c
archived log for thread 1 with sequence 165 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_165__05n378pw_.ar
```

```
c
archived log for thread 1 with sequence 166 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_166__05pmg741_.ar
c
archived log for thread 1 with sequence 167 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_167__05s3o01r_.ar
c
archived log for thread 1 with sequence 168 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_168__05vmwt34_.ar
c
archived log for thread 1 with sequence 169 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_169__05y45qdd_.ar
c
archived log for thread 1 with sequence 170 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_170__060kgh33_.ar
c
archived log for thread 1 with sequence 171 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_171__0631tvgv_.ar
c
archived log for thread 1 with sequence 172 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_172__065d94fq_.ar
c
archived log for thread 1 with sequence 173 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_173__067wnwy8_.ar
c
archived log for thread 1 with sequence 174 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_174__06b9zdh8_.ar
c
archived log for thread 1 with sequence 175 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_175__08c7jc2b_.ar
c
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_142__02n3x2q
b_.arc thread=1 sequence=142
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_143__02rotwy
```

b_.arc thread=1 sequence=143
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_144__02x563w
h_.arc thread=1 sequence=144
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_145__031kg2c
o_.arc thread=1 sequence=145
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_146__035xpcd
t_.arc thread=1 sequence=146
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_147__03bds8q
f_.arc thread=1 sequence=147
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_148__03gyt7r
x_.arc thread=1 sequence=148
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_149__03mfx17
v_.arc thread=1 sequence=149
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_150__03qzz0t
y_.arc thread=1 sequence=150
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_151__03wgxdr
y_.arc thread=1 sequence=151
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_152__040y85v
3_.arc thread=1 sequence=152
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_153__04ox946
w_.arc thread=1 sequence=153
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_154__04rbv7n
8_.arc thread=1 sequence=154
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_155__04tvlyv
n_.arc thread=1 sequence=155
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_156__04xgfjt
l_.arc thread=1 sequence=156
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_157__04zyg8h
w_.arc thread=1 sequence=157
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_158__052gp9m
t_.arc thread=1 sequence=158

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_159__0551wk7
s_.arc thread=1 sequence=159

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_160__057146m
y_.arc thread=1 sequence=160

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_161__05b2dmw
p_.arc thread=1 sequence=161

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_162__05drbj8
n_.arc thread=1 sequence=162

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_163__05h81m1
h_.arc thread=1 sequence=163

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_164__05krsqm
h_.arc thread=1 sequence=164

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_165__05n378p
w_.arc thread=1 sequence=165

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_166__05pmg74
l_.arc thread=1 sequence=166

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_167__05s3o01
r_.arc thread=1 sequence=167

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_168__05vmwt3
4_.arc thread=1 sequence=168

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_169__05y45qd
d_.arc thread=1 sequence=169

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_170__060kgh3
3_.arc thread=1 sequence=170

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_171__0631tv
g_.arc thread=1 sequence=171

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_172__065d94f
q_.arc thread=1 sequence=172

archived log file

name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_173__067wnwy
8_.arc thread=1 sequence=173

archived log file

```
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_174__06b9zdh  
8_.arc thread=1 sequence=174  
archived log file  
name=/nfsfsxn/archlog/DB1/archivelog/2023_05_30/o1_mf_1_175__08c7jc2  
b_.arc thread=1 sequence=175  
media recovery complete, elapsed time: 00:48:34  
Finished recover at 31-MAY-23
```



Per un ripristino più rapido, abilitare le sessioni parallele con il parametro `recovery_parallelism` o specificare il grado di parallelismo nel comando di ripristino per il ripristino del database: `RECOVER DATABASE PARALLEL (DEGREE d INSTANCES DEFAULT) ;` . In generale, i gradi di parallelismo dovrebbero essere pari al numero di core della CPU sull'host.

18. Uscire da RMAN, accedere a Oracle come utente Oracle tramite sqlplus per aprire il database e reimpostare il registro dopo un ripristino incompleto.

```
SQL> select name, open_mode from v$database;
```

```
NAME          OPEN_MODE
-----
DB1           MOUNTED
```

```
SQL> select member from v$logfile;
```

```
MEMBER
-----
+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_1.262.1136666437
```

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_1.262.1136666437' to
'/nfsfsxn/oracopy/redo01.log';
```

Database altered.

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_2.263.1136666437' to
'/nfsfsxn/oracopy/redo02.log';
```

Database altered.

```
SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_3.264.1136666437' to
'/nfsfsxn/oracopy/redo03.log';
```

Database altered.

```
SQL> alter database open resetlogs;
```

Database altered.

19. Convalida il database ripristinato sul nuovo host che contiene la riga inserita prima dell'errore del database primario.

```
SQL> show pdbs
```

CON_ID	CON_NAME	OPEN MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO
3	DB1_PDB1	READ WRITE	NO
4	DB1_PDB2	READ WRITE	NO
5	DB1_PDB3	READ WRITE	NO

```
SQL> alter session set container=db1_pdb1;
```

Session altered.

```
SQL> select * from test;
```

EVENT	ID	DT
	1	18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy		
	2	30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSx ONTAP		

20. Altri compiti post-recupero

Add FSx ONTAP NFS mount to fstab so that the NFS file system will be mounted when EC2 instance host rebooted.

As EC2 user, vi /etc/fstab and add following entry:

```
172.30.15.19:/ora_01_copy /nfsfsxn nfs
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsize=262144,wsiz=262144,noin
tr 0 0
```

Update the Oracle init file from primary database init file backup that is restored to /tmp/archive and create spfile as needed.

In questo modo viene completato il ripristino del database Oracle VLDB dalla copia dell'immagine di backup sul file system NFS FSx ONTAP a un nuovo host di istanza DB EC2.

Copia dell'immagine standby di Oracle clonata per altri casi d'uso

Un altro vantaggio dell'utilizzo di AWS FSx ONTAP per la copia temporanea dell'immagine Oracle VLDB è che può essere FlexClonato per soddisfare molti altri scopi con un investimento minimo in termini di storage aggiuntivo. Nel seguente caso d'uso, illustriamo come creare uno snapshot e clonare il volume NFS di staging su FSx ONTAP per altri casi d'uso Oracle quali DEV, UAT, ecc.

1. Iniziamo inserendo una riga nella stessa tabella di test creata in precedenza.

```
SQL> insert into test values (3, sysdate, 'test clone on a new EC2 instance host with image copy on FSx ONTAP');
```

```
1 row created.
```

```
SQL> select * from test;
```

```
          ID
-----
DT
-----
EVENT
-----
          1
18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy
```

```
          2
30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSx
ONTAP
```

```
          ID
-----
DT
-----
EVENT
-----
          3
05-JUN-23 03.19.46.000000 PM
test clone on a new EC2 instance host with image copy on FSx ONTAP
```

```
SQL>
```

2. Eseguire un backup RMAN e unirlo alla copia dell'immagine del database FSx ONTAP in modo che la transazione venga catturata nel set di backup sul mount NFS di FSx ma non unita alla copia finché il database clonato non viene ripristinato.

```
RMAN> @/home/oracle/rman_bkup_merge.cmd
```

3. Accedi al cluster FSx tramite ssh come utente fsxadmin per osservare gli snapshot creati dalla policy di backup pianificata di Oracle e acquisire uno snapshot una tantum in modo che includa la transazione eseguita nel passaggio 1.

```
FsxId06c3c8b2a7bd56458::> vol snapshot create -vserver svm_ora
-volume ora_01_copy -snapshot one-off.2023-06-05-1137 -foreground
true
```

```
FsxId06c3c8b2a7bd56458::> snapshot show
```

```
---Blocks---
```

```
Vserver Volume Snapshot Size
Total% Used%
```

```
-----
```

```
svm_ora ora_01_copy
          daily.2023-06-02_0010 3.59GB
2% 5%
          daily.2023-06-03_0010 1.10GB
1% 1%
          daily.2023-06-04_0010 608KB
0% 0%
          daily.2023-06-05_0010 3.81GB
2% 5%
          one-off.2023-06-05-1137 168KB
0% 0%
          svm_ora_root
          weekly.2023-05-28_0015 1.86MB
0% 78%
          daily.2023-06-04_0010 152KB
0% 22%
          weekly.2023-06-04_0015 1.24MB
0% 70%
          daily.2023-06-05_0010 196KB
0% 27%
          hourly.2023-06-05_1005 156KB
0% 22%
          hourly.2023-06-05_1105 156KB
0% 22%
          hourly.2023-06-05_1205 156KB
0% 22%
          hourly.2023-06-05_1305 156KB
0% 22%
          hourly.2023-06-05_1405 1.87MB
0% 78%
          hourly.2023-06-05_1505 148KB
0% 22%
```

```
15 entries were displayed.
```

4. Clonare lo snapshot una tantum da utilizzare per creare una nuova istanza clone DB1 su un host EC2 Oracle alternativo. Hai la possibilità di clonare da qualsiasi snapshot giornaliero disponibile per il volume ora_01_copy.

```
FsxId06c3c8b2a7bd56458::> vol clone create -flexclone db1_20230605of
-type RW -parent-vserver svm_ora -parent-volume ora_01_copy
-junction-path /db1_20230605of -junction-active true -parent
-snapshot one-off.2023-06-05-1137
[Job 464] Job succeeded: Successful

FsxId06c3c8b2a7bd56458::>

FsxId06c3c8b2a7bd56458::> vol show db1*
Vserver   Volume           Aggregate      State         Type         Size
Available Used%
-----
-----
svm_ora   db1_20230605of
                aggr1          online        RW           200GB
116.6GB   38%

FsxId06c3c8b2a7bd56458::>
```

5. Disattivare la policy snapshot per il volume clonato poiché eredita la policy snapshot del volume padre, a meno che non si desideri proteggere il volume clonato, quindi lasciarla invariata.

```
FsxId06c3c8b2a7bd56458::> vol modify -volume db1_20230605of
-snapshot-policy none

Warning: You are changing the Snapshot policy on volume
"db1_20230605of" to "none". Snapshot copies on this volume that do
not match any of the prefixes of the new Snapshot policy will not be
deleted. However, when the new Snapshot policy
                takes effect, depending on the new retention count, any
existing Snapshot copies that continue to use the same prefixes
might be deleted. See the 'volume modify' man page for more
information.
Do you want to continue? {y|n}: y
Volume modify successful on volume db1_20230605of of Vserver
svm_ora.

FsxId06c3c8b2a7bd56458::>
```

6. Accedi a una nuova istanza EC2 Linux con software Oracle preinstallato con la stessa versione e livello di patch della tua istanza Oracle EC2 primaria e monta il volume clonato.

```
[ec2-user@ip-172-30-15-124 ~]$ sudo mkdir /nfsfsxn
[ec2-user@ip-172-30-15-124 ~]$ sudo mount -t nfs
172.30.15.19:/db1_20230605of /nfsfsxn -o
rw,bg,hard,vers=3,proto=tcp,timeo=600,rsiz=262144,wsiz=262144,noi
tr
```

7. Convalida i set di backup incrementali del database, la copia delle immagini e i log archiviati disponibili sul mount NFS di FSx.

```
[ec2-user@ip-172-30-15-124 ~]$ ls -ltr /nfsfsxn/oracopy
total 79450332
-rw-r----- 1 oracle 54331 482353152 Jun  1 19:02 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-6_891tkrhr
-rw-r----- 1 oracle 54331 419438592 Jun  1 19:03 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-5_8d1tkril
-rw-r----- 1 oracle 54331 241180672 Jun  1 19:03 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7
-rw-r----- 1 oracle 54331 912506880 Jun  1 20:21 8n1tkvv2_279_1_1
-rw-r----- 1 oracle 54331 925696 Jun  1 20:21 8q1tl05i_282_1_1
-rw-r----- 1 oracle 54331 1169014784 Jun  1 20:21 8p1tkvv2_281_1_1
-rw-r----- 1 oracle 54331 6455296 Jun  1 20:21 8r1tl05m_283_1_1
-rw-r----- 1 oracle 54331 139264 Jun  1 20:21 8t1tl05t_285_1_1
-rw-r----- 1 oracle 54331 3514368 Jun  1 20:21 8s1tl05t_284_1_1
-rw-r----- 1 oracle 54331 139264 Jun  1 20:21 8u1tl060_286_1_1
-rw-r----- 1 oracle 54331 425984 Jun  1 20:21 901tl062_288_1_1
-rw-r----- 1 oracle 54331 344064 Jun  1 20:21 911tl062_289_1_1
-rw-r----- 1 oracle 54331 245760 Jun  1 20:21 931tl063_291_1_1
-rw-r----- 1 oracle 54331 237568 Jun  1 20:21 941tl064_292_1_1
-rw-r----- 1 oracle 54331 57344 Jun  1 20:21 961tl065_294_1_1
-rw-r----- 1 oracle 54331 57344 Jun  1 20:21 971tl066_295_1_1
-rw-r----- 1 oracle 54331 57344 Jun  1 20:21 981tl067_296_1_1
-rw-r----- 1 oracle 54331 1040760832 Jun  1 20:23 8m1tkvv2_278_1_1
-rw-r----- 1 oracle 54331 932847616 Jun  1 20:24 8o1tkvv2_280_1_1
-rw-r----- 1 oracle 54331 1121984512 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-1_821tkrb8
-rw-r----- 1 oracle 54331 1027612672 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-3_831tkrd9
-rw-r----- 1 oracle 54331 429924352 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-9_8a1tkrhr
-rw-r----- 1 oracle 54331 707796992 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-4_851tkrgf
-rw-r----- 1 oracle 54331 534781952 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-14_871tkrhr
-rw-r----- 1 oracle 54331 534781952 Jun  5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-18_881tkrhr
```

```

-rw-r----- 1 oracle 54331 429924352 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-13_8b1tkril
-rw-r----- 1 oracle 54331 429924352 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSTEM_FNO-17_8c1tkril
-rw-r----- 1 oracle 54331 246423552 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-15_8e1tkril
-rw-r----- 1 oracle 54331 246423552 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-7_8h1tkrj9
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-16_8j1tkrja
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-20_8k1tkrjb
-rw-r----- 1 oracle 54331 5251072 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-USERS_FNO-12_8i1tkrj9
-rw-r----- 1 oracle 54331 555753472 Jun 5 15:21 data_D-DB1_I-
1730530050_TS-SYSAUX_FNO-10_861tkrgo
-rw-r----- 1 oracle 54331 796925952 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-UNDOTBS1_FNO-11_841tkrf2
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-21_7j1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-34_801tkram
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-29_7r1tkr32
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-25_7n1tkqrh
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-31_7t1tkr3i
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-33_7v1tkra6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-23_7l1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-27_7p1tkqrq
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-35_8l1tkrap
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-32_7u1tkr42
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-22_7k1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-24_7m1tkqk6
-rw-r----- 1 oracle 54331 4294975488 Jun 5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-28_7q1tkqs1

```

```

-rw-r----- 1 oracle 54331 4294975488 Jun  5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-30_7s1tkr3a
-rw-r----- 1 oracle 54331 4294975488 Jun  5 15:22 data_D-DB1_I-
1730530050_TS-SOE_FNO-26_7o1tkqrj
-rw-r----- 1 oracle 54331 1241432064 Jun  5 15:30 9d1tv06n_301_1_1
-rw-r----- 1 oracle 54331 1019805696 Jun  5 15:31 9a1tv06m_298_1_1
-rw-r----- 1 oracle 54331      4612096 Jun  5 15:31 9e1tv01d_302_1_1
-rw-r----- 1 oracle 54331  967163904 Jun  5 15:31 9b1tv06n_299_1_1
-rw-r----- 1 oracle 54331  31563776 Jun  5 15:31 9g1tv01t_304_1_1
-rw-r----- 1 oracle 54331      319488 Jun  5 15:31 9h1tv01t_305_1_1
-rw-r----- 1 oracle 54331   335872 Jun  5 15:31 9i1tv0m0_306_1_1
-rw-r----- 1 oracle 54331   565248 Jun  5 15:31 9k1tv0m1_308_1_1
-rw-r----- 1 oracle 54331   581632 Jun  5 15:31 9l1tv0m5_309_1_1
-rw-r----- 1 oracle 54331  54345728 Jun  5 15:31 9f1tv01t_303_1_1
-rw-r----- 1 oracle 54331   368640 Jun  5 15:31 9n1tv0m5_311_1_1
-rw-r----- 1 oracle 54331   385024 Jun  5 15:31 9o1tv0m6_312_1_1
-rw-r----- 1 oracle 54331  985858048 Jun  5 15:31 9c1tv06n_300_1_1
-rw-r----- 1 oracle 54331    57344 Jun  5 15:31 9q1tv0m7_314_1_1
-rw-r----- 1 oracle 54331    57344 Jun  5 15:31 9r1tv0m8_315_1_1
-rw-r----- 1 oracle 54331    57344 Jun  5 15:31 9s1tv0m9_316_1_1
-rw-r--r-- 1 oracle 54331    12720 Jun  5 15:31 db1_ctl.sql
-rw-r----- 1 oracle 54331  11600384 Jun  5 15:48 bct_db1.ctf
[ec2-user@ip-172-30-15-124 ~]$

```

```

[oracle@ip-172-30-15-124 ~]$ ls -l
/nfsfsxn/archlog/DB1/archivelog/2023_06_05
total 2008864
-rw-r----- 1 oracle 54331      729088 Jun  5 14:38
o1_mf_1_190_17vwwvt9_.arc
-rw-r----- 1 oracle 54331 166651904 Jun  5 14:44
o1_mf_1_191_17vx6vmg_.arc
-rw-r----- 1 oracle 54331 167406080 Jun  5 14:47
o1_mf_1_192_17vxctms_.arc
-rw-r----- 1 oracle 54331 166868992 Jun  5 14:49
o1_mf_1_193_17vxjjps_.arc
-rw-r----- 1 oracle 54331 166087168 Jun  5 14:52
o1_mf_1_194_17vxnxrh_.arc
-rw-r----- 1 oracle 54331 175210496 Jun  5 14:54
o1_mf_1_195_17vxswv5_.arc
-rw-r----- 1 oracle 54331 167078400 Jun  5 14:57
o1_mf_1_196_17vxylwp_.arc
-rw-r----- 1 oracle 54331 169701888 Jun  5 14:59
o1_mf_1_197_17vy3cyw_.arc
-rw-r----- 1 oracle 54331 167845376 Jun  5 15:02
o1_mf_1_198_17vy8245_.arc
-rw-r----- 1 oracle 54331 170763776 Jun  5 15:05

```

```
o1_mf_1_199_17vydv4c_.arc
-rw-r----- 1 oracle 54331 193853440 Jun  5 15:07
o1_mf_1_200_17vykf23_.arc
-rw-r----- 1 oracle 54331 165523968 Jun  5 15:09
o1_mf_1_201_17vyp1dh_.arc
-rw-r----- 1 oracle 54331 161117184 Jun  5 15:12
o1_mf_1_202_17vyvrm5_.arc
-rw-r----- 1 oracle 54331  10098176 Jun  5 15:21
o1_mf_1_203_17vzdfwm_.arc
```

8. I processi di ripristino sono ora simili al precedente caso d'uso di ripristino su una nuova istanza di EC2 DB dopo un errore: impostare l'ambiente Oracle (oratab, \$ORACLE_HOME, \$ORACLE_SID) in modo che corrisponda all'istanza di produzione primaria, creare un file init che includa db_recovery_file_dest_size e db_recovery_file_dest che punti alla directory di ripristino flash sul mount NFS di FSx. Quindi, avviare RMAN per eseguire il ripristino. Di seguito sono riportati i passaggi del comando e l'output.

```
[oracle@ip-172-30-15-124 dbs]$ rman target / nocatalog

Recovery Manager: Release 19.0.0.0.0 - Production on Wed Jun 7
14:44:33 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

connected to target database (not started)

RMAN> startup nomount;

Oracle instance started

Total System Global Area      10737418000 bytes

Fixed Size                     9174800 bytes
Variable Size                  1577058304 bytes
Database Buffers               9126805504 bytes
Redo Buffers                    24379392 bytes

RMAN> set dbid = 1730530050;

executing command: SET DBID

RMAN> restore controlfile from autobackup;

Starting restore at 07-JUN-23
```

```

allocated channel: ORA_DISK_1
channel ORA_DISK_1: SID=2 device type=DISK

recovery area destination: /nfsfsxn/archlog/
database name (or database unique name) used for search: DB1
channel ORA_DISK_1: AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_06_05/o1_mf_s_1138721482_17vzyb
vq_.bkp found in the recovery area
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230607
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230606
channel ORA_DISK_1: looking for AUTOBACKUP on day: 20230605
channel ORA_DISK_1: restoring control file from AUTOBACKUP
/nfsfsxn/archlog/DB1/autobackup/2023_06_05/o1_mf_s_1138721482_17vzyb
vq_.bkp
channel ORA_DISK_1: control file restore from AUTOBACKUP complete
output file name=/nfsfsxn/oracopy/db1.ctl
Finished restore at 07-JUN-23

```

```

RMAN> alter database mount;

```

```

released channel: ORA_DISK_1
Statement processed

```

```

RMAN> list incarnation;

```

List of Database Incarnations

DB Key	Inc Key	DB Name	DB ID	STATUS	Reset SCN	Reset Time
1	1	DB1	1730530050	PARENT	1	17-APR-19
2	2	DB1	1730530050	CURRENT	1920977	12-MAY-23

```

RMAN> list copy of database tag 'OraCopyBKUPonFSxN_level_0';

```

List of Datafile Copies

=====

Key	File S	Completion Time	Ckp SCN	Ckp Time	Sparse
362	1 A	05-JUN-23	8319160	01-JUN-23	NO

Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb8
Tag: ORACOPYBKUPONFSXN_LEVEL_0

363	3	A	05-JUN-23	8319165	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSAUX_FNO-3_831tkrd9						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
365	4	A	05-JUN-23	8319171	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
UNDOTBS1_FNO-4_851tkrgf						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
355	5	A	01-JUN-23	2383520	12-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSTEM_FNO-5_8d1tkril						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 2, PDB Name: PDB\$SEED						
349	6	A	01-JUN-23	2383520	12-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSAUX_FNO-6_891tkrhr						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 2, PDB Name: PDB\$SEED						
372	7	A	05-JUN-23	8319201	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-						
7_8h1tkrj9						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
361	8	A	01-JUN-23	2383520	12-MAY-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
UNDOTBS1_FNO-8_8g1tkrj7						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 2, PDB Name: PDB\$SEED						
364	9	A	05-JUN-23	8318717	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSTEM_FNO-9_8a1tkrhr						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
376	10	A	05-JUN-23	8318714	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-						
SYSAUX_FNO-10_861tkrgo						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
377	11	A	05-JUN-23	8318720	01-JUN-23	NO

```

Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-11_841tkrf2
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

375      12      A 05-JUN-23      8318719      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
12_8i1tkrj9
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

368      13      A 05-JUN-23      8319184      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-13_8b1tkril
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

366      14      A 05-JUN-23      8319175      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-14_871tkrhr
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

370      15      A 05-JUN-23      8319193      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-15_8e1tkril
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

373      16      A 05-JUN-23      8319206      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
16_8j1tkrja
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 4, PDB Name: DB1_PDB2

369      17      A 05-JUN-23      8319188      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSTEM_FNO-17_8c1tkril
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

367      18      A 05-JUN-23      8319180      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
SYSAUX_FNO-18_881tkrhr
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 5, PDB Name: DB1_PDB3

```

371	19	A	05-JUN-23	8319197	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 5, PDB Name: DB1_PDB3						
374	20	A	05-JUN-23	8319210	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 5, PDB Name: DB1_PDB3						
378	21	A	05-JUN-23	8318720	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_7j1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
388	22	A	05-JUN-23	8318714	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_7k1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
384	23	A	05-JUN-23	8318717	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_7l1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
389	24	A	05-JUN-23	8318719	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_7m1tkqk6						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
381	25	A	05-JUN-23	8318720	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_7n1tkqrh						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						
Container ID: 3, PDB Name: DB1_PDB1						
392	26	A	05-JUN-23	8318714	01-JUN-23	NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_7o1tkqrj						
Tag: ORACOPYBKUPONFSXN_LEVEL_0						

Container ID: 3, PDB Name: DB1_PDB1

```
385      27      A 05-JUN-23      8318717      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
27_7p1tkqrq
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

390      28      A 05-JUN-23      8318719      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
28_7q1tkqsl
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

380      29      A 05-JUN-23      8318720      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
29_7r1tkr32
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

391      30      A 05-JUN-23      8318714      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
30_7s1tkr3a
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

382      31      A 05-JUN-23      8318717      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
31_7t1tkr3i
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

387      32      A 05-JUN-23      8318719      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_7ultkr42
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

383      33      A 05-JUN-23      8318719      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_7v1tkra6
Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

379      34      A 05-JUN-23      8318717      01-JUN-23      NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
```

34_801tkram

Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

386 35 A 05-JUN-23 8318714 01-JUN-23 NO
Name: /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_811tkrap

Tag: ORACOPYBKUPONFSXN_LEVEL_0
Container ID: 3, PDB Name: DB1_PDB1

RMAN> switch database to copy;

datafile 1 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb8"
datafile 3 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_831tkrd9"
datafile 4 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_851tkrgf"
datafile 5 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_8d1tkril"
datafile 6 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_891tkrhr"
datafile 7 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_8h1tkrj9"
datafile 8 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7"
datafile 9 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_8a1tkrhr"
datafile 10 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_861tkrgo"
datafile 11 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf2"
datafile 12 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj9"
datafile 13 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkril"
datafile 14 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrhr"
datafile 15 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkril"
datafile 16 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrja"
datafile 17 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkril"
datafile 18 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrhr"

```
datafile 19 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4"  
datafile 20 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb"  
datafile 21 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_7j1tkqk6"  
datafile 22 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_7k1tkqk6"  
datafile 23 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_7l1tkqk6"  
datafile 24 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_7m1tkqk6"  
datafile 25 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_7n1tkqrh"  
datafile 26 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_7o1tkqrj"  
datafile 27 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_7p1tkqrq"  
datafile 28 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_7q1tkqs1"  
datafile 29 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_7r1tkr32"  
datafile 30 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_7s1tkr3a"  
datafile 31 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_7t1tkr3i"  
datafile 32 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-32_7u1tkr42"  
datafile 33 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-33_7v1tkra6"  
datafile 34 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-34_801tkram"  
datafile 35 switched to datafile copy "/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_811tkrap"
```

```
RMAN> run {  
2> set until sequence 204;  
3> recover database;  
4> }
```

executing command: SET until clause

Starting recover at 07-JUN-23
using channel ORA_DISK_1

starting media recovery

archived log for thread 1 with sequence 190 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_190_17vwvvt9_.arc
archived log for thread 1 with sequence 191 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_191_17vx6vmg_.arc
archived log for thread 1 with sequence 192 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_192_17vxctms_.arc
archived log for thread 1 with sequence 193 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_193_17vxjjps_.arc
archived log for thread 1 with sequence 194 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_194_17vxnxrh_.arc
archived log for thread 1 with sequence 195 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_195_17vxswv5_.arc
archived log for thread 1 with sequence 196 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_196_17vxlwp_.arc
archived log for thread 1 with sequence 197 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_197_17vy3cyw_.arc
archived log for thread 1 with sequence 198 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_198_17vy8245_.arc
archived log for thread 1 with sequence 199 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_199_17vydv4c_.arc
archived log for thread 1 with sequence 200 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_200_17vykf23_.arc
archived log for thread 1 with sequence 201 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_201_17vyp1dh_.arc
archived log for thread 1 with sequence 202 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_202_17vyvrm5_.arc
archived log for thread 1 with sequence 203 is already on disk as
file
/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_203_17vzdfwm_.arc
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_190_17vwvvt9
_.arc thread=1 sequence=190
archived log file

```
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_191_17vx6vmg
_.arc thread=1 sequence=191
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_192_17vxctms
_.arc thread=1 sequence=192
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_193_17vxjjps
_.arc thread=1 sequence=193
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_194_17vxnxrh
_.arc thread=1 sequence=194
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_195_17vxswv5
_.arc thread=1 sequence=195
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_196_17vxyllwp
_.arc thread=1 sequence=196
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_197_17vy3cyw
_.arc thread=1 sequence=197
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_198_17vy8245
_.arc thread=1 sequence=198
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_199_17vydv4c
_.arc thread=1 sequence=199
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_200_17vykf23
_.arc thread=1 sequence=200
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_201_17vyp1dh
_.arc thread=1 sequence=201
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_202_17vyvrm5
_.arc thread=1 sequence=202
archived log file
name=/nfsfsxn/archlog/DB1/archivelog/2023_06_05/o1_mf_1_203_17vzdfwm
_.arc thread=1 sequence=203
media recovery complete, elapsed time: 00:19:30
Finished recover at 07-JUN-23

RMAN> exit

Recovery Manager complete.
[oracle@ip-172-30-15-124 dbs]$ sqlplus / as sysdba
```

SQL*Plus: Release 19.0.0.0.0 - Production on Wed Jun 7 15:58:12 2023
Version 19.18.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 -
Production
Version 19.18.0.0.0

SQL> select member from v\$logfile;

MEMBER

+DATA/DB1/ONLINELOG/group_3.264.1136666437
+DATA/DB1/ONLINELOG/group_2.263.1136666437
+DATA/DB1/ONLINELOG/group_1.262.1136666437

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_1.262.1136666437' to
'/nfsfsxn/oracopy/redo01.log';

Database altered.

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_2.263.1136666437' to
'/nfsfsxn/oracopy/redo02.log';

Database altered.

SQL> alter database rename file
'+DATA/DB1/ONLINELOG/group_3.264.1136666437' to
'/nfsfsxn/oracopy/redo03.log';

Database altered.

SQL> alter database noarchivelog;

Database altered.

SQL> alter database open resetlogs;

Database altered.

SQL> set lin 200;

```
SQL> select name from v$datafile
2 union
3 select name from v$controlfile
4 union
5 select name from v$tempfile
6 union
7 select member from v$logfile;
```

NAME

```
-----
-----
/nfsfsxn/oracopy/DB1/FB864A929AEB79B9E053630F1EAC7046/datafile/o1_mf
_temp_l81bhz6g_.tmp
/nfsfsxn/oracopy/DB1/FB867DA8C68C816EE053630F1EAC2BCF/datafile/o1_mf
_temp_l81bj16t_.tmp
/nfsfsxn/oracopy/DB1/FB867EA89ECF81C0E053630F1EACB901/datafile/o1_mf
_temp_l81bj135_.tmp
/nfsfsxn/oracopy/DB1/FB867F8A4D4F821CE053630F1EAC69CC/datafile/o1_mf
_temp_l81bj13g_.tmp
/nfsfsxn/oracopy/DB1/datafile/o1_mf_temp_l81bhwjg_.tmp
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-21_7jltkqk6
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-22_7kltkqk6
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-23_7lltkqk6
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-24_7mltkqk6
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-25_7nltkqrh
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-26_7oltkqrj
```

NAME

```
-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-27_7pltkqrq
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-28_7qltkqs1
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-29_7rltkr32
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-30_7sltkr3a
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-31_7tltkr3i
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-32_7ultkr42
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-33_7vltkra6
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-34_80ltkram
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-35_81ltkrap
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_86ltkrgo
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_87ltkhr
```

NAME

```
-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_88ltkhr
```

```

/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_831tkrd9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_891tkrhr
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb8
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_8d1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_8a1tkrhr
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf2
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkril
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-19_8f1tkrj4

```

NAME

```

-----
-----
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_851tkrgf
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj7
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj9
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrja
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-20_8k1tkrjb
/nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_8h1tkrj9
/nfsfsxn/oracopy/db1.ctl
/nfsfsxn/oracopy/redo01.log
/nfsfsxn/oracopy/redo02.log
/nfsfsxn/oracopy/redo03.log

```

43 rows selected.

SQL> show pdbs;

CON_ID	CON_NAME	OPEN MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO
3	DB1_PDB1	READ WRITE	NO
4	DB1_PDB2	READ WRITE	NO
5	DB1_PDB3	READ WRITE	NO

SQL> alter session set container=db1_pdb1;

Session altered.

SQL> select * from test;

ID DT

EVENT

```

-----
1 18-MAY-23 02.35.37.000000 PM
test oracle incremental merge switch to copy
2 30-MAY-23 05.23.11.000000 PM
test recovery on a new EC2 instance host with image copy on FSx
ONTAP
3 05-JUN-23 03.19.46.000000 PM
test clone on a new EC2 instance host with image copy on FSx ONTAP

SQL>

```

9. Rinominare l'istanza del database clonata e modificare l'ID del database con l'utilità Oracle nid. Lo stato dell'istanza del database deve essere in mount per eseguire il comando.

```

SQL> select name, open_mode, log_mode from v$database;

NAME          OPEN_MODE          LOG_MODE
-----
DB1           READ WRITE        NOARCHIVELOG

SQL> shutdown immediate;
Database closed.
Database dismounted.
ORACLE instance shut down.

SQL> startup mount;
ORACLE instance started.

Total System Global Area 1.0737E+10 bytes
Fixed Size                 9174800 bytes
Variable Size             1577058304 bytes
Database Buffers          9126805504 bytes
Redo Buffers              24379392 bytes
Database mounted.
SQL> exit
Disconnected from Oracle Database 19c Enterprise Edition Release
19.0.0.0.0 - Production
Version 19.18.0.0.0
[oracle@ip-172-30-15-124 dbs]$ nid target=/ dbname=db1tst

DBNEWID: Release 19.0.0.0.0 - Production on Wed Jun 7 16:15:14 2023

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights
reserved.

Connected to database DB1 (DBID=1730530050)

```

Connected to server version 19.18.0

Control Files in database:

/nfsfsxn/oracopy/db1.ctl

Change database ID and database name DB1 to DB1TST? (Y/[N]) => Y

Proceeding with operation

Changing database ID from 1730530050 to 3054879890

Changing database name from DB1 to DB1TST

Control File /nfsfsxn/oracopy/db1.ctl - modified

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-1_821tkrb - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-3_831tkrd - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-4_851tkrg - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-5_8d1tkri - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-6_891tkrh - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-7_8h1tkrj - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-8_8g1tkrj - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-9_8a1tkrh - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-10_861tkrg - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-11_841tkrf - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-12_8i1tkrj - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-13_8b1tkri - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-14_871tkrh - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-UNDOTBS1_FNO-15_8e1tkri - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-16_8j1tkrj - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSTEM_FNO-17_8c1tkri - dbid changed, wrote new name

Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SYSAUX_FNO-18_881tkrh - dbid changed, wrote new name

```
Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-
UNDOTBS1_FNO-19_8f1tkrj - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-USERS_FNO-
20_8k1tkrj - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
21_7j1tkqk - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
22_7k1tkqk - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
23_7l1tkqk - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
24_7m1tkqk - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
25_7n1tkqr - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
26_7o1tkqr - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
27_7p1tkqr - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
28_7q1tkqs - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
29_7r1tkr3 - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
30_7s1tkr3 - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
31_7t1tkr3 - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
32_7u1tkr4 - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
33_7v1tkra - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
34_801tkra - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/data_D-DB1_I-1730530050_TS-SOE_FNO-
35_811tkra - dbid changed, wrote new name
  Datafile /nfsfsxn/oracopy/DB1/datafile/o1_mf_temp_l81bhwjg_.tm -
dbid changed, wrote new name
  Datafile
/nfsfsxn/oracopy/DB1/FB864A929AEB79B9E053630F1EAC7046/datafile/o1_mf
_temp_l81bhzh6g_.tm - dbid changed, wrote new name
  Datafile
/nfsfsxn/oracopy/DB1/FB867DA8C68C816EE053630F1EAC2BCF/datafile/o1_mf
_temp_l81bj16t_.tm - dbid changed, wrote new name
  Datafile
/nfsfsxn/oracopy/DB1/FB867EA89ECF81C0E053630F1EACB901/datafile/o1_mf
_temp_l81bj135_.tm - dbid changed, wrote new name
  Datafile
```

```
/nfsfsxn/oracopy/DB1/FB867F8A4D4F821CE053630F1EAC69CC/datafile/ol_mf
_temp_181bj13g_.tm - dbid changed, wrote new name
  Control File /nfsfsxn/oracopy/db1.ctl - dbid changed, wrote new
name
  Instance shut down
```

Database name changed to DB1TST.

Modify parameter file and generate a new password file before restarting.

Database ID for database DB1TST changed to 3054879890.

All previous backups and archived redo logs for this database are unusable.

Database is not aware of previous backups and archived logs in Recovery Area.

Database has been shutdown, open database with RESETLOGS option.

Successfully changed database name and ID.

DBNEWID - Completed successfully.

10. Modificare la configurazione dell'ambiente del database Oracle con un nuovo nome di database o ID istanza in oratab, file init e creare le directory di amministrazione necessarie che corrispondano al nuovo ID istanza. Quindi, avviare l'istanza con l'opzione resetlogs.

```
SQL> startup mount;
ORACLE instance started.
```

```
Total System Global Area 1.0737E+10 bytes
Fixed Size                  9174800 bytes
Variable Size               1577058304 bytes
Database Buffers           9126805504 bytes
Redo Buffers                24379392 bytes
Database mounted.
```

```
SQL> alter database open resetlogs;
```

```
Database altered.
```

```
SQL> select name, open_mode, log_mode from v$database;
```

NAME	OPEN_MODE	LOG_MODE
DB1TST	READ WRITE	NOARCHIVELOG

```
SQL> show pdbs
```

CON_ID	CON_NAME	OPEN MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO
3	DB1_PDB1	MOUNTED	
4	DB1_PDB2	MOUNTED	
5	DB1_PDB3	MOUNTED	

```
SQL> alter pluggable database all open;
```

```
Pluggable database altered.
```

```
SQL> show pdbs
```

CON_ID	CON_NAME	OPEN MODE	RESTRICTED
2	PDB\$SEED	READ ONLY	NO
3	DB1_PDB1	READ WRITE	NO
4	DB1_PDB2	READ WRITE	NO
5	DB1_PDB3	READ WRITE	NO

```
SQL>
```

In questo modo si completa la clonazione di una nuova istanza Oracle dalla copia del database di staging sul mount NFS FSx per DEV, UAT o qualsiasi altro caso d'uso. È possibile clonare più istanze di Oracle dalla stessa copia dell'immagine di staging.



Se riscontri un errore RMAN-06571: datafile 1 does not have recoverable copy quando si cambia il database da copiare, controllare l'incarnazione del database che corrisponde al DB di produzione primario. Se necessario, reimpostare l'incarnazione in modo che corrisponda al primario con il comando RMAN `reset database to incarnation n;`.

Dove trovare ulteriori informazioni

Per saperne di più sulle informazioni descritte nel presente documento, consultare i seguenti documenti e/o siti web:

- RMAN: Strategie di backup incrementale unite (ID documento 745798.1)

["https://support.oracle.com/knowledge/Oracle%20Database%20Products/745798_1.html"](https://support.oracle.com/knowledge/Oracle%20Database%20Products/745798_1.html)

- Guida utente per il backup e il ripristino di RMAN

["https://docs.oracle.com/en/database/oracle/oracle-database/19/bradv/getting-started-rman.html"](https://docs.oracle.com/en/database/oracle/oracle-database/19/bradv/getting-started-rman.html)

- Amazon FSx ONTAP

["https://aws.amazon.com/fsx/netapp-ontap/"](https://aws.amazon.com/fsx/netapp-ontap/)

- Amazon EC2

https://aws.amazon.com/pm/ec2/?trk=36c6da98-7b20-48fa-8225-4784bced9843&sc_channel=ps&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2&ef_id=Cj0KCQiA54KfBhCKARIsAJzSrdqwQrghn6I71jiWzSeaT9Uh1-vY-VfhJixF-xnv5rWwn2S7RqZOTQ0aAh7eEALw_wcB:G:s&s_kwcid=AL!4422!3!467723097970!e!!g!!aws%20ec2

Informazioni sul copyright

Copyright © 2026 NetApp, Inc. Tutti i diritti riservati. Stampato negli Stati Uniti d'America. Nessuna porzione di questo documento soggetta a copyright può essere riprodotta in qualsiasi formato o mezzo (grafico, elettronico o meccanico, inclusi fotocopie, registrazione, nastri o storage in un sistema elettronico) senza previo consenso scritto da parte del detentore del copyright.

Il software derivato dal materiale sottoposto a copyright di NetApp è soggetto alla seguente licenza e dichiarazione di non responsabilità:

IL PRESENTE SOFTWARE VIENE FORNITO DA NETAPP "COSÌ COM'È" E SENZA QUALSIVOGLIA TIPO DI GARANZIA IMPLICITA O ESPRESSA FRA CUI, A TITOLO ESEMPLIFICATIVO E NON ESAUSTIVO, GARANZIE IMPLICITE DI COMMERCIALIZZABILITÀ E IDONEITÀ PER UNO SCOPO SPECIFICO, CHE VENGONO DECLINATE DAL PRESENTE DOCUMENTO. NETAPP NON VERRÀ CONSIDERATA RESPONSABILE IN ALCUN CASO PER QUALSIVOGLIA DANNO DIRETTO, INDIRETTO, ACCIDENTALE, SPECIALE, ESEMPLARE E CONSEGUENZIALE (COMPRESI, A TITOLO ESEMPLIFICATIVO E NON ESAUSTIVO, PROCUREMENT O SOSTITUZIONE DI MERCI O SERVIZI, IMPOSSIBILITÀ DI UTILIZZO O PERDITA DI DATI O PROFITTI OPPURE INTERRUZIONE DELL'ATTIVITÀ AZIENDALE) CAUSATO IN QUALSIVOGLIA MODO O IN RELAZIONE A QUALUNQUE TEORIA DI RESPONSABILITÀ, SIA ESSA CONTRATTUALE, RIGOROSA O DOVUTA A INSOLVENZA (COMPRESA LA NEGLIGENZA O ALTRO) INSORTA IN QUALSIASI MODO ATTRAVERSO L'UTILIZZO DEL PRESENTE SOFTWARE ANCHE IN PRESENZA DI UN PREAVVISO CIRCA L'EVENTUALITÀ DI QUESTO TIPO DI DANNI.

NetApp si riserva il diritto di modificare in qualsiasi momento qualunque prodotto descritto nel presente documento senza fornire alcun preavviso. NetApp non si assume alcuna responsabilità circa l'utilizzo dei prodotti o materiali descritti nel presente documento, con l'eccezione di quanto concordato espressamente e per iscritto da NetApp. L'utilizzo o l'acquisto del presente prodotto non comporta il rilascio di una licenza nell'ambito di un qualche diritto di brevetto, marchio commerciale o altro diritto di proprietà intellettuale di NetApp.

Il prodotto descritto in questa guida può essere protetto da uno o più brevetti degli Stati Uniti, esteri o in attesa di approvazione.

LEGENDA PER I DIRITTI SOTTOPOSTI A LIMITAZIONE: l'utilizzo, la duplicazione o la divulgazione da parte degli enti governativi sono soggetti alle limitazioni indicate nel sottoparagrafo (b)(3) della clausola Rights in Technical Data and Computer Software del DFARS 252.227-7013 (FEB 2014) e FAR 52.227-19 (DIC 2007).

I dati contenuti nel presente documento riguardano un articolo commerciale (secondo la definizione data in FAR 2.101) e sono di proprietà di NetApp, Inc. Tutti i dati tecnici e il software NetApp forniti secondo i termini del presente Contratto sono articoli aventi natura commerciale, sviluppati con finanziamenti esclusivamente privati. Il governo statunitense ha una licenza irrevocabile limitata, non esclusiva, non trasferibile, non cedibile, mondiale, per l'utilizzo dei Dati esclusivamente in connessione con e a supporto di un contratto governativo statunitense in base al quale i Dati sono distribuiti. Con la sola esclusione di quanto indicato nel presente documento, i Dati non possono essere utilizzati, divulgati, riprodotti, modificati, visualizzati o mostrati senza la previa approvazione scritta di NetApp, Inc. I diritti di licenza del governo degli Stati Uniti per il Dipartimento della Difesa sono limitati ai diritti identificati nella clausola DFARS 252.227-7015(b) (FEB 2014).

Informazioni sul marchio commerciale

NETAPP, il logo NETAPP e i marchi elencati alla pagina <http://www.netapp.com/TM> sono marchi di NetApp, Inc. Gli altri nomi di aziende e prodotti potrebbero essere marchi dei rispettivi proprietari.