



Manage Kubernetes clusters

Kubernetes clusters

NetApp

February 11, 2024

Table of Contents

- Manage Kubernetes clusters 1
 - Manage Astra Trident 1
 - Manage storage classes 3
 - View persistent volumes 6
 - Remove Kubernetes clusters from the workspace 7
 - Use NetApp cloud data services with Kubernetes clusters 8


Manage Kubernetes clusters

Manage Astra Trident

After you add a managed Kubernetes cluster to the Canvas, you can use BlueXP to confirm a compatible Astra Trident installation, install or upgrade Astra Trident to the latest version, or uninstall Astra Trident.

Astra Trident in BlueXP

After adding Kubernetes clusters to BlueXP, you can manage Astra Trident and your Kubernetes clusters from the overview page. To open the overview page, double-click the Kubernetes working environment on the Canvas.

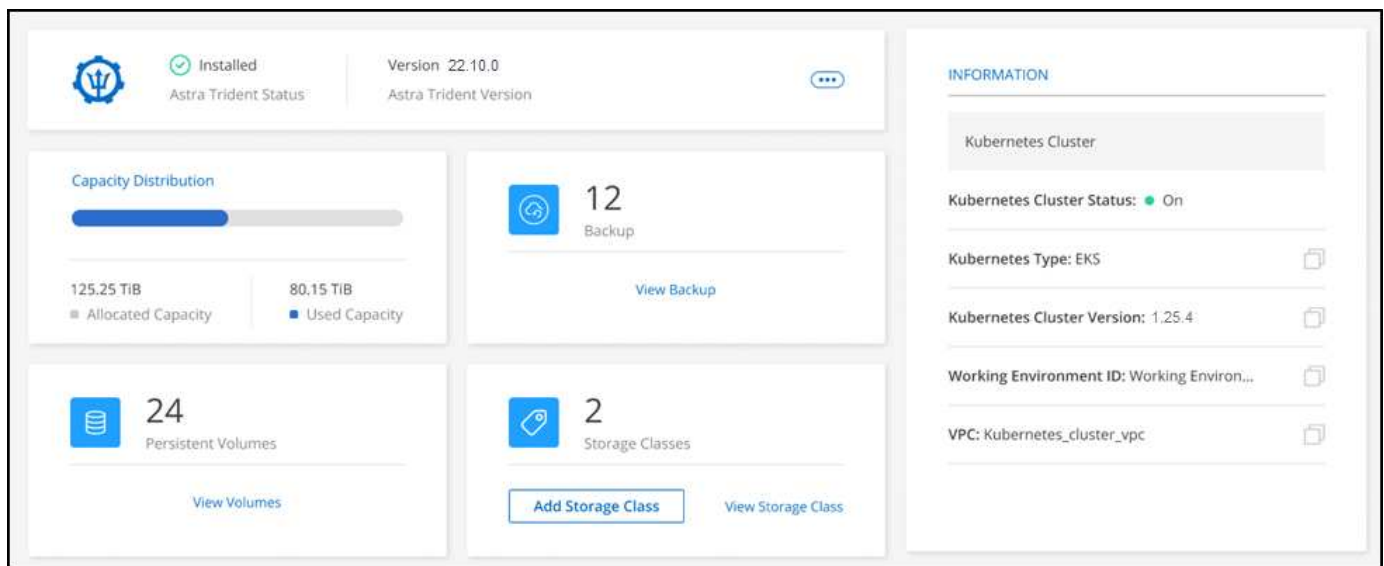

Supported Astra Trident versions

One of the four most recent versions of Astra Trident deployed using the Trident operator—either manually or using Helm chart—is required. If Astra Trident is not installed, or an incompatible version of Astra Trident is installed, the cluster will show there is an action required.



Astra Trident deployed using `tridentctl` is not supported. If you deployed Astra Trident using `tridentctl`, you cannot use BlueXP to manage your Kubernetes clusters or uninstall Astra Trident. You must [uninstall using `tridentctl`](#) and reinstall Astra Trident either manually using [the Trident operator](#) or in BlueXP using [Install or upgrade Astra Trident](#).

To learn more about Astra Trident, see [Astra Trident documentation](#).

Install or upgrade Astra Trident

You can review your Astra Trident installation status and version on the overview page. If Astra Trident is not already installed, or an incompatible version is installed, you can manage that using BlueXP.

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
 - a. If Astra Trident is not installed, click **Install Trident**.

1 | Install Astra Trident

Astra Trident enables management of storage resources across all popular NetApp storage platforms.

Install Trident

- b. If an unsupported version of Astra Trident is installed, click **Upgrade Trident**.

Upgrade Astra Trident

Astra Trident enables management of storage resources across all popular NetApp storage platforms.

Upgrade Trident



You cannot use BlueXP to upgrade from Astra Trident versions earlier than 21.01. To upgrade from an earlier version, refer to [Upgrade with the operator](#).

Results

The latest version of Astra Trident is installed. You can now add storage classes.

Uninstall Astra Trident

If you installed Astra Trident using BlueXP or using the Trident operator (either Helm or manually), you can uninstall it using BlueXP.



- After uninstalling Astra Trident you cannot create new persistent volumes, but existing volumes are still available.
- While Astra Trident is uninstalled, backup is unavailable.
- You can reinstall Astra Trident to the working environment at any time to continue managing clusters.

Uninstalling Astra Trident using BlueXP does not remove all Astra Trident services applied during installation. To completely remove Astra Trident, including all custom resource definitions (CRDs) it creates, refer to [uninstall using the Trident operator](#)

Steps

1. From the overview page, select the ellipses and **Uninstall Astra Trident**.



2. Select **Uninstall** to confirm and uninstall Astra Trident.

Results

Astra Trident is now uninstalled from the working environment. You can reinstall Astra Trident at any time.

Manage storage classes

After you add a managed Kubernetes cluster to the Canvas, you can use BlueXP to manage storage classes.



If no storage class is defined, the cluster will show there is an action required. Double-clicking the cluster on the Canvas opens the action page to add a storage class.

Add storage class

Steps

1. From the Canvas, drag and drop the Kubernetes working environment on to the Cloud Volumes ONTAP or Amazon FSx for ONTAP working environment to open the storage class wizard.
2. Provide a name for the storage class.
3. Select **Filesystem** or **Block** storage.
 - a. For **Block** storage, select a File System Type (fstype)

- b. For **Block** or **Filesystem** storage, you can select to enable storage class economy.

Storage Class
☒ Filesystem
☐ Block

Storage Class Economy ⓘ
☒ Enable Economy for Storage Class

Support Volume Expansion
☒ Yes
☐ No

Volume Binding Mode
☒ Immediate
☐ WaitForFirstConsumer

Set as Default Storage Class
☒ Yes
☐ No

ⓘ Backup and restore are not supported when using storage class economy.

4. Select options for volume expansion, volume binding, and default storage class. Click **Next**.
5. Select a working environment to connect to the cluster. Click **Add**.

☒ Storage Class Definitions
☒ Select Working Environment


Select Working Environment

Working Environment	Type	Configuration	Region	Connected to K8s Clusters
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	High Availability	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	High Availability	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	High Availability	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	Single Node	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	Single Node	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	High Availability	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	Single Node	US East (Northern Virginia)	Not Connected
<input type="radio"/> Working Environment Name ● On	Cloud Volumes ONTAP	Single Node	US East (Northern Virginia)	Not Connected

Previous
Add

Results

You can click to view the storage class from the resource page for the Kubernetes cluster.

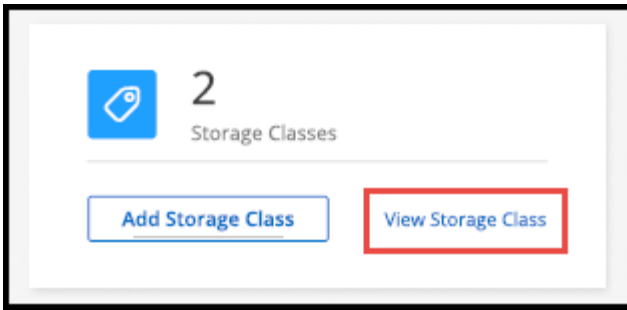


View working environment details

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the information icon to view details for the working environment.

Results

The working environment details panel opens.

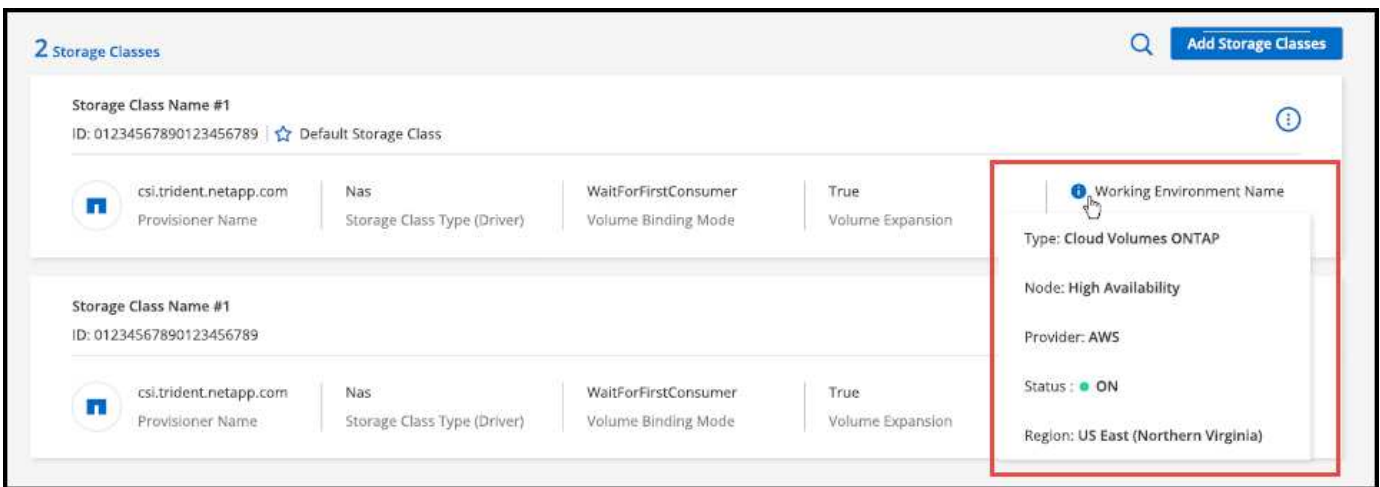

Set default storage class

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the action menu for the storage class and click **Set as Default**.



Results

The selected storage class is set as the default.

Storage Class Name #2

ID: 01234567890123456789 ☆ Default Storage Class

csi.trident.netapp.com

Provisioner Name

Nas

Storage Class Type (Driver)

WaitForFirstConsumer

Volume Binding Mode

True

Volume Expansion

Working Environment Name

Attached Working Environment


Remove storage class

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the action menu for the storage class and click **Set as Default**.



4. Click **Remove** to confirm removal of the storage class.

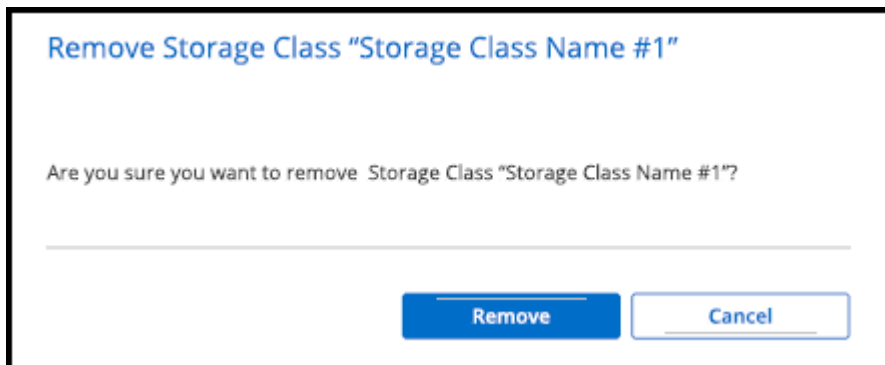

Results

The selected storage class is removed.

View persistent volumes

After you add a managed Kubernetes cluster to the Canvas, you can use BlueXP to view persistent volumes.



BlueXP monitors the Kubernetes cluster for changes to the backend and updates the persistent volume table when new volumes are added. If automatic backup was configured on the cluster, backup is automatically enabled on the new persistent volumes.

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click **View Volumes** from the **Overview** tab or click the **Persistent Volumes** tab. If no persistent volumes are configured, see [Provisioning](#) for details on provisioning volumes in Astra Trident.

Results

A table of the configured persistent volumes displays.

Volumes Summary

8

Total Volumes

400

GiB

Total Allocated Capacity

201.2

GiB

Total Used Capacity

8 Volumes


Volume Name	Name Space	Storage Class	Access Mode	Allocated Capacity	Used Capacity
<div>Volumes Very Long Name</div> <div>● On</div>	Name Space	Storage Class Name	Access Mode	50 GiB	25.15 GiB
<div>Volumes Very Long Name</div> <div>● On</div>	Name Space	Storage Class Name	Access Mode	50 GiB	25.15 GiB

Remove Kubernetes clusters from the workspace


After you add a managed Kubernetes cluster to the Canvas, you can use BlueXP to remove clusters from the workspace.

Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. At the top right of the page, select the actions menu and click **Remove from Workspace**.

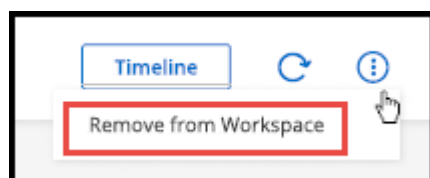

3. Click **Remove** to confirm removal of the cluster from the workspace. You can rediscover this cluster at any time.

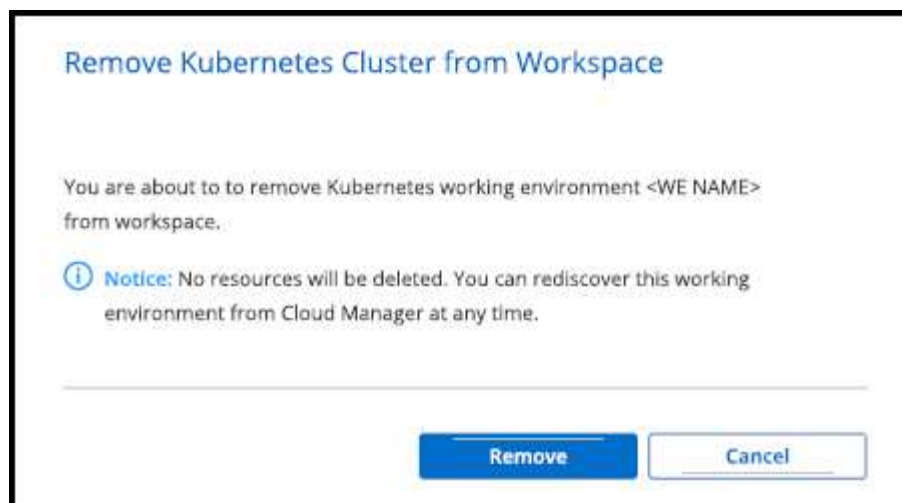

Results

The Kubernetes cluster is removed from the workspace and is no longer visible on the Canvas.

Use NetApp cloud data services with Kubernetes clusters

After you add a managed Kubernetes cluster to the Canvas, you can use NetApp cloud data services for advanced data management.

You can use BlueXP backup and recovery to back up persistent volumes to object storage.

[Learn how to protect your Kubernetes cluster data using BlueXP backup and recovery.](#)

Restore
Kubernetes

1 Selected Kubernetes Clusters
Backup Settings

1
Kubernetes Clusters

5
Protected PVs

97.66 KB
Total Backups Size

Protected Persistent Volumes Status

5
Healthy Backup

0
Failed Backup

5 Backup Jobs

Source K8s Cluster	Source Persistent Volume	Source Namespace	Last Backup	Backup Copies	Backup Status	
On	pvc-1704aa1f-af1d-49e9-87fd-6edd86125855 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
On	pvc-d1f839c1-d932-4f49-b620-33321dbe939e Online	trident	Nov 25 2021, 14:56:3	2	Enabled	...
On	pvc-f615f0a8-2d5d-44d0-b4e4-f365cc3fb4a6 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
On	pvc-1615f0a8-2d5d-44d0-b4e4-f365cc3fb4a6 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
On	pvc-05881c70-cf5f-4edc-8537-a0a5ce36f9a1 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.