



# Forensics

## Cloud Insights

NetApp  
April 20, 2021

# Table of Contents

- Forensics ..... 1
- Forensics - All Activity ..... 1
- Forensic Entities Page ..... 4
- Forensic User Overview ..... 6

# Forensics

## Forensics - All Activity

The All Activity page helps you understand the actions performed on entities in the Cloud Secure environment.

### Examining All Activity Data


Click **Forensics > Activity Forensics** and click the **All Activity** tab to access the All Activity page.

This page provides an overview of activities in your environment, highlighting the following information:

- A graph showing *Activity History* (accessed per minute/per 5 minutes/per 10 minutes based on selected global time range)

You can zoom the graph by dragging out a rectangle in the graph. The entire page will be loaded to display the zoomed time range. When zoomed in, a button is displayed that lets the user zoom out.

- A chart of *Activity Types*. To obtain activity history data by activity type, click on corresponding x-axis label link.
- A chart of Activity on *Entity Types*. To obtain activity history data by entity type, click on corresponding x-axis label link.
- A list of the *All Activity* data

The *\*All Activity\** table shows the following information. Note that not all of these columns are displayed by default. You can select columns to display by clicking on the "gear" icon  .

- The **time** an entity was accessed including the year, month, day, and time of the last access.
- The **user** that accessed the entity with a link to the [User information](#).
- The **activity** the user performed. Supported types are:
  - **Change Group Ownership** - Group Ownership is of file or folder is changed. For more details about group ownership please see [this link](#).
  - **Change Owner** - Ownership of file or folder is changed to another user.
  - **Change Permission** - File or folder permission is changed.
  - **Create** - Create file or folder.
  - **Delete** - Delete file or folder. If a folder is deleted, *delete* events are obtained for all the files in that folder and subfolders.
  - **Read** - File is read.
  - **Read Metadata** - Only on enabling folder monitoring option. Will be generated on opening a folder on Windows or Running "ls" inside a folder in Linux.
  - **Rename** - Rename file or folder.
  - **Write** - Data is written to a file.
  - **Write Metadata** - File metadata is written, for example, permission changed.
  - **Other Change** - Any other event which are not described above. All unmapped events are mapped to

“Other Change” activity type. Applicable to files and folders.


- The **Path** to the entity with a link to the [Entity Detail Data](#)
- The **Entity Type**, including entity (i.e. file) extension (.doc, .docx, .tmp, etc.)
- The **Device** where the entities reside
- The **Protocol** used to fetch events.
- The **Original Path** used for rename events when the original file was renamed. This column is not visible in the table by default. Use the column selector to add this column to the table.
- The **Volume** where the entities reside. This column is not visible in the table by default. Use the column selector to add this column to the table.

## Filtering Forensic Activity History Data

There are two methods you can use to filter data.

1. Hover over the field in the table and click the filter icon that appears. The value is added to the appropriate filters in the top *Filter By* list.
2. Filter data by typing in the *Filter By* field:

Select the appropriate filter from the top ‘Filter By’ widget by clicking the **[+]** button:

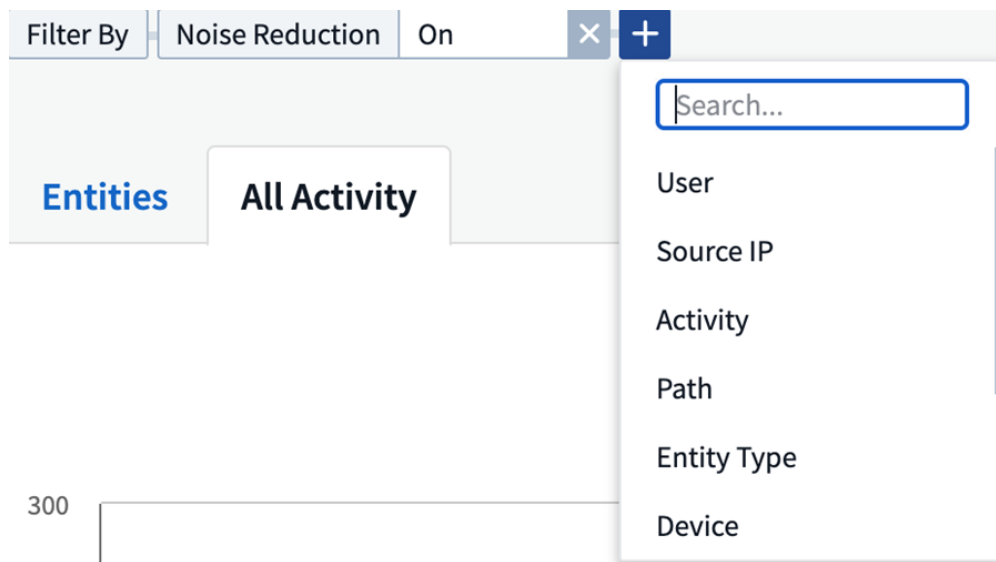

Enter the search text

Press Enter or click outside of the filter box to apply the filter.

You can filter Forensic Activity data by the following fields:

- The **Activity** type.
- **Source IP** from which the entity was accessed. You must provide a valid source IP address in double quotes, for example “10.1.1.1.”. Incomplete IPs such as “10.1.1.”, “**10.1..\***”, etc. will not work.
- **Protocol** to fetch protocol-specific activities.
- **Noise Reduction** to filter activities on temporary files which are generated as part of the normal operating process. If noise reduction is enabled, temporary files of extension .tmp, .ldb, .lacddb, .\$db etc. are filtered.

- **Username** of the user performing the activity. You need to provide the exact Username to filter. Search with partial username, or partial username prefixed or suffixed with '\*' will not work.

The following fields are subject to special filtering rules:

- **Entity Type**, using entity (file) extension
- **Path** of the entity
- **User** performing the activity
- **Device** (SVM) where entities reside
- **Volume** where entities reside
- The **Original Path** used for rename events when the original file was renamed.

The preceding fields are subject to the following when filtering:

- Exact value should be within quotes: Example: "searchtext"
- Wildcard strings must contain no quotes: Example: searchtext, \*searchtext\*, will filter for any strings containing 'searchtext'.
- String with a prefix, Example: searchtext\* , will search any strings which start with 'searchtext'.

## Sorting Forensic Activity History Data

You can sort activity history data by *Time*, *User*, *Source IP*, *Activity*, *Path* and *Entity Type*. By default, the table is sorted by descending *Time* order, meaning the latest data will be displayed first. Sorting is disabled for *Device* and *Protocol* fields.

## Exporting All Activity

You can export the activity history to a .CSV file by clicking the *Export* button above the Activity History table. Note that only the top 10,000 records are exported.

## Column Selection for All Activity

The *All activity* table shows select columns by default. To add, remove, or change the columns, click the gear icon on the right of the table and select from the list of available columns.



## Activity History Retention

Activity history is retained for 13 months for active Cloud Secure environments.

## Troubleshooting

Problem	Try This
---------	----------

In the “All Activities” table, under the ‘User’ column, the user name is shown as:  
“ldap:HQ.COMPANYNAME.COM:S-1-5-21-3577637-1906459482-1437260136-1831817”  
or  
“ldap:default:80038003”

Possible reasons could be:

1. No User Directory Collectors have been configured yet. To add one, go to **Admin > Data Collectors > User Directory Collectors** and click on **+User Directory Collector**. Choose *Active Directory* or *LDAP Directory Server*.
2. A User Directory Collector has been configured, however it has stopped or is in error state. Please go to **Admin > Data Collectors > User Directory Collectors** and check the status. Refer to the [User Directory Collector troubleshooting](#) section of the documentation for troubleshooting tips. After configuring properly, the name will get automatically resolved within 24 hours. If it still does not get resolved, check if you have added the correct User Data Collector. Make sure that the user is indeed part of the added Active Directory/LDAP Directory Server.

## Forensic Entities Page

The Forensics Entities page provides detailed information about entity activity in your environment.

### Examining Entity Information


Click **Forensics > Activity Forensics** and click the *Entities* tab to access the Entities page.

This page provides an overview of entity activity in your environment, highlighting the following information:


- \* A graph showing *Unique Entities* accessed per minute
- \* A chart of *Entity Types Accessed*
- \* A breakdown of the *Common Paths*
- \* A list of the *Top 50 Entities* out of the total number of entities

Unique Entities

Entities per minute

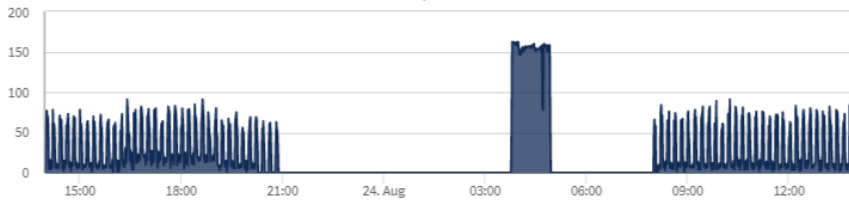

Entity Types Accessed

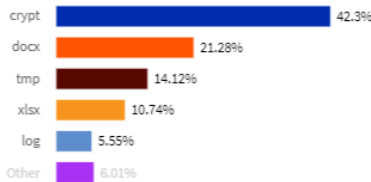

Common Paths

Path	Percentage
...oGroupShares2/eng_cifs_volume/	100%
hr/	21.02%
development/	20.96%
financial/	18.93%
sales/	14.63%
productmanagement/	12.58%
merger/	11.88%

Preview Top 50 Entities of 12386

Name	Entity Type	Device	Path	Activities ↓
Tech Tower.pptx	pptx	demoGroupShares2	/ENG_CIFS_volume/Sales/Tech Tower.pptx	39
Kevin_Obrien.xlsx	xlsx	demoGroupShares2	/ENG_CIFS_volume/Sales/Kevin_Obrien.xlsx	37
Harrison_Ware.docx	docx	demoGroupShares2	/ENG_CIFS_volume/Sales/Harrison_Ware.docx	35
Matter Shop Lifters.pptx	pptx	demoGroupShares2	/ENG_CIFS_volume/Sales/Matter Shop Lifters.pptx	35

Clicking on an entity in the list opens an overview page for the entity, showing a profile of the entity with details like name, type, device name, most accessed location IP, and path, as well as the entity behavior such as the user, IP, and time the entity was last accessed.



Entity Overview

Entity Profile

Name Kevin_Obrien.xlsx	Most Accessed Location 10.197.144.115	Size 91 KB
Type xlsx	Device Name demoGroupShares2	Path /ENG_CIFS_volume/Sales/Kevin_Obrien.xlsx

Entity Behaviour

Recent Activity	Operations (last 7 days)
Last accessed : 12 minutes ago Aug 24, 2020 2:02 PM	Read :89
Last accessed by: Tyrique Ray	Read Metadata :22
Last accessed from : 10.197.144.115	Other Activities :43

# Forensic User Overview

Information for each user is provided in the User Overview. Use these views to understand user characteristics, associated entities, and recent activities.

## User Profile

User Profile information includes contact information and location of the user. The profile provides the following information:

- Name of the user
- Email address of the user
- User's Manager
- Phone contact for the user
- Location of the user

## User Behavior

The user behavior information identifies recent activities and operations performed by the user. This information includes:

- Recent activity
  - Last access location
  - Activity graph
  - Alerts
- Operations for the last seven days
  - Number of operations

## Refresh Interval

The User list is refreshed every 12 hours.

## Retention Policy

If not refreshed again, the User list is retained for 13 months. After 13 months, the data will be deleted. If your Cloud Secure environment is deleted, all data associated with the environment is deleted.



## Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

## Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.