



## Concepts

### SnapCenter Plug-in for VMware vSphere

NetApp  
December 09, 2025

This PDF was generated from [https://docs.netapp.com/us-en/sc-plugin-vmware-vsphere-61/scpivs44\\_concepts\\_overview.html](https://docs.netapp.com/us-en/sc-plugin-vmware-vsphere-61/scpivs44_concepts_overview.html) on December 09, 2025. Always check docs.netapp.com for the latest.

# Table of Contents

- Concepts ..... 1
  - Product overview ..... 1
  - Overview of the different SnapCenter GUIs ..... 2
  - Licensing ..... 3
  - Role-Based Access Control (RBAC) ..... 3
    - Types of RBAC for SnapCenter Plug-in for VMware vSphere users ..... 4
      - vCenter Server RBAC ..... 4
      - ONTAP RBAC ..... 4
      - Validation workflow for RBAC privileges ..... 5
    - ONTAP RBAC features in SnapCenter Plug-in for VMware vSphere ..... 5
    - Predefined roles packaged with SnapCenter Plug-in for VMware vSphere ..... 6
    - How to configure ONTAP RBAC for SnapCenter Plug-in for VMware vSphere ..... 7

# Concepts

## Product overview

SnapCenter Plug-in for VMware vSphere is a standalone virtual appliance (Open Virtual Appliance format) that provides data protection services for VMs and datastores, and supports data protection services for SnapCenter application-based plug-ins. This document describes how to deploy and use SnapCenter Plug-in for VMware vSphere and includes quick start information.

SnapCenter Plug-in for VMware vSphere is deployed as a Linux-based virtual appliance.

SnapCenter Plug-in for VMware vSphere adds the following functionality to your environment:

- Support for VM-consistent and crash-consistent data protection operations.

You can use the VMware vSphere client GUI in vCenter for all backup and restore operations of VMware virtual machines (traditional VMs and vVol VMs), VMDKs, and datastores. For vVol VMs (VMs in vVol datastores), only crash-consistent backups are supported. You can also restore VMs and VMDKs and restore files and folders that reside on a guest OS.

When backing up VMs, VMDKs, and datastores, the plug-in does not support RDMs. Backup jobs for VMs ignore RDMs. If you need to back up RDMs, you must use a SnapCenter application-based plug-in.

SnapCenter Plug-in for VMware vSphere includes a MySQL database that contains the SnapCenter Plug-in for VMware vSphere metadata. For VM-consistent and crash-consistent data protection, you do not need to install SnapCenter Server.

- Support for application-consistent (application over VMDK/RDM) data protection operations.

You can use the SnapCenter GUI and the appropriate SnapCenter application plug-ins for all backup and restore operations of databases and filesystems on primary and secondary storage on VMs.

SnapCenter natively leverages the SnapCenter Plug-in for VMware vSphere for all data protection operations on VMDKs, raw device mappings (RDMs), and NFS datastores. After the virtual appliance is deployed, the plug-in handles all interactions with vCenter. SnapCenter Plug-in for VMware vSphere supports all SnapCenter application-based plug-ins.

SnapCenter does not support single snapshots of databases and VMs together. Backups for VMs and databases must be scheduled and run independently, which creates separate snapshots, even if the databases and VMs are hosted in the same volume. Schedule the database application backups using the SnapCenter GUI; schedule the VM and datastore backups using the VMware vSphere client GUI.

- VMware tools is required for VM consistent snapshots

If VMware tools is not installed and running, the file system is not quiesced and a crash-consistent snapshot is created.

- VMware Storage vMotion is required for restore operations in SAN (VMFS) environments

The restore workflow for VMware file system (VMFS) utilizes the VMware Storage vMotion feature. Storage vMotion is a part of the vSphere Standard License but is not available with the vSphere Essentials or Essentials Plus licenses.

Most restore operations in NFS environments use native ONTAP functionality (for example, Single File SnapRestore) and do not require VMware Storage vMotion.

- ONTAP tools for VMware vSphere is required to configure VMware vVol VMs.

You use ONTAP tools to provision and configure storage for vVols in ONTAP and in the VMware web client.

For more information, refer to the ONTAP tools for VMware vSphere documentation. Additionally, refer to [NetApp Interoperability Matrix Tool](#) for latest information about the supported versions on ONTAP tools.

- SnapCenter Plug-in for VMware vSphere is deployed as a virtual appliance in a Linux VM

Although the virtual appliance must be installed as a Linux VM, the SnapCenter Plug-in for VMware vSphere supports both Windows-based and Linux-based vCenters. SnapCenter natively uses this plug-in without user intervention to communicate with your vCenter to support SnapCenter application-based plug-ins that perform data protection operations on Windows and Linux virtualized applications.

In addition to these major features, the SnapCenter Plug-in for VMware vSphere also provides support for iSCSI, Fiber Channel, FCoE, NFS 3.0/4.1, VMFS 5.0/6.0, NVMe over FC, and NVMe over TCP.

For the latest information about supported versions, refer to [NetApp Interoperability Matrix Tool](#) (IMT).

For information about NFS protocols and ESXi host, refer to the vSphere Storage documentation that is provided by VMware.

For information about SnapCenter data protection, refer to data protection information for your SnapCenter plug-in in the [SnapCenter Documentation](#).

For information about supported upgrade and migration paths, refer to [SnapCenter Plug-in for VMware vSphere Release Notes](#).

## Overview of the different SnapCenter GUIs

In your SnapCenter environment, you must use the appropriate GUI to perform data protection and management operations.

SnapCenter Plug-in for VMware vSphere is a standalone plug-in that is different from other SnapCenter plug-ins. You must use the VMware vSphere client GUI in vCenter for all backup and restore operations for VMs, VMDKs, and datastores. You also use the web client GUI Dashboard to monitor the list of protected and unprotected VMs. For all other SnapCenter plug-in (application-based plug-ins) operations like backup and restore and job monitoring, you use the SnapCenter GUI.

To protect VMs and datastores, you use the VMware vSphere client interface. The web client GUI integrates with NetApp snapshot technology on the storage system. This enables you to back up VMs and datastores in seconds and restore VMs without taking an ESXi host offline.

There is also a management GUI to perform administrative operations on the SnapCenter Plug-in for VMware vSphere.

The following table shows the operations that the SnapCenter GUI performs.

| Use this GUI...                                      | To perform these operations...                                                                                                                                      | And to access these backups...                                     |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| SnapCenter vSphere client GUI                        | VM and datastore backup<br>VMDK attach and detach<br>Datastore mount and unmount<br>VM and VMDK restore<br>Guest file and folder restore                            | Backups of VMs and datastores using the VMware vSphere client GUI. |
| SnapCenter GUI                                       | Backup and restore of databases and applications on VMs, including protecting databases for Microsoft SQL Server, Microsoft Exchange, and Oracle.<br>Database clone | Backups performed using the SnapCenter GUI.                        |
| SnapCenter Plug-in for VMware vSphere management GUI | Modify the network configuration<br>Generate a support bundle<br>Modify NTP server settings<br>Disable/enable the plug-in                                           | N.A.                                                               |
| vCenter GUI                                          | Add SCV roles to vCenter Active Directory users<br>Add resource access to users or groups                                                                           | N.A.                                                               |

For VM-consistent backup and restore operations, you must use the VMware vSphere client GUI. Although it is possible to perform some operations using VMware tools, for example, mounting or renaming a datastore, those operations will not be registered in the SnapCenter repository and are not recognized.

SnapCenter does not support single snapshots of databases and VMs together. Backups for VMs and databases must be scheduled and run independently, which creates separate snapshots even if the databases and VMs are hosted in the same volume. Application-based backups must be scheduled by using the SnapCenter GUI; VM-consistent backups must be scheduled by using the VMware vSphere client GUI.

## Licensing

SnapCenter Plug-in for VMware vSphere is a free product if you are using the following storage systems:

- On-premises ONTAP clusters (FAS, AFF, and ASA systems)
- Cloud Volumes ONTAP
- ONTAP Select

It is recommended, but not required, that you add SnapCenter Standard licenses to secondary destinations. If SnapCenter Standard licenses are not enabled on secondary systems, you cannot use SnapCenter after performing a failover operation. However, a FlexClone license on secondary storage is required to perform mount and attach operations. A SnapRestore license is required to perform restore operations.

## Role-Based Access Control (RBAC)

SnapCenter Plug-in for VMware vSphere provides an additional level of RBAC for managing virtualized resources. The plug-in supports both vCenter Server RBAC and

## ONTAP RBAC.

SnapCenter and ONTAP RBAC applies only to SnapCenter Server application-consistent (application over VMDK) jobs. If you use the SnapCenter Plug-in for VMware vSphere to support SnapCenter application-consistent jobs, you must assign the SnapCenterAdmin role; you cannot change the permissions of the SnapCenterAdmin role.

SnapCenter Plug-in for VMware vSphere ships with predefined vCenter roles. You must use the vCenter GUI to add these roles to vCenter Active Directory users to perform SnapCenter operations.

You can create and modify roles and add resource access to users at any time. However, when you are setting up the SnapCenter Plug-in for VMware vSphere for the first time, you should at least add Active Directory users or groups to roles, and then add resource access to those users or groups.

## Types of RBAC for SnapCenter Plug-in for VMware vSphere users

If you are using the SnapCenter Plug-in for VMware vSphere, the vCenter Server provides an additional level of RBAC. The plug-in supports both vCenter Server RBAC and ONTAP RBAC.

### vCenter Server RBAC

This security mechanism applies to all jobs performed by the SnapCenter Plug-in for VMware vSphere, which includes VM-consistent, VM crash-consistent, and SnapCenter Server application-consistent (application over VMDK) jobs. This level of RBAC restricts the ability of vSphere users to perform SnapCenter Plug-in for VMware vSphere tasks on vSphere objects, such as virtual machines (VMs) and datastores.

SnapCenter Plug-in for VMware vSphere deployment creates the following roles for SnapCenter operations on vCenter:

```
SCV Administrator
SCV Backup
SCV Guest File Restore
SCV Restore
SCV View
```

The vSphere administrator sets up vCenter Server RBAC by doing the following:

- Setting the vCenter Server permissions on the root object (also known as the root folder). You can then refine the security by restricting child entities that do not need those permissions.
- Assigning the SCV roles to Active Directory users.

At a minimum, all users must be able to view vCenter objects. Without this privilege, users cannot access the VMware vSphere client GUI.

## ONTAP RBAC


This security mechanism applies only to SnapCenter Server application-consistent (application over VMDK) jobs. This level restricts the ability of SnapCenter to perform specific storage operations, such as backing up storage for datastores, on a specific storage system.

Use the following workflow to set up ONTAP and SnapCenter RBAC:

1. The storage administrator creates a role on the storage VM with the necessary privileges.
2. Then the storage administrator assigns the role to a storage user.
3. The SnapCenter administrator adds the storage VM to the SnapCenter Server, using that storage username.
4. Then the SnapCenter administrator assigns roles to SnapCenter users.

### Validation workflow for RBAC privileges

The following figure provides an overview of the validation workflow for RBAC privileges (both vCenter and ONTAP):

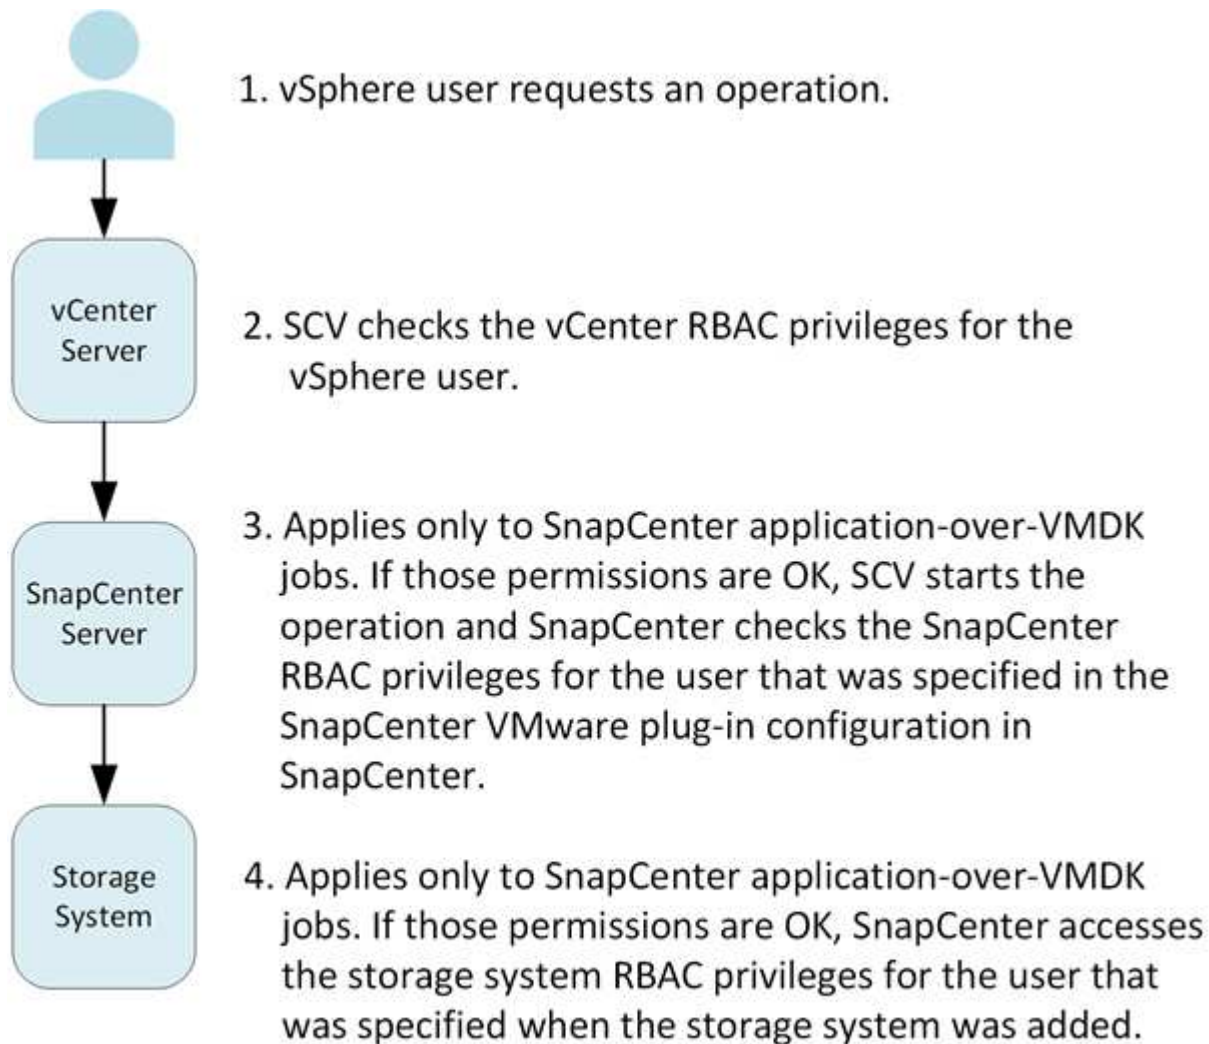

\*SCV=SnapCenter Plug-in for VMware vSphere

## ONTAP RBAC features in SnapCenter Plug-in for VMware vSphere



ONTAP RBAC applies only to SnapCenter Server application-consistent (application over VMDK) jobs.

ONTAP role-based access control (RBAC) enables you to control access to specific storage systems and the actions a user can perform on those storage systems. SnapCenter Plug-in for VMware vSphere works with vCenter Server RBAC, SnapCenter RBAC (when needed to support application-based operations), and ONTAP RBAC to determine which SnapCenter tasks a specific user can perform on objects on a specific storage system.

SnapCenter uses the credentials that you set up (username and password) to authenticate each storage system and determine which operations can be performed on that storage system. SnapCenter Plug-in for VMware vSphere uses one set of credentials for each storage system. These credentials determine all tasks that can be performed on that storage system; in other words, the credentials are for SnapCenter, not an individual SnapCenter user.

ONTAP RBAC applies only to accessing storage systems and performing SnapCenter tasks related to storage, such as backing up VMs. If you do not have the appropriate ONTAP RBAC privileges for a specific storage system, you cannot perform any tasks on a vSphere object hosted on that storage system.

Each storage system has one set of ONTAP privileges associated with it.

Using both ONTAP RBAC and vCenter Server RBAC provides the following benefits:

- Security

The administrator can control which users can perform which tasks on both a fine-grained vCenter Server object level and a storage system level.

- Audit information

In many cases, SnapCenter provides an audit trail on the storage system that lets you track events back to the vCenter user who performed the storage modifications.

- Usability

You can maintain controller credentials in one place.

## Predefined roles packaged with SnapCenter Plug-in for VMware vSphere

To simplify working with vCenter Server RBAC, the SnapCenter Plug-in for VMware vSphere provides a set of predefined roles that enable users to perform SnapCenter tasks. There is also a read-only role that allows users to view SnapCenter information, but not perform any tasks.

The predefined roles have both the required SnapCenter-specific privileges and the native vCenter Server privileges to ensure that tasks are completed correctly. In addition, the roles are set up to have the necessary privileges across all supported versions of vCenter Server.

As an administrator, you can assign these roles to the appropriate users.



SnapCenter Plug-in for VMware vSphere returns these roles to their default values (initial set of privileges) each time you restart the vCenter web client service or modify your installation. If you upgrade the SnapCenter Plug-in for VMware vSphere, the predefined roles are automatically upgraded to work with that version of the plug-in.

You can see the predefined roles in the vCenter GUI by selecting **Menu > Administration > Roles** as shown in the following table.

| Role                   | Description                                                                                                                                                                                                                                                                                                                               |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCV Administrator      | Provides all native vCenter Server and SnapCenter-specific privileges necessary to perform all SnapCenter Plug-in for VMware vSphere tasks. Beginning with SCV 6.1 release, a new privilege to create secondary protection is added to this role.                                                                                         |
| SCV Backup             | Provides all native vCenter Server and SnapCenter-specific privileges necessary to back up vSphere objects (virtual machines and datastores). The user also has access to the configure privilege. The user cannot restore backups. Beginning with SCV 6.1 release, a new privilege to create secondary protection is added to this role. |
| SCV Guest File Restore | Provides all native vCenter Server and SnapCenter-specific privileges necessary to restore guest files and folders. The user cannot restore VMs or VMDKs.                                                                                                                                                                                 |
| SCV Restore            | Provides all native vCenter Server and SnapCenter-specific privileges necessary to restore vSphere objects that have been backed up using the SnapCenter Plug-in for VMware vSphere and to restore guest files and folders. The user also has access to the configure privilege. The user cannot back up vSphere objects.                 |
| SCV View               | Provides read-only access to all the SnapCenter Plug-in for VMware vSphere backups, resource groups, and policies.                                                                                                                                                                                                                        |

## How to configure ONTAP RBAC for SnapCenter Plug-in for VMware vSphere

ONTAP RBAC applies only to SnapCenter Server application-consistent (application over VMDK) jobs.



Beginning with SnapCenter Plug-in for VMware (SCV) 5.0, you need to add applications of type HTTP and ONTAPI as user login methods for any ONTAP users with customized role-based access to the SCV. Without access to these applications, backups will fail. You need to restart the SCV service to recognize changes to ONTAP user login methods. For information on creating or modifying login accounts, refer to [Worksheets for administrator authentication and RBAC configuration](#).

You must configure ONTAP RBAC on the storage system if you want to use it with the SnapCenter Plug-in for

VMware vSphere. From within ONTAP, you must perform the following tasks:

- Create a single role.

#### [Administrator authentication and RBAC](#)

- Create a username and password (storage system credentials) in ONTAP for the role.

This storage system credential is needed to allow you to configure the storage systems for the SnapCenter Plug-in for VMware vSphere. You do this by entering the credentials in the plug-in. Each time you log in to a storage system using these credentials, you are presented with the set of SnapCenter functions that you set up in ONTAP when you created the credentials.

You can use the administrator or root login to access all the SnapCenter tasks; however, it is a good practice to use the RBAC feature provided by ONTAP to create one or more custom accounts with limited access privileges.

For more information, refer to [Minimum ONTAP privileges required](#).

## Copyright information

Copyright © 2025 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

## Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.