



Concepts

SnapCenter Software 6.0

NetApp
November 06, 2025

This PDF was generated from https://docs.netapp.com/us-en/snapcenter-60/concept/concept_snapcenter_overview.html on November 06, 2025. Always check docs.netapp.com for the latest.

Table of Contents

- Concepts 1
 - SnapCenter overview 1
 - SnapCenter architecture 3
 - SnapCenter components 4
 - SnapCenter Server 5
 - SnapCenter plug-ins 6
 - SnapCenter repository 9
- Security features 9
 - CA Certificate Overview 10
 - Two-way SSL communication 10
 - Certificate based authentication Overview 10
 - Multi-factor authentication (MFA) 10
- SnapCenter role-based access control (RBAC) 11
 - Types of RBAC 11
 - RBAC permissions and roles 12
 - Pre-defined SnapCenter roles and permissions 14
- SnapCenter Disaster Recovery 17
- Resources, resource groups, and policies 18
- Prescripts and postscripts 19
 - Supported script types 19
 - Script path 20
 - Where to specify scripts 20
 - Script timeouts 20
 - Script output 20
- SnapCenter Automation using REST APIs 20

Concepts

SnapCenter overview

SnapCenter Software is a simple, centralized, scalable platform that provides application-consistent data protection for applications, databases, host file systems, and VMs running on ONTAP systems anywhere in the Hybrid Cloud.

SnapCenter leverages NetApp Snapshot, SnapRestore, FlexClone, SnapMirror, and SnapVault technologies to provide the following:

- Fast, space-efficient, application-consistent, disk-based backups
- Rapid, granular restore, and application-consistent recovery
- Quick, space-efficient cloning

SnapCenter includes both SnapCenter Server and individual lightweight plug-ins. You can automate deployment of plug-ins to remote application hosts, schedule backup, verification, and clone operations, and monitor all data protection operations.

SnapCenter can be deployed in the following ways:

- On premise to protect the following:
 - Data that is on ONTAP FAS, AFF, or All SAN Array (ASA) primary systems and replicated to ONTAP FAS, AFF, or ASA secondary systems
 - Data that is on ONTAP Select primary systems
 - Data that is on ONTAP FAS, AFF, or ASA primary and secondary systems and protected to local StorageGRID object storage
- On premise in a Hybrid Cloud to protect the following:
 - Data that is on ONTAP FAS, AFF, or ASA primary systems and replicated to Cloud Volumes ONTAP
 - Data that is on ONTAP FAS, AFF, or ASA primary and secondary systems and protected to object and archive storage in cloud using NetApp backup and recovery integration
- In a public cloud to protect the following:
 - Data that is on Cloud Volumes ONTAP (formerly ONTAP Cloud) primary systems
 - Data that is on Amazon FSX for ONTAP
 - Data that is on primary Azure NetApp Files (Oracle, Microsoft SQL, and SAP HANA)

SnapCenter includes the following key features:

- Centralized, application-consistent data protection

Data protection is supported for Microsoft Exchange Server, Microsoft SQL Server, Oracle Databases on Linux or AIX, SAP HANA database, IBM Db2, PostgreSQL, MySQL, and Windows Host Filesystems running on ONTAP systems. SnapCenter also supports protection of applications such as MongoDB, Storage, MaxDB, Sybase ASE, and ORASCPM.

- Policy-based backups

Policy-based backups leverage NetApp Snapshot technology to create fast, space-efficient, application-consistent, disk-based backups. Optionally, you can automate protection of these backups to secondary storage by updates to existing protection relationships.

- Back ups for multiple resources

You can back up multiple resources (applications, databases, or host file systems) of the same type, at the same time, by using SnapCenter resource groups.

- Restore and recovery

SnapCenter provides rapid, granular restores of backups and application-consistent, time-based recovery. You can restore from any destination in the Hybrid Cloud.

- Cloning

SnapCenter provides quick, space-efficient, application-consistent cloning, which enables accelerated software development. You can clone on any destination in the Hybrid Cloud.

- Single user management graphical user interface (GUI)

The SnapCenter GUI provides a single, one-stop interface for managing backups and clones of a resource in any destination in the Hybrid Cloud.

- REST APIs, Windows cmdlets, UNIX commands

SnapCenter includes REST APIs for most functionality for integration with any orchestration software, and use of Windows PowerShell cmdlets and command-line interface.

For more information on REST APIs see [REST API overview](#).

For more information on Windows cmdlets see [SnapCenter Software Cmdlet Reference Guide](#).

For more information on UNIX commands see [SnapCenter Software Command Reference Guide](#).

- Centralized data protection Dashboard and reporting
- Role-Based Access Control (RBAC) for security and delegation.
- Repository database with High Availability

SnapCenter provides a built-in repository database with High Availability to store all backup metadata.

- Automated push install of plug-ins

You can automate a remote push of SnapCenter plug-ins from the SnapCenter Server host to application hosts.

- High Availability

High availability for SnapCenter is set up using external load balancer (F5). Up to two nodes are supported within the same datacenter.

- Disaster Recovery (DR)

You can recover the SnapCenter Server in the event of disasters like resource corruption or server crash.

- SnapLock

SnapLock is a high-performance compliance solution for organizations that use write once, read many (WORM) storage to retain files in unmodified form for regulatory and governance purposes.

For more information on SnapLock refer [What SnapLock is](#)

- SnapMirror active sync (initially released as SnapMirror Business Continuity [SM-BC])

SnapMirror active sync enables business services to continue operating even through a complete site failure, supporting applications to fail over transparently using a secondary copy. Neither manual intervention nor additional scripting is required to trigger a failover with SnapMirror active sync.

The plug-ins supported for this feature are SnapCenter Plug-in for SQL Server, SnapCenter Plug-in for Windows, SnapCenter Plug-in for Oracle database, SnapCenter Plug-in for SAP HANA database, SnapCenter Plug-in for Microsoft Exchange Server, and SnapCenter Plug-in for Unix.



To support host initiator proximity in SnapCenter, it's value, either source or destination should be set in ONTAP.

SnapMirror active sync functionality not supported in SnapCenter:

- If you convert the existing asymmetric SnapMirror active sync workloads to symmetric by changing the policy on the SnapMirror active sync relationships from *automatedfailover* to *automatedfailoverduplex* in ONTAP, the same is not supported in SnapCenter.
- If there are backups of a resource group (already protected in SnapCenter) and then storage policy is changed on the SnapMirror active sync relationships from *automatedfailover* to *automatedfailoverduplex* in ONTAP, the same is not supported in SnapCenter.

For more information on SnapMirror active sync refer [SnapMirror active sync overview](#)

For SnapMirror active sync, ensure that you have met the various hardware, software, and system configuration requirements. For more information refer [Prerequisites](#)

- Synchronous mirroring


The Synchronous mirroring feature provides online, real-time data replication between storage arrays over a remote distance.

For more information on Sync mirror refer [Synchronous mirroring overview](#)

SnapCenter architecture

The SnapCenter platform is based on a multitiered architecture that includes a centralized management server (SnapCenter Server) and a SnapCenter plug-in host.

SnapCenter supports multisite data center. The SnapCenter Server and the plug-in host can be at different geographical locations.

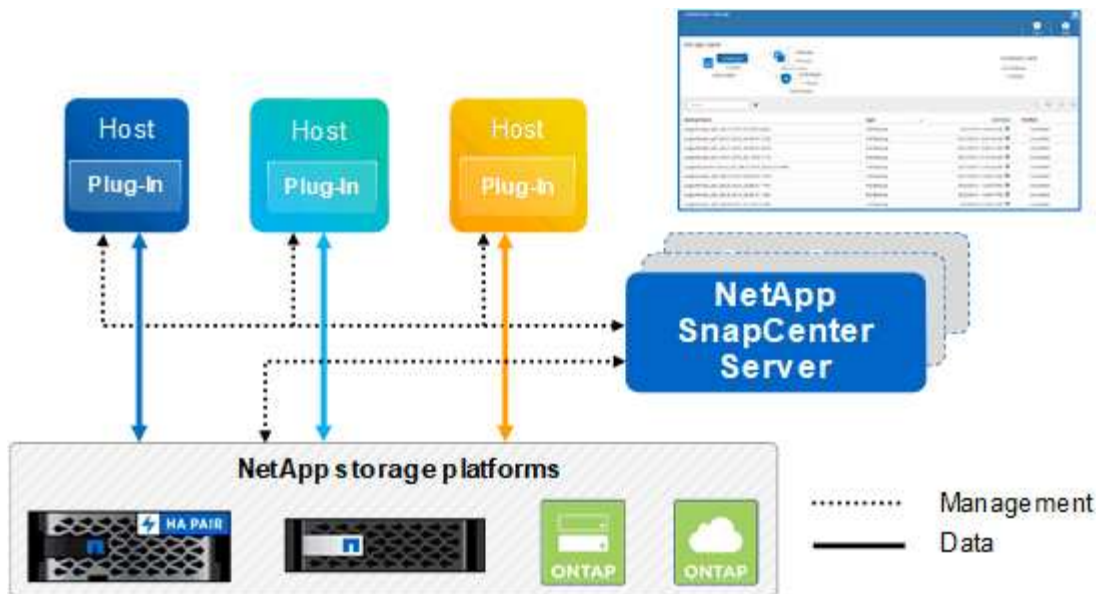

SnapCenter components

SnapCenter consists of the SnapCenter Server and SnapCenter plug-ins. You should install only the plug-ins that are appropriate for the data you want to protect.

- SnapCenter Server
- SnapCenter Plug-ins Package for Windows, which includes the following plug-ins:
 - SnapCenter Plug-in for Microsoft SQL Server
 - SnapCenter Plug-in for Microsoft Windows
 - SnapCenter Plug-in for Microsoft Exchange Server
 - SnapCenter Plug-in for SAP HANA Database
 - SnapCenter Plug-in for IBM Db2
 - SnapCenter Plug-in for PostgreSQL
 - SnapCenter Plug-in for MySQL
 - SnapCenter Plug-in for MongoDB
 - SnapCenter Plug-in for ORASCPM (Oracle Applications)
 - SnapCenter Plug-in for SAP ASE
 - SnapCenter Plug-in for SAP MaxDB
 - SnapCenter Plug-in for Storage plug-in
- SnapCenter Plug-ins Package for Linux, which includes the following plug-ins:
 - SnapCenter Plug-in for Oracle Database
 - SnapCenter Plug-in for SAP HANA Database
 - SnapCenter Plug-in for UNIX file systems
 - SnapCenter Plug-in for IBM Db2
 - SnapCenter Plug-in for PostgreSQL
 - SnapCenter Plug-in for MySQL

- SnapCenter Plug-in for MongoDB
- SnapCenter Plug-in for ORASCPM (Oracle Applications)
- SnapCenter Plug-in for SAP ASE
- SnapCenter Plug-in for SAP MaxDB
- SnapCenter Plug-in for Storage plug-in
- SnapCenter Plug-ins Package for AIX, which includes the following plug-ins:
 - SnapCenter Plug-in for Oracle Database
 - SnapCenter Plug-in for UNIX file systems
 - SnapCenter Plug-in for IBM Db2

SnapCenter Plug-in for VMware vSphere, formerly NetApp Data Broker, is a standalone virtual appliance that supports SnapCenter data protection operations on virtualized databases and file systems.

SnapCenter Server

The SnapCenter Server includes a web server, a centralized HTML5-based user interface, PowerShell cmdlets, REST APIs, and the SnapCenter repository.

SnapCenter Server supports both Microsoft Windows and Linux (RHEL 8.x, RHEL 9.x, SLES 15 SP5)

If you are using the SnapCenter Plug-ins Package for Linux or the SnapCenter Plug-ins Package for AIX, schedules are executed centrally using the Quartz scheduler.

- For SnapCenter Plug-in for Oracle Database, the host agent that runs on the SnapCenter Server host communicates with the SnapCenter Plug-in Loader (SPL) that runs on the Linux or AIX host to perform different data protection operations.
- For SnapCenter Plug-in for SAP HANA Database, the SnapCenter Server communicates with the plug-in through the SCCore agent that runs on the host.

The SnapCenter Server and plug-ins communicate with the host agent using HTTPS. Information about SnapCenter operations is stored in the SnapCenter repository.



SnapCenter supports disjoint namespace for Windows hosts. If you face issues when using disjoint namespace, refer to [SnapCenter is unable to discover resources when using disjoint namespace](#).

You should run the following commands to know the status of the SnapCenter components running on Linux host:

- `systemctl status snapmanagerweb`
- `systemctl status scheduler`
- `systemctl status smcore`
- `systemctl status nginx`
- `systemctl status rabbitmq-server`

SnapCenter plug-ins

Each SnapCenter plug-in supports specific environments, databases, and applications.

Plug-in name	Included in install package	Requires other plug-ins	Installed on host	Platform supported
Plug-in for SQL Server	Plug-ins Package for Windows	Plug-in for Windows	SQL Server host	Windows
Plug-in for Windows	Plug-ins Package for Windows		Windows host	Windows
Plug-in for Exchange	Plug-ins Package for Windows	Plug-in for Windows	Exchange Server host	Windows
Plug-in for Oracle Database	Plug-ins Package for Linux and Plug-ins Package for AIX	Plug-in for UNIX	Oracle host	Linux or AIX
Plug-in for SAP HANA Database	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	HDBSQL client host	Linux or Windows
Plug-in for IBM Db2	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	Db2 host	Linux or Windows
Plug-in for PostgreSQL	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	PostgreSQL host	Linux or Windows
Plug-in for MySQL	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	Db2MySQL host	Linux or Windows
Plug-in for MongoDB	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	MongoDB host	Linux or Windows
Plug-in for ORASCPM (Oracle Applications)	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	Oracle host	Linux or Windows

Plug-in name	Included in install package	Requires other plug-ins	Installed on host	Platform supported
Plug-in for SAP ASE	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	SAP host	Linux or Windows
Plug-in for SAP MaxDB	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	SAP MaxDB host	Linux or Windows
Plug-in for Storage plug-in	Plug-ins Package for Linux and Plug-ins Package for Windows	Plug-in for UNIX or Plug-in for Windows	Storage host	Linux or Windows



The SnapCenter Plug-in for VMware vSphere supports crash-consistent and VM-consistent backup and restore operations for virtual machines (VMs), datastores, and Virtual Machine Disks (VMDKs), and it supports the SnapCenter application-specific plug-ins to protect application-consistent backup and restore operations for virtualized databases and file systems.

For SnapCenter 4.1.1 users, the SnapCenter Plug-in for VMware vSphere 4.1.1 documentation has information on protecting virtualized databases and file systems. For SnapCenter 4.2.x users, the NetApp Data Broker 1.0 and 1.0.1, documentation has information on protecting virtualized databases and file systems using the SnapCenter Plug-in for VMware vSphere that is provided by the Linux-based NetApp Data Broker virtual appliance (Open Virtual Appliance format). For users using SnapCenter 4.3 or later, the [SnapCenter Plug-in for VMware vSphere documentation](#) has information on protecting virtualized databases and file systems using the Linux-based SnapCenter Plug-in for VMware vSphere virtual appliance (Open Virtual Appliance format).

SnapCenter Plug-in for Microsoft SQL Server features

- Automates application-aware backup, restore, and clone operations for Microsoft SQL Server databases in your SnapCenter environment.
- Supports Microsoft SQL Server databases on VMDK and raw device mapping (RDM) LUNs when you deploy the SnapCenter Plug-in for VMware vSphere and register the plug-in with SnapCenter
- Supports provisioning SMB shares only. Support is not provided for backing up SQL Server databases on SMB shares.
- Supports importing backups from SnapManager for Microsoft SQL Server to SnapCenter.

SnapCenter Plug-in for Microsoft Windows features

- Enables application-aware data protection for other plug-ins that are running in Windows hosts in your SnapCenter environment
- Automates application-aware backup, restore, and clone operations for Microsoft file systems in your SnapCenter environment
- Supports storage provisioning, Snapshot consistency, and space reclamation for Windows hosts



The Plug-in for Windows provisions SMB shares and Windows file systems on physical and RDM LUNs but does not support backup operations for Windows file systems on SMB shares.

SnapCenter Plug-in for Microsoft Exchange Server features

- Automates application-aware backup and restore operations for Microsoft Exchange Server databases and Database Availability Groups (DAGs) in your SnapCenter environment
- Supports virtualized Exchange Servers on RDM LUNs when you deploy the SnapCenter Plug-in for VMware vSphere and register the plug-in with SnapCenter

SnapCenter Plug-in for Oracle Database features

- Automates application-aware backup, restore, recovery, verify, mount, unmount, and clone operations for Oracle databases in your SnapCenter environment
- Supports Oracle databases for SAP, however, SAP BR*Tools integration is not provided

SnapCenter Plug-in for UNIX features

- Enables the Plug-in for Oracle Database to perform data protection operations on Oracle databases by handling the underlying host storage stack on Linux or AIX systems
- Supports Network File System (NFS) and storage area network (SAN) protocols on a storage system that is running ONTAP.
- For Linux systems, Oracle databases on VMDK and RDM LUNs is supported when you deploy the SnapCenter Plug-in for VMware vSphere and register the plug-in with SnapCenter.
- Supports Mount Guard for AIX on SAN filesystems and LVM layout.
- Supports Enhanced Journaled File System (JFS2) with inline logging on SAN filesystems and LVM layout for AIX systems only.

SAN native devices, filesystems, and LVM layouts built on SAN devices are supported.

- Automates application-aware backup, restore, and clone operations for UNIX file systems in your SnapCenter environment

SnapCenter Plug-in for SAP HANA Database features

Automates application-aware backup, restore, and cloning of SAP HANA databases in your SnapCenter environment.

NetApp supported plug-ins features

NetApp supported plug-ins are MongoDB, ORASCPM (Oracle Applications), SAP ASE, SAP MaxDB, and Storage plug-in.

- Supports other plug-ins to manage applications or databases that are not supported by other SnapCenter plug-ins. NetApp supported plug-ins are not provided as part of the SnapCenter installation.
- Supports creating mirror copies of backup sets on another volume and performing disk-to-disk backup replication.
- Supports both Windows and Linux environments.

SnapCenter Plug-in for IBM Db2

Automates application-aware backup, restore, and cloning of IBM Db2 databases in your SnapCenter environment.

SnapCenter Plug-in for PostgreSQL

Automates application-aware backup, restore, and cloning of PostgreSQL instances in your SnapCenter environment.

SnapCenter Plug-in for MySQL

Automates application-aware backup, restore, and cloning of MySQL instances in your SnapCenter environment.

SnapCenter repository

The SnapCenter repository, sometimes referred to as the NSM database, stores information and metadata for every SnapCenter operation.

MySQL Server repository database is installed by default when you install the SnapCenter Server. If MySQL Server is already installed and you are doing a fresh installation of SnapCenter Server, you should uninstall MySQL Server.

SnapCenter supports MySQL Server 8.0.37 or later as the SnapCenter repository database. If you were using an earlier version of MySQL Server with an earlier release of SnapCenter, during SnapCenter upgrade, the MySQL Server is upgraded to 8.0.37 or later.

The SnapCenter repository stores the following information and metadata:

- Backup, clone, restore, and verification metadata
- Reporting, job, and event information
- Host and plug-in information
- Role, user, and permission details
- Storage system connection information

Security features

SnapCenter employs strict security and authentication features to enable you to keep your data secure.

SnapCenter includes the following security features:

- All communication to SnapCenter uses HTTP over SSL (HTTPS).
- All credentials in SnapCenter are protected using Advanced Encryption Standard (AES) encryption.
- SnapCenter uses security algorithms that are compliant with the Federal Information Processing Standard (FIPS).
- SnapCenter supports using the authorized CA certificates provided by the customer.
- SnapCenter 4.1.1 or later supports Transport Layer Security (TLS) 1.2 for communication with ONTAP. You can also use TLS 1.2 for communication between clients and servers.

From 5.0, SnapCenter supports (TLS) 1.3 for communication with ONTAP.

- SnapCenter supports a certain set of SSL Cipher suites to provide security across network communication.

For more information, see [How to configure supported SSL Cipher Suite](#).

- SnapCenter is installed inside your company's firewall to enable access to the SnapCenter Server and to enable communication between the SnapCenter Server and the plug-ins.
- SnapCenter API and operation access uses tokens encrypted with AES encryption, which expire after 24 hours.
- SnapCenter integrates with Windows Active Directory for login and role-based access control (RBAC) that govern access permissions.
- IPsec is supported with SnapCenter on ONTAP for Windows and Linux host machines. [Learn more](#).
- SnapCenter PowerShell cmdlets are session secured.
- After a default period of 15 minutes of inactivity, SnapCenter warns you that you will be logged out in 5 minutes. After 20 minutes of inactivity, SnapCenter logs you out, and you must log in again. You can modify the log out period.
- Login is temporarily disabled after 5 or more incorrect login attempts.
- Supports CA certificate authentication between SnapCenter Server and ONTAP. [Learn more](#).
- Integrity Verifier is added to the SnapCenter Server and the plug-ins and it validates all the shipped binaries during fresh installation and upgrade operations.

CA Certificate Overview

The SnapCenter Server installer enables the Centralized SSL Certificate Support during installation. To enhance the secured communication between the server and the plug-in, SnapCenter supports using the authorized CA certificates provided by the customer.

You should deploy CA certificates after installing the SnapCenter Server and the respective plug-ins. For more information, see [Generate CA Certificate CSR file](#).

You can also deploy CA certificate for SnapCenter plug-in for VMware vSphere. For more information, see [Create and import certificates](#).

Two-way SSL communication

Two-way SSL communication secures the mutual communication between SnapCenter Server and the plug-ins.

Certificate based authentication Overview

Certificate based authentication verifies the authenticity of respective users who try to access the SnapCenter plug-in host. User should export the SnapCenter Server certificate without private key and import it in the plug-in host trusted store. Certificate based authentication works only if the two-way SSL feature is enabled.

Multi-factor authentication (MFA)

MFA uses a third-party Identity Provider (IdP) via the Security Assertion Markup Language (SAML) to manage user sessions. This functionality enhances the authentication security by having an option to use multiple factors such as TOTP, biometrics, push notifications etc. along with the existing username & password. Also, it

enables the customer to use their own user identity providers to get unified user login (SSO) across their portfolio.

MFA is applicable only for SnapCenter Server UI login. The logins are authenticated through the IdP Active Directory Federation Services (AD FS). You can configure various authentication factors at AD FS. SnapCenter is the service provider and you should configure SnapCenter as a relying party in AD FS. To enable MFA in SnapCenter, you will require the AD FS metadata.

For information to enable MFA, see [Enable Multi-factor authentication](#).

SnapCenter role-based access control (RBAC)

Types of RBAC

SnapCenter role-based access control (RBAC) and ONTAP permissions enable SnapCenter administrators to delegate control of SnapCenter resources to different users or groups of users. This centrally managed access empowers application administrators to work securely within delegated environments.

You can create and modify roles, and add resource access to users at any time, but when you are setting up SnapCenter for the first time, you should at least add Active Directory users or group to roles, and then add resource access to those users or groups.



You cannot use SnapCenter to create user or group accounts. You should create user or group accounts in Active Directory of the operating system or database.

SnapCenter uses the following types of role-based access control:

- SnapCenter RBAC
- SnapCenter plug-in RBAC (for some plug-ins)
- Application-level RBAC
- ONTAP permissions

SnapCenter RBAC

Roles and permissions

SnapCenter ships with predefined roles with permissions already assigned. You can assign users or groups of users to these roles. You can also create new roles and manage permissions and users.

Assigning permissions to users or groups

You can assign permissions to users or groups to access SnapCenter objects such as hosts, storage connections, and resource groups. You cannot change the permissions of the SnapCenterAdmin role.

You can assign RBAC permissions to users and groups within the same forest and to users belonging to different forests. You cannot assign RBAC permissions to users belonging to nested groups across forests.



If you create a custom role, it must contain all of the permissions of the SnapCenter Admin role. If you only copy some of the permissions, for example, Host add or Host remove, you cannot perform those operations.

Authentication

Users are required to provide authentication during login, through the graphical user interface (GUI) or using PowerShell cmdlets. If users are members of more than one role, after entering login credentials, they are prompted to specify the role they want to use. Users are also required to provide authentication to run the APIs.

Application-level RBAC

SnapCenter uses credentials to verify that authorized SnapCenter users also have application-level permissions.

For example, if you want to perform Snapshot and data protection operations in a SQL Server environment, you must set credentials with the proper Windows or SQL credentials. The SnapCenter Server authenticates the credentials set using either method. If you want to perform Snapshot and data protection operations in a Windows file system environment on ONTAP storage, the SnapCenter admin role must have admin privileges on the Windows host.

Similarly, if you want to perform data protection operations on an Oracle database and if the operating system (OS) authentication is disabled in the database host, you must set credentials with the Oracle database or Oracle ASM credentials. The SnapCenter Server authenticates the credentials set using one of these methods depending on the operation.

SnapCenter Plug-in for VMware vSphere RBAC

If you are using the SnapCenter VMware plug-in for VM-consistent data protection, the vCenter Server provides an additional level of RBAC. The SnapCenter VMware plug-in supports both vCenter Server RBAC and Data ONTAP RBAC.

For information, see [SnapCenter Plug-in for VMware vSphere RBAC](#)

ONTAP permissions

You should create vsadmin account with required permissions to access the storage system.

For information to create the account and assign permissions, see [Create an ONTAP cluster role with minimum privileges](#)

RBAC permissions and roles

SnapCenter role-based access control (RBAC) enables you to create roles and assign permissions to those roles, and then assign users or groups of users to the roles. This enables SnapCenter administrators to create a centrally managed environment, while application administrators can manage data protection jobs. SnapCenter ships with some predefined roles and permissions.

SnapCenter roles

SnapCenter ships with the following predefined roles. You can either assign users and groups to these roles or create new roles.

When you assign a role to a user, only jobs that are relevant to that user are visible in the Jobs page unless you assigned the SnapCenter Admin role.

- App Backup and Clone Admin
- Backup and Clone Viewer
- Infrastructure Admin
- SnapCenterAdmin

SnapCenter Plug-in for VMware vSphere roles

For managing VM-consistent data protection of VMs, VMDKs, and datastores, the following roles are created in vCenter by the SnapCenter Plug-in for VMware vSphere:

- SCV Administrator
- SCV View
- SCV Backup
- SCV Restore
- SCV Guest File Restore

For more information, see [Types of RBAC for SnapCenter Plug-in for VMware vSphere users](#)

Best Practice: NetApp recommends that you create one ONTAP role for SnapCenter Plug-in for VMware vSphere operations and assign it all the required privileges.

SnapCenter permissions

SnapCenter provides the following permissions:

- Resource Group
- Policy
- Backup
- Host
- Storage Connection
- Clone
- Provision (only for Microsoft SQL database)
- Dashboard
- Reports
- Restore
- Resource

Plug-in privileges are required from the administrator for non-administrators to perform resource discovery operation.

- Plug-in Install or Uninstall



When you enable Plug-in Installation permissions, you must also modify the Host permission to enable reads and updates.

- Migration

- Mount (only for Oracle database)
- Unmount (only for Oracle database)
- Job Monitor

Job Monitor permission enables members of different roles to see the operations on all the objects to which they are assigned.

Pre-defined SnapCenter roles and permissions

SnapCenter ships with pre-defined roles, each with a set of permissions already enabled. When setting up and administering role-based access control (RBAC), you can either use these pre-defined roles or create new ones.

SnapCenter includes the following pre-defined roles:

- SnapCenter Admin role
- App Backup and Clone Admin role
- Backup and Clone Viewer role
- Infrastructure Admin role

When you add a user to a role, you must assign either the StorageConnection permission to enable storage virtual machine (SVM) communication, or assign an SVM to the user to enable permission to use the SVM. The Storage Connection permission enables users to create SVM connections.

For example, a user with the SnapCenter Admin role can create SVM connections and assign them to a user with the App Backup and Clone Admin role, which by default does not have permission to create or edit SVM connections. Without an SVM connection, users cannot complete any backup, clone, or restore operations.

SnapCenter Admin role

The SnapCenter Admin role has all permissions enabled. You cannot modify the permissions for this role. You can add users and groups to the role or remove them.

App Backup and Clone Admin role

The App Backup and Clone Admin role has the permissions required to perform administrative actions for application backups and clone-related tasks. This role does not have permissions for host management, provisioning, storage connection management, or remote installation.

Permissions	Enabled	Create	Read	Update	Delete
Resource Group	Not applicable	Yes	Yes	Yes	Yes
Policy	Not applicable	Yes	Yes	Yes	Yes
Backup	Not applicable	Yes	Yes	Yes	Yes
Host	Not applicable	Yes	Yes	Yes	Yes

Permissions	Enabled	Create	Read	Update	Delete
Storage Connection	Not applicable	No	Yes	No	No
Clone	Not applicable	Yes	Yes	Yes	Yes
Provision	Not applicable	No	Yes	No	No
Dashboard	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Reports	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Restore	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Resource	Yes	Yes	Yes	Yes	Yes
Plug-in Install/Uninstall	No	Not applicable		Not applicable	Not applicable
Migration	No	Not applicable	Not applicable	Not applicable	Not applicable
Mount	Yes	Yes	Not applicable	Not applicable	Not applicable
Unmount	Yes	Yes	Not applicable	Not applicable	Not applicable
Full Volume Restore	No	No	Not applicable	Not applicable	Not applicable
Job Monitor	Yes	Not applicable	Not applicable	Not applicable	Not applicable

Backup and Clone Viewer role

The Backup and Clone Viewer role has read-only view of all permissions. This role also has permissions enabled for discovery, reporting, and access to the Dashboard.

Permissions	Enabled	Create	Read	Update	Delete
Resource Group	Not applicable	No	Yes	No	No
Policy	Not applicable	No	Yes	No	No
Backup	Not applicable	No	Yes	No	No
Host	Not applicable	No	Yes	No	No

Permissions	Enabled	Create	Read	Update	Delete
Storage Connection	Not applicable	No	Yes	No	No
Clone	Not applicable	No	Yes	No	No
Provision	Not applicable	No	Yes	No	No
Dashboard	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Reports	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Restore	No	No	Not applicable	Not applicable	Not applicable
Resource	No	No	Yes	Yes	No
Plug-in Install/Uninstall	No	Not applicable	Not applicable	Not applicable	Not applicable
Migration	No	Not applicable	Not applicable	Not applicable	Not applicable
Mount	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Unmount	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Full Volume Restore	No	Not applicable	Not applicable	Not applicable	Not applicable
Job Monitor	Yes	Not applicable	Not applicable	Not applicable	Not applicable

Infrastructure Admin role

The Infrastructure Admin role has permissions enabled for host management, storage management, provisioning, resource groups, remote installation reports, and access to the Dashboard.

Permissions	Enabled	Create	Read	Update	Delete
Resource Group	Not applicable	Yes	Yes	Yes	Yes
Policy	Not applicable	No	Yes	Yes	Yes
Backup	Not applicable	Yes	Yes	Yes	Yes
Host	Not applicable	Yes	Yes	Yes	Yes

Permissions	Enabled	Create	Read	Update	Delete
Storage Connection	Not applicable	Yes	Yes	Yes	Yes
Clone	Not applicable	No	Yes	No	No
Provision	Not applicable	Yes	Yes	Yes	Yes
Dashboard	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Reports	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Restore	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Resource	Yes	Yes	Yes	Yes	Yes
Plug-in Install/Uninstall	Yes	Not applicable	Not applicable	Not applicable	Not applicable
Migration	No	Not applicable	Not applicable	Not applicable	Not applicable
Mount	No	Not applicable	Not applicable	Not applicable	Not applicable
Unmount	No	Not applicable	Not applicable	Not applicable	Not applicable
Full Volume Restore	No	No	Not applicable	Not applicable	Not applicable
Job Monitor	Yes	Not applicable	Not applicable	Not applicable	Not applicable

SnapCenter Disaster Recovery

You can recover the SnapCenter Server in the event of disasters like resource corruption or server crash using the SnapCenter disaster recovery (DR) feature. You can recover SnapCenter repository, server schedules, and server configuration components. You can also recover the SnapCenter Plug-in for SQL Server and SnapCenter Plug-in for SQL Server storage.

This section describes the two types of disaster recovery (DR) in SnapCenter:

SnapCenter Server DR

- SnapCenter Server data is backed up and can be recovered without any plug-in added to or managed by the SnapCenter Server.
- Secondary SnapCenter Server should be installed on the same installation directory and on the same port as the primary SnapCenter Server.

- For Multi-factor authentication (MFA), during Snapcenter Server DR, close all the browser tabs and reopen a browser to login again. This will clear the existing or active session cookies and update that the correct configuration data.
- SnapCenter disaster recovery functionality uses REST APIs to backup SnapCenter Server. See [REST API workflows for disaster recovery of SnapCenter Server](#).
- Audit settings related configuration file is not backed up in DR backup and neither on the DR server after restore operation. You should manually repeat the Audit log settings.

SnapCenter Plug-in and Storage DR

DR is supported only for SnapCenter Plug-in for SQL Server. When the SnapCenter Plug-in for SQL Server is down, switch to a different SQL host and recover the data by performing few steps. See [Disaster recovery of SnapCenter Plug-in for SQL Server](#).

SnapCenter uses ONTAP SnapMirror technology to replicate data. It can be used to replicate data to a secondary site for DR and keep it in sync. A failover can be initiated by breaking the replication relationship in SnapMirror. During failback the synchronization can be reversed and data from the DR site can be replicated back to the primary location.

Resources, resource groups, and policies

Before you use SnapCenter, it is helpful to understand basic concepts related to the backup, clone, and restore operations you want to perform. You interact with resources, resource groups, and policies for different operations.

- **Resources** are typically databases, Windows file systems, or file shares that you back up or clone with SnapCenter.

However, depending on your environment, resources might be database instances, Microsoft SQL Server availability groups, Oracle databases, Oracle RAC databases, Windows file systems, or a group of custom applications.

- A **resource group** is a collection of resources on a host or cluster. The resource group can also contain resources from multiple hosts and multiple clusters.

When you perform an operation on a resource group, you perform that operation on all the resources defined in the resource group according to the schedule you specify for the resource group.

You can back up on demand a single resource or a resource group. You also can configure scheduled backups for single resources and resource groups.



If you put one host of a shared resource group on maintenance mode, and if there are schedules associated with the same shared resource group, all the scheduled operations will be suspended for all of the other hosts of the shared resource group.

You should use a database plug-in to back up databases, a file system plug-in to back up file systems, and the SnapCenter Plug-in for VMware vSphere to backup VMs and datastores.


- **Policies** specify the backup frequency, copy retention, replication, scripts, and other characteristics of data protection operations.

When you create a resource group, you select one or more policies for that group. You can also select a policy when you perform a backup on demand.


Think of a resource group as defining *what* you want to protect and when you want to protect it in terms of day and time. Think of a policy as defining *how* you want to protect it. If you are backing up all databases or backing up all file systems of a host, for example, you might create a resource group that includes all the databases or all the file systems in the host. You could then attach two policies to the resource group: a daily policy and an hourly policy.

When you create the resource group and attach the policies, you might configure the resource group to perform a full backup daily and another schedule that performs log backups hourly.

The following image illustrates the relationship between resources, resource groups, and policies for databases:

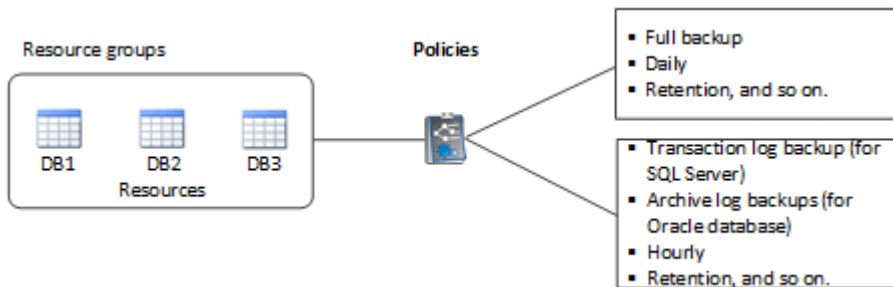

The following image illustrates the relationship between resources, resource groups, and policies for Windows file systems:

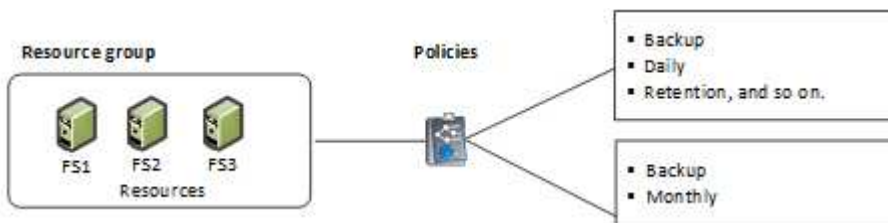

Prescripts and postscripts

You can use custom prescripts and postscripts as part of your data protection operations. These scripts enable automation either before your data protection job or after. For example, you might include a script that automatically notifies you of data protection job failures or warnings. Before you set up your prescripts and postscripts, you should understand some of the requirements for creating these scripts.

Supported script types

The following types of scripts are supported for Windows:

- Batch files
- PowerShell scripts
- Perl scripts

The following types of scripts are supported for UNIX:

- Perl scripts

- Python scripts
- Shell scripts



Along with default bash shell other shells like sh-shell, k-shell, and c-shell are also supported.

Script path

All prescripts and postscripts that are run as part of SnapCenter operations, on nonvirtualized and on virtualized storage systems, are executed on the plug-in host.

- The Windows scripts should be located on the plug-in host.



The prescripts or postscripts path should not include drives or shares. The path should be relative to the `SCRIPTS_PATH`.

- The UNIX scripts should be located on the plug-in host.



The script path is validated at the time of execution.

Where to specify scripts

Scripts are specified in backup policies. When a backup job is started, the policy automatically associates the script with the resources being backed up. When you create a backup policy, you can specify the prescript and postscript arguments.



You cannot specify multiple scripts.

Script timeouts

The timeout is set to 60 seconds, by default. You can modify the timeout value.

Script output

The default directory for the Windows prescripts and postscripts output files is `Windows\System32`.

There is no default location for the UNIX prescripts and postscripts. You can redirect the output file to any preferred location.

SnapCenter Automation using REST APIs

You can use REST APIs to perform several SnapCenter management operations. REST APIs are exposed through the Swagger web page. You can access the Swagger web page to display the REST API documentation, as well as to manually issue an API call. You can use REST APIs to help manage your SnapCenter Server or your SnapCenter vSphere host.

The REST APIs for...	Are located in...
SnapCenter Server	https://<SnapCenter_IP_address_or_name>:<SnapCenter_port>/swagger/
SnapCenter Plug-in for VMware vSphere	https://<OVA_IP_address_or_host_name>:<scv_plugin_port>/api/swagger-ui.html#

For information on SnapCenter REST APIs, see [Overview of REST APIs](#)

For information on SnapCenter Plug-in for VMware vSphere REST APIs, see [SnapCenter Plug-in for VMware vSphere REST APIs](#)

Copyright information

Copyright © 2025 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.