



Back up Windows file systems

SnapCenter software

NetApp
February 20, 2026

This PDF was generated from https://docs.netapp.com/us-en/snapcenter/protect-scw/reference_back_up_windows_file_systems.html on February 20, 2026. Always check docs.netapp.com for the latest.

Table of Contents

- Back up Windows file systems 1
 - Back up Windows file systems 1
 - Determine resource availability for Windows file systems 2
 - Create backup policies for Windows file systems 3
 - Create resource groups for Windows file systems 6
 - Create resource groups and enable secondary protection for Windows file systems on ASA r2 systems . . . 8
 - Create a storage system connection and a credential using PowerShell cmdlets 11
 - Back up a single resource on demand for Windows file systems 12
 - Back up resource groups for Windows file systems 16
 - Monitor backup operations 17
 - Monitor operations in the Activity pane 18
 - Cancel backup operations 18
 - View related backups and clones in the Topology page 19
 - Clean up the secondary backup count using PowerShell cmdlets 21


Back up Windows file systems


Back up Windows file systems

When you install the SnapCenter Plug-in for Microsoft Windows in your environment, you can use SnapCenter to back up Windows file systems. You can back up a single file system or a resource group that contains multiple file systems. You can back up on demand or according to a defined protection schedule.

You can schedule multiple backups to run across servers simultaneously. Backup and restore operations cannot be performed simultaneously on the same resource.

The following workflow shows the sequence in which you must perform the backup operations:

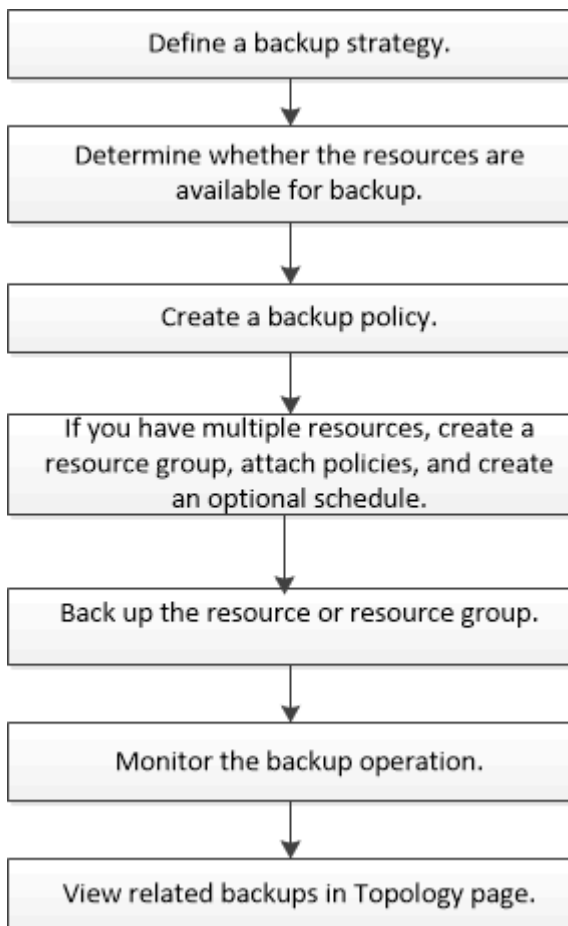

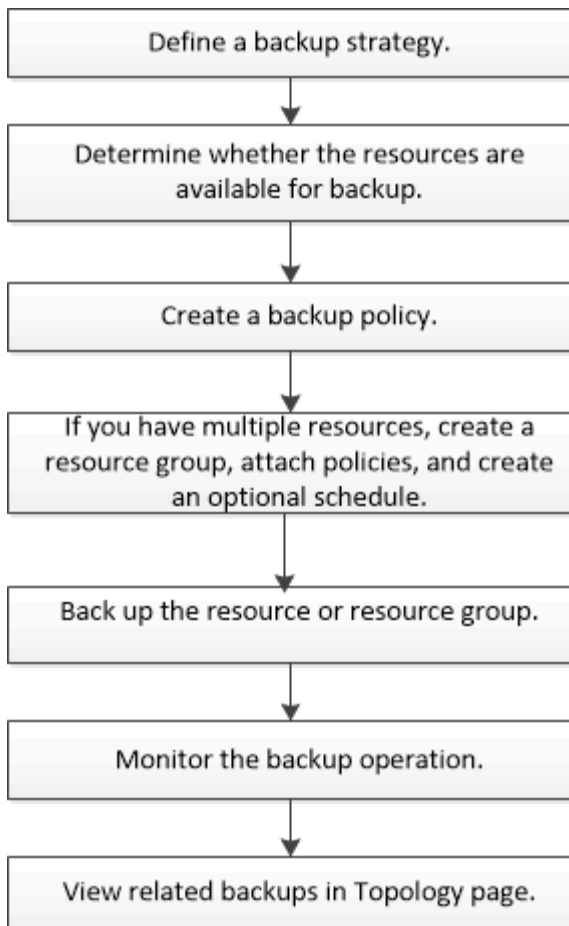

You can also use PowerShell cmdlets manually or in scripts to perform backup, restore, and clone operations. The SnapCenter cmdlet help or the [SnapCenter Software Cmdlet Reference Guide](#) contains detailed information about PowerShell cmdlets.

Determine resource availability for Windows file systems

Resources are the LUNs and similar components in your file system that are maintained by the plug-ins you have installed. You can add those resources to resource groups so that you can perform data protection jobs on multiple resources, but first you must identify which resources you have available. Discovering available resources also verifies that the plug-in installation was completed successfully.

Before you begin

- You must have already completed tasks such as installing SnapCenter Server, adding hosts, creating storage virtual machine (SVM) connections, and adding credentials.
- If files reside on VMware RDM LUNs or VMDKs, you must deploy the SnapCenter Plug-in for VMware vSphere and register the plug-in with SnapCenter. For more information, see [SnapCenter Plug-in for VMware vSphere documentation](#).

Steps

1. In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
2. In the Resources page, select **File Systems** from the list.
3. Select the host to filter the list of resources, and then click **Refresh Resources**.

The newly added, renamed, or deleted file systems are updated to the SnapCenter Server inventory.



You must refresh the resources if the databases are renamed outside of SnapCenter.

Create backup policies for Windows file systems

You can create a new backup policy for resources before you use SnapCenter to back up Windows file systems, or you can create a new backup policy at the time you create a resource group or when you back up a resource.

Before you begin

- You must have defined your backup strategy. [Learn more](#)
- You must have prepared for data protection.

To prepare for data protection, you must complete tasks such as installing SnapCenter, adding hosts, discovering resources, and creating storage virtual machine (SVM) connections.

- If you are replicating Snapshots to a mirror or vault secondary storage, the SnapCenter administrator must have assigned the SVMs to you for both the source and destination volumes.
- If you want to run the PowerShell scripts in prescripts and postscripts, you should set the value of the `usePowershellProcessforScripts` parameter to `true` in the `web.config` file.

The default value is `false`

- Review the SnapMirror active sync specific prerequisites and limitations. For information, refer [Object limits for SnapMirror active sync](#).

About this task

- The `SCRIPTS_PATH` is defined using the `PredefinedWindowsScriptsDirectory` key located in the `SMCoreServiceHost.exe.Config` file of the plug-in host.

If needed, you can change this path and restart `SMcore` service. It is recommended that you use the default path for security.

The value of the key can be displayed from swagger through the API: `API /4.7/configsettings`

You can use the GET API to display the value of the key. SET API is not supported.

- SnapLock
 - If 'Retain the backup copies for a specific number of days' option is selected, then the SnapLock retention period must be lesser than or equal to the mentioned retention days.
 - Specifying a Snapshot locking period prevents deletion of the Snapshots until the retention period expires. This could lead to retaining a larger number of Snapshots than the count specified in the policy.
 - For ONTAP 9.12.1 and below version, the clones created from the SnapLock Vault Snapshots as part of restore will inherit the SnapLock Vault expiry time. Storage admin should manually cleanup the clones post the SnapLock expiry time.

Steps

1. In the left navigation pane, select **Settings**.
2. In the Settings page, select **Policies**.
3. Select **New**.
4. In the Name page, enter the policy name and details.
5. In the Backup and Replication page, perform the following tasks:
 - a. Select a backup setting.

Option	Description
File System Consistent Backup	Choose this option if you want SnapCenter to quiesce the disk drive on which the file system resides before the backup operation begins and then resume the disk drive after the backup operation ends.
File System Crash-consistent Backup	Choose this option if you do not want SnapCenter to quiesce the disk drive on which the file system resides.

- b. Select a schedule frequency (also called a policy type).

The policy specifies the backup frequency only. The specific protection schedule for backing up is defined in the resource group. Therefore, two or more resource groups can share the same policy and backup frequency but have different backup schedules.



If you have scheduled for 2:00 a.m., the schedule will not be triggered during daylight saving time (DST).

- c. Select a policy label.

Depending on the Snapshot label that you select, ONTAP applies the secondary Snapshot retention policy that matches the label.



If you have selected **Update SnapMirror after creating a local Snapshot copy**, you can optionally specify the secondary policy label. However, if you have selected **Update SnapVault after creating a local Snapshot copy**, you should specify the secondary policy label.

6. In the Select secondary replication options section, select one or both of the following secondary replication options:

For this field...	Do this...
Update SnapMirror after creating a local Snapshot copy	<p>Select this option to create mirror copies of backup sets on another volume (SnapMirror).</p> <p>This option should be enabled for SnapSnapMirror active sync.</p> <p>During secondary replication, the SnapLock expiry time loads the primary SnapLock expiry time. Clicking the Refresh button in the Topology page refreshes the secondary and primary SnapLock expiry time that are retrieved from ONTAP.</p> <p>See View related backups and clones in the Topology page.</p>
Update SnapVault after creating a Snapshot copy	<p>Select this option to perform disk-to-disk backup replication.</p> <p>During secondary replication, the SnapLock expiry time loads the primary SnapLock expiry time. Clicking the Refresh button in the Topology page refreshes the secondary and primary SnapLock expiry time that are retrieved from ONTAP.</p> <p>When SnapLock is configured only on the secondary from ONTAP known as SnapLock Vault, clicking the Refresh button in the Topology page refreshes the locking period on the secondary that is retrieved from ONTAP.</p> <p>For more information on SnapLock Vault see Commit Snapshot copies to WORM on a vault destination</p>
Error retry count	Enter the number of replication attempts that should occur before the process halts.



You should configure SnapMirror retention policy in ONTAP for the secondary storage to avoid reaching the maximum limit of Snapshots on the secondary storage.

- In the Retention settings page, specify the retention settings for on-demand backups and for each schedule frequency you selected.

Option	Description
Total Snapshot copies to keep	Choose this option if you want to specify the number of Snapshots SnapCenter stores before automatically deleting them.

Option	Description
Keep Snapshot copies for	Choose this option if you want to specify the number of days SnapCenter retains a backup copy before deleting it.
Snapshot copy locking period	Select Snapshot locking period, and specify the duration days, months, or years. SnapLock retention period should be less than 100 years.



You should set the retention count to 2 or higher. The minimum value for the retention count is 2.



The maximum retention value is 1018. Backups will fail if retention is set to a value higher than what the ONTAP version supports.

- In the Script page, enter the path of the prescript or postscript that you want the SnapCenter Server to run before or after the backup operation, respectively and a time limit that SnapCenter waits for the script to execute before timing out.

For example, you can run a script to update SNMP traps, automate alerts, and send logs.



The prescripts or postscripts path should not include drives or shares. The path should be relative to the SCRIPTS_PATH.

- Review the summary, and then click **Finish**.

Create resource groups for Windows file systems

A resource group is the container to which you can add multiple file systems that you want to protect. You must also attach one or more policies to the resource group to define the type of data protection job that you want to perform, and then specify the backup schedule.

About this task

- For ONTAP 9.12.1 and below version, the clones created from the SnapLock Vault Snapshots as part of restore will inherit the SnapLock Vault expiry time. Storage admin should manually cleanup the clones post the SnapLock expiry time.
- Adding new filesystems without SnapMirror active sync to an existing resource group which contains resources with SnapMirror active sync, is not supported.
- Adding new filesystems to an existing resource group in failover mode of SnapMirror active sync is not supported. You can add resources to the resource group only in regular or fail-back state.


Steps

- In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
- In the Resources page, select **File Systems** from the list.



If you have recently added a file system to SnapCenter, click **Refresh Resources** to view the newly added resource.

3. Click **New Resource Group**.
4. In the Name page in the wizard, do the following:

For this field...	Do this...
Name	Enter the resource group name.  The resource group name should not exceed 250 characters.
Use custom name format for Snapshot copy	Optional: Enter a custom Snapshot name and format. For example, customtext_resourcegroup_policy_hostname or resourcegroup_hostname. By default, a timestamp is appended to the Snapshot name.
Tag	Enter a descriptive tag to help when finding a resource group.

5. In the Resources page, perform the following tasks:

- a. Select the host to filter the list of resources.

If you have recently added resources, they will appear on the list of available resources only after you refresh your resource list.

- b. In the Available Resources section, click the file systems that you want to back up, and then click the right arrow to move them to the Added section.


If you select the **Autoselect all resources on same storage volume** option, all of the resources on the same volume are selected. When you move them to the Added section, all of the resources on that volume move together.

To add a single file system, clear the **Autoselect all resources on same storage volume** option and then select the file systems you want to move to the Added section.


6. In the Policies page, perform the following tasks:

- a. Select one or more policies from the drop-down list.

You can select any existing policy and click **Details** to determine whether you can use that policy.

If no existing policy meets your requirements, you can create a new policy by clicking  to start the policy wizard.

The selected policies are listed in the Policy column in the Configure schedules for selected policies section.

- b. In the Configure schedules for selected policies section, click  in the Configure Schedules column for the policy for which you want to configure the schedule.
- c. If the policy is associated with multiple schedule types (frequencies), select the frequency that you want to configure.
- d. In the Add schedules for policy *policy_name* dialog box, configure the schedule by specifying the start date, expiration date, and frequency, and then click **Finish**.

The configured schedules are listed in the Applied Schedules column in the Configure schedules for selected policies section.

Third party backup schedules are not supported when they overlap with SnapCenter backup schedules. You should not modify the schedules from the Windows task scheduler and SQL Server Agent.

7. In the Notification page, provide notification information, as follows:

For this field...	Do this...
Email preference	Select Always , On Failure , or On failure or warning , to send emails to recipients after creating backup resource groups, attaching policies, and configuring schedules. Enter the SMTP server, default email subject line, and the To and From email addresses.
From	Email address
To	Email to address
Subject	Default email subject line

8. Review the summary, and then click **Finish**.

You can perform a backup on demand or wait for the scheduled backup to occur.

Create resource groups and enable secondary protection for Windows file systems on ASA r2 systems

You should create the resource group to add the resources that are on ASA r2 systems. You can also provision the secondary protection while creating the resource group.

Before you begin

- You should ensure that you are not adding both ONTAP 9.x resources and ASA r2 resources to the same resource group.
- You should ensure that you do not have a database with both ONTAP 9.x resources and ASA r2 resources.

About this task

- The secondary protection is available only if the logged-in user is assigned to the role that has the **SecondaryProtection** capability enabled.

- If you enabled secondary protection, the resource group is put into maintenance mode while creating the primary and secondary consistency groups. After the primary and secondary consistency groups are created, the resource group is put out of maintenance mode.
- SnapCenter does not support secondary protection for a clone resource.

Steps

1. In the left navigation pane, select **Resources**, and the appropriate plug-in from the list.
2. In the Resources page, click **New Resource Group**.
3. In the Name page, perform the following actions:
 - a. Enter a name for the resource group in the Name field.



The resource group name should not exceed 250 characters.

- b. Enter one or more labels in the Tag field to help you search for the resource group later.

For example, if you add HR as a tag to multiple resource groups, you can later find all resource groups associated with the HR tag.

- c. Select this check box, and enter a custom name format that you want to use for the Snapshot name.

For example, customtext_resource group_policy_hostname or resource group_hostname. By default, a timestamp is appended to the Snapshot name.

- d. Specify the destinations of the archive log files that you do not want to back up.



You should use the exact same destination as it was set in the application including prefix, if needed.

4. In the Resources page, select the database host name from the **Host** drop-down list.




The resources are listed in the Available Resources section only if the resource is discovered successfully. If you have recently added resources, they will appear on the list of available resources only after you refresh your resource list.

5. Select the ASA r2 resources from the Available Resources section and move them to the Selected Resources section.
6. In the Application Settings page, select the backup option.
7. In the Policies page, perform the following steps:
 - a. Select one or more policies from the drop-down list.



You can also create a policy by clicking .

In the Configure schedules for selected policies section, the selected policies are listed.

- b. Click  in the Configure Schedules column for the policy for which you want to configure a schedule.

c. In the Add schedules for policy *policy_name* window, configure the schedule, and then click **OK**.

Where, *policy_name* is the name of the policy that you have selected.

The configured schedules are listed in the Applied Schedules column.

Third party backup schedules are not supported when they overlap with SnapCenter backup schedules.

8. If the secondary protection is enabled for the policy that you have selected, then Secondary Protection page is displayed and you need to perform the following steps:

a. Select the type of the replication policy.



Synchronous replication policy is not supported.

b. Specify the consistency group suffix that you want to use.

c. From the Destination Cluster and Destination SVM drop-downs select the peered cluster and SVM that you want to use.



The cluster and SVM peering is not supported by SnapCenter. You should use System Manager or ONTAP CLIs to perform cluster and SVM peering.



If the resources are already protected outside of SnapCenter, those resources will be displayed in the Secondary Protected Resources section.

1. On the Verification page, perform the following steps:

a. Click **Load locators** to load the SnapMirror or SnapVault volumes to perform verification on secondary storage.

b. Click  in the Configure Schedules column to configure the verification schedule for all the schedule types of the policy.

c. In the Add Verification Schedules *policy_name* dialog box, perform the following actions:

If you want to...	Do this...
Run verification after backup	Select Run verification after backup .
Schedule a verification	Select Run scheduled verification and then select the schedule type from the drop-down list.

d. Select **Verify on secondary location** to verify your backups on secondary storage system.

e. Click **OK**.

The configured verification schedules are listed in the Applied Schedules column.

2. In the Notification page, from the **Email preference** drop-down list, select the scenarios in which you want to send the emails.

You must also specify the sender and receiver email addresses, and the subject of the email. If you want to attach the report of the operation performed on the resource group, select **Attach Job Report**.



For email notification, you must have specified the SMTP server details using either the GUI or the PowerShell command `Set-SmSmtServer`.

3. Review the summary, and then click **Finish**.

Create a storage system connection and a credential using PowerShell cmdlets

You must create a storage virtual machine (SVM) connection and a credential before using PowerShell cmdlets to perform data protection operations.

Before you begin

- You should have prepared the PowerShell environment to execute the PowerShell cmdlets.
- You should have the required permissions in the Infrastructure Admin role to create storage connections.
- You should ensure that the plug-in installations are not in progress.

Host plug-in installations must not be in progress while adding a storage system connection because the host cache might not be updated and databases status might be displayed in the SnapCenter GUI as “Not available for backup” or “Not on NetApp storage”.

- Storage system names should be unique.

SnapCenter does not support multiple storage systems with the same name on different clusters. Each storage system that is supported by SnapCenter should have a unique name and a unique management LIF IP address.

Steps

1. Initiate a PowerShell Core connection session by using the `Open-SmConnection` cmdlet.

This example opens a PowerShell session:

```
PS C:\> Open-SmConnection
```

2. Create a new connection to the storage system by using the `Add-SmStorageConnection` cmdlet.

This example creates a new storage system connection:

```
PS C:\> Add-SmStorageConnection -Storage test_vs1 -Protocol Https  
-Timeout 60
```

3. Create a new credential by using the `Add-SmCredential` cmdlet.

This example creates a new credential named `FinanceAdmin` with Windows credentials:

```
PS C:> Add-SmCredential -Name FinanceAdmin -AuthMode Windows  
-Credential sddev\administrator
```

The information regarding the parameters that can be used with the cmdlet and their descriptions can be obtained by running *Get-Help command_name*. Alternatively, you can also refer to the [SnapCenter Software Cmdlet Reference Guide](#).

Back up a single resource on demand for Windows file systems

If a resource is not in a resource group, you can back up the resource on demand from the Resources page.

About this task

If you want to back up a resource that has a SnapMirror relationship with secondary storage, the role assigned to the storage user should include the “snapmirror all” privilege. However, if you are using the “vsadmin” role, then the “snapmirror all” privilege is not required.



When backing up a file system, SnapCenter does not back up LUNs that are mounted on a volume mount point (VMP) in the file system that is being backed up.



If you are working in a Windows file system context, do not back up database files. Doing so creates an inconsistent backup and a possible loss of data when restoring. To protect database files, you must use the appropriate SnapCenter plug-in for the database (for example, SnapCenter Plug-in for Microsoft SQL Server or SnapCenter Plug-in for Microsoft Exchange Server).

SnapCenter UI

Steps

1. In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
2. In the Resources page, select the File System resource type, and then select the resource that you want to back up.
3. If the File System - Protect wizard does not start automatically, click **Protect** to start the wizard.

Specify the protection settings, as described in the Creating resource groups tasks.

4. Optional: In the Resource page of the wizard, enter a custom name format for the Snapshot.


For example, `customtext_resourcegroup_policy_hostname` or `resourcegroup_hostname`. By default, a timestamp is appended to the Snapshot name.

5. In the Policies page, perform the following tasks:

- a. Select one or more policies from the drop-down list.


You can select any existing policy, and then click **Details** to determine whether you can use that policy.

If no existing policy meets your requirements, you can copy an existing policy and modify it or you

can create a new policy by clicking  to start the policy wizard. If no existing policy meets your requirements, you can copy an existing policy and modify it or you can create a new policy by

clicking  to start the policy wizard.

The selected policies are listed in the Policy column in the Configure schedules for selected policies section.

- b. In the Configure schedules for selected policies section, click  in the Configure Schedules column for the policy for which you want to configure the schedule.

- c. In the Add schedules for policy *policy_name* dialog box, configure the schedule by specifying the start date, expiration date, and frequency, and then click **Finish**.

The configured schedules are listed in the Applied Schedules column in the Configure schedules for selected policies section.

[Scheduled operations might fail](#)

6. In the Notification page, perform the following tasks:

For this field...	Do this...
Email preference	Select Always , or On Failure , or On failure or warning , to send emails to recipients after creating backup resource groups, attaching policies, and configuring schedules. Enter the SMTP server information, default email subject line, and the “To” and “From” email addresses.
From	Email address
To	Email to address
Subject	Default email subject line

7. Review the summary, and then click **Finish**.

The database topology page is displayed.

8. Click **Back up Now**.

9. In the Backup page, perform the following steps:

- a. If you have applied multiple policies to the resource, from the Policy drop-down list, select the policy that you want to use for backup.

If the policy selected for the on-demand backup is associated with a backup schedule, the on-demand backups will be retained based on the retention settings specified for the schedule type.

- b. Click **Backup**.

10. Monitor the operation progress by clicking **Monitor > Jobs**.

PowerShell cmdlets

Steps

1. Initiate a connection session with the SnapCenter Server for a specified user by using the Open-SmConnection cmdlet.

```
Open-smconnection -SMSbaseurl https://snapctr.demo.netapp.com:8146
```

The username and password prompt is displayed.

2. Create a backup policy by using the Add-SmPolicy cmdlet.

This example creates a new backup policy with a SQL backup type of FullBackup:

```
PS C:\> Add-SmPolicy -PolicyName TESTPolicy
-PluginPolicyType SCSQL -PolicyType Backup
-SqlBackupType FullBackup -Verbose
```

This example creates a new backup policy with a Windows file system backup type of **CrashConsistent**:

```
PS C:\> Add-SmPolicy -PolicyName FileSystemBackupPolicy
-PluginPolicyType SCW -PolicyType Backup
-ScwBackupType CrashConsistent -Verbose
```

3. Discover host resources by using the `Get-SmResources` cmdlet.

This example discovers the resources for the Microsoft SQL plug-in on the specified host:

```
C:\PS>PS C:\> Get-SmResources -HostName vise-f6.sddev.mycompany.com
-PluginCode SCSQL
```

This example discovers the resources for Windows file systems on the specified host:

```
C:\PS>PS C:\> Get-SmResources -HostName vise2-f6.sddev.mycompany.com
-PluginCode SCW
```

4. Add a new resource group to SnapCenter by using the `Add-SmResourceGroup` cmdlet.

This example creates a new SQL database backup resource group with the specified policy and resources:

```
PS C:\> Add-SmResourceGroup -ResourceGroupName AccountingResource
-Resources @{"Host"="visef6.org.com";
"Type"="SQL Database";"Names"="vise-f6\PayrollDatabase"}
-Policies "BackupPolicy"
```

This example creates a new Windows file system backup resource group with the specified policy and resources:

```
PS C:\> Add-SmResourceGroup -ResourceGroupName EngineeringResource
-PluginCode SCW -Resources @{"Host"="WIN-VOK20IKID5I";
"Type"="Windows Filesystem";"Names"="E:\"}
-Policies "EngineeringBackupPolicy"
```

5. Initiate a new backup job by using the `New-SmBackup` cmdlet.

```
PS C:> New-SmBackup -ResourceGroupName PayrollDataset -Policy FinancePolicy
```

6. View the status of the backup job by using the `Get-SmBackupReport` cmdlet.

This example displays a job summary report of all jobs that were run on the specified date:

```
PS C:\> Get-SmJobSummaryReport -Date '1/27/2016'
```

The information regarding the parameters that can be used with the cmdlet and their descriptions can be obtained by running `Get-Help command_name`. Alternatively, you can also refer to the [SnapCenter Software Cmdlet Reference Guide](#).

Back up resource groups for Windows file systems

A resource group is a collection of resources on a host or cluster. A backup operation on the resource group is performed on all resources defined in the resource group. You can back up a resource group on demand from the Resources page. If a resource group has a policy attached and a schedule configured, then backups occur automatically according to the schedule.

Before you begin

- You must have created a resource group with a policy attached.
- If you want to back up a resource that has a SnapMirror relationship to secondary storage, the role assigned to the storage user should include the “snapmirror all” privilege. However, if you are using the “vsadmin” role, then the “snapmirror all” privilege is not required.
- If a resource group has multiple databases from different hosts, the backup operation on some of the hosts might trigger late because of network issues. You should configure the value of `MaxRetryForUninitializedHosts` in `web.config` by using the `Set-SmConfigSettings PowerShell` cmdlet





When backing up a file system, SnapCenter does not back up LUNs that are mounted on a volume mount point (VMP) in the file system that is being backed up.



If you are working in a Windows file system context, do not back up database files. Doing so creates an inconsistent backup and a possible loss of data when restoring. To protect database files, you must use the appropriate SnapCenter plug-in for the database (for example, SnapCenter Plug-in for Microsoft SQL Server or SnapCenter Plug-in for Microsoft Exchange Server).

Steps

1. In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
2. In the Resources page, select **Resource Group** from the **View** list.

You can search the resource group either by entering the resource group name in the search box or by clicking  and selecting the tag. You can then click  to close the filter pane.

3. In the Resource Groups page, select the resource group that you want to back up, and then click **Back up Now**.



For SnapCenter Plug-in for Oracle Database, if you have a federated resource group with two databases and one of the database has datafile on a non-NetApp storage, the backup operation is aborted even though the other database is on a NetApp storage.

4. In the Backup page, perform the following steps:
 - a. If you have associated multiple policies with the resource group, from the **Policy** drop-down list, select the policy that you want to use for backup.

If the policy selected for the on-demand backup is associated with a backup schedule, the on-demand backups will be retained based on the retention settings specified for the schedule type.

- b. Click **Backup**.

5. Monitor the operation progress by clicking **Monitor > Jobs**.

- In MetroCluster configurations, SnapCenter might not be able to detect a protection relationship after a failover.

[Unable to detect SnapMirror or SnapVault relationship after MetroCluster failover](#)







- If you are backing up application data on VMDKs and the Java heap size for the SnapCenter Plug-in for VMware vSphere is not large enough, the backup might fail. To increase the Java heap size, locate the script file `/opt/netapp/init_scripts/scvservice`. In that script, the `do_start` method command starts the SnapCenter VMware plug-in service. Update that command to the following: `Java -jar -Xmx8192M -Xms4096M`.

Monitor backup operations


You can monitor the progress of different backup operations by using the SnapCenterJobs page. You might want to check the progress to determine when it is complete or if there is an issue.

About this task


The following icons appear on the Jobs page and indicate the corresponding state of the operations:

-  In progress
-  Completed successfully
-  Failed
-  Completed with warnings or could not start due to warnings
-  Queued
-  Canceled

Steps

1. In the left navigation pane, click **Monitor**.
2. In the Monitor page, click **Jobs**.
3. In the Jobs page, perform the following steps:
 - a. Click  to filter the list so that only backup operations are listed.
 - b. Specify the start and end dates.
 - c. From the **Type** drop-down list, select **Backup**.
 - d. From the **Status** drop-down, select the backup status.
 - e. Click **Apply** to view the operations completed successfully.
4. Select a backup job, and then click **Details** to view the job details.



Though the backup job status displays , when you click on job details you might see that some of the child tasks of the backup operation are still in progress or marked with warning signs.

5. In the Job Details page, click **View logs**.


The **View logs** button displays the detailed logs for the selected operation.

Monitor operations in the Activity pane

The Activity pane displays the five most recent operations performed. The Activity pane also displays when the operation was initiated and the status of the operation.

The Activity pane displays information regarding backup, restore, clone, and scheduled backup operations.

Steps

1. In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
2. Click  on the Activity pane to view the five most recent operations.

When you click one of the operations, the operation details are listed in the **Job Details** page.

Cancel backup operations


You can cancel backup operations that are queued.

What you will need

- You must be logged in as the SnapCenter Admin or job owner to cancel operations.
- You can cancel a backup operation from either the **Monitor** page or the **Activity** pane.
- You cannot cancel a running backup operation.
- You can use the SnapCenter GUI, PowerShell cmdlets, or CLI commands to cancel the backup operations.
- The **Cancel Job** button is disabled for operations that cannot be canceled.
- If you selected **All members of this role can see and operate on other members objects** in Users\Groups page while creating a role, you can cancel the queued backup operations of other members while using that role.

Steps

1. Perform one of the following actions:

From the...	Action
Monitor page	<ol style="list-style-type: none">a. In the left navigation pane, click Monitor > Jobs.b. Select the operation, and then click Cancel Job.
Activity pane	<ol style="list-style-type: none">a. After initiating the backup operation, click  on the Activity pane to view the five most recent operations.b. Select the operation.c. In the Job Details page, click Cancel Job.





The operation is canceled, and the resource is reverted to the previous state.

View related backups and clones in the Topology page

When you are preparing to back up or clone a resource, you can view a graphical representation of all backups and clones on the primary and secondary storage. In the Topology page, you can see all of the backups and clones that are available for the selected resource or resource group. You can view the details of those backups and clones, and then select them to perform data protection operations.

About this task

You can review the following icons in the Manage Copies view to determine whether the backups and clones are available on the primary or secondary storage (Mirror copies or Vault copies).




-  displays the number of backups and clones that are available on the primary storage.
-  displays the number of backups and clones that are mirrored on the secondary storage using SnapMirror technology.
 -  Clones of a backup of a version-flexible mirror on a mirror-vault type volume are displayed in the topology view but the mirror backup count in the topology view does not include the version-flexible backup.
-  displays the number of backups and clones that are replicated on the secondary storage using SnapVault technology.
 - The number of backups displayed includes the backups deleted from the secondary storage. For

example, if you have created 6 backups using a policy to retain only 4 backups, the number of backups displayed are 6.



Clones of a backup of a version-flexible mirror on a mirror-vault type volume are displayed in the topology view but the mirror backup count in the topology view does not include the version-flexible backup.

If you have secondary relationship as SnapMirror active sync (initially released as SnapMirror Business Continuity [SM-BC]), you can see following additional icons:

-  The replica site is up.
-  The replica site is down.
-  The secondary mirror or vault relationship has not been re-established.

Steps

1. In the left navigation pane, click **Resources**, and then select the appropriate plug-in from the list.
2. In the Resources page, either select the resource or resource group from the **View** drop-down list.
3. Select the resource either from the resource details view or from the resource group details view.

If the resource is protected, the topology page of the selected resource is displayed.

4. Review the Summary card to see a summary of the number of backups and clones available on the primary and secondary storage.

The Summary Card section displays the total number of backups and clones. For Oracle database only, the Summary Card section also displays the total number of log backups.

Clicking the **Refresh** button starts a query of the storage to display an accurate count.

If SnapLock enabled backup is taken, then clicking the **Refresh** button refreshes the primary and secondary SnapLock expiry time retrieved from ONTAP. A weekly schedule also refreshes the primary and secondary SnapLock expiry time retrieved from ONTAP.

When the application resource is spread across multiple volumes, the SnapLock expiry time for the backup will be the longest SnapLock expiry time that is set for a Snapshot in a volume. The longest SnapLock expiry time is retrieved from ONTAP.

For SnapMirror active sync, clicking the **Refresh** button refreshes the SnapCenter backup inventory by querying ONTAP for both primary and replica sites. A weekly schedule also performs this activity for all databases containing SnapMirror active sync relationship.

- For SnapMirror active sync and only for ONTAP 9.14.1, Async Mirror or Async MirrorVault relationships to the new primary destination should be manually configured after failover. From ONTAP 9.15.1 onwards Async Mirror or Async MirrorVault is auto configured to the new primary destination.
- After failover, a backup should be created for SnapCenter to be aware of the failover. You can click **Refresh** only after a backup has been created.

5. In the Manage Copies view, click **Backups** or **Clones** from the primary or secondary storage to see details of a backup or clone.

The details of the backups and clones are displayed in a table format.

6. Select the backup from the table, and then click the data protection icons to perform restore, clone, rename, and delete operations.




You cannot rename or delete backups that are on the secondary storage system.

7. If you want to delete a clone, then select the clone from the table and click  to delete the clone.

Example showing backups and clones on the primary storage

Manage Copies



Clean up the secondary backup count using PowerShell cmdlets

You can use the `Remove-SmBackup` cmdlet to clean up the backup count for secondary backups that have no Snapshot. You might want to use this cmdlet when the total Snapshots displayed in the Manage Copies topology do not match the secondary storage Snapshot retention setting.

You must have prepared the PowerShell environment to execute the PowerShell cmdlets.

The information regarding the parameters that can be used with the cmdlet and their descriptions can be obtained by running `Get-Help command_name`. Alternatively, you can also refer to the [SnapCenter Software Cmdlet Reference Guide](#).

Steps

1. Initiate a connection session with the SnapCenter Server for a specified user by using the `Open-SmConnection` cmdlet.

```
Open-SmConnection -SMSbaseurl https:\\snapctr.demo.netapp.com:8146/
```

2. Clean up secondary backups count using the `-CleanupSecondaryBackups` parameter.

This example cleans up the backup count for secondary backups with no Snapshots:

```
Remove-SmBackup -CleanupSecondaryBackups
```

```
Remove-SmBackup
```

```
Are you sure want to remove the backup(s).
```

```
[Y] Yes [A] Yes to All [N] No [L] No to All [S] Suspend [?] Help  
(default is "Y"):
```

Copyright information

Copyright © 2026 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.