



Monitoring cluster performance from the Performance Dashboard

OnCommand Unified Manager 9.5

NetApp
February 12, 2024

This PDF was generated from <https://docs.netapp.com/us-en/oncommand-unified-manager-95/performance-checker/concept-understanding-the-performance-panels-on-the-dashboard.html> on February 12, 2024. Always check docs.netapp.com for the latest.

Table of Contents

- Monitoring cluster performance from the Performance Dashboard 1
 - Understanding the Performance dashboard 1
 - Performance Dashboard cluster banner messages and descriptions 2
 - Changing the performance statistics collection interval 3


Monitoring cluster performance from the Performance Dashboard

The OnCommand System Manager Performance Dashboard displays the high-level performance status of all clusters being monitored by this instance of Unified Manager. It enables you to assess the overall performance of the managed clusters, and to quickly note, locate, or assign for resolution any specific events identified.

Understanding the Performance dashboard

The Unified Manager Performance dashboard provides a high-level overview of the performance status for all the clusters that are being monitored in your environment. Clusters that have performance issues are ordered at the top of the page by severity. The information on the dashboard is updated automatically at each five-minute performance collection period.

The following image shows an example of a Unified Manager Performance dashboard that is monitoring two clusters:

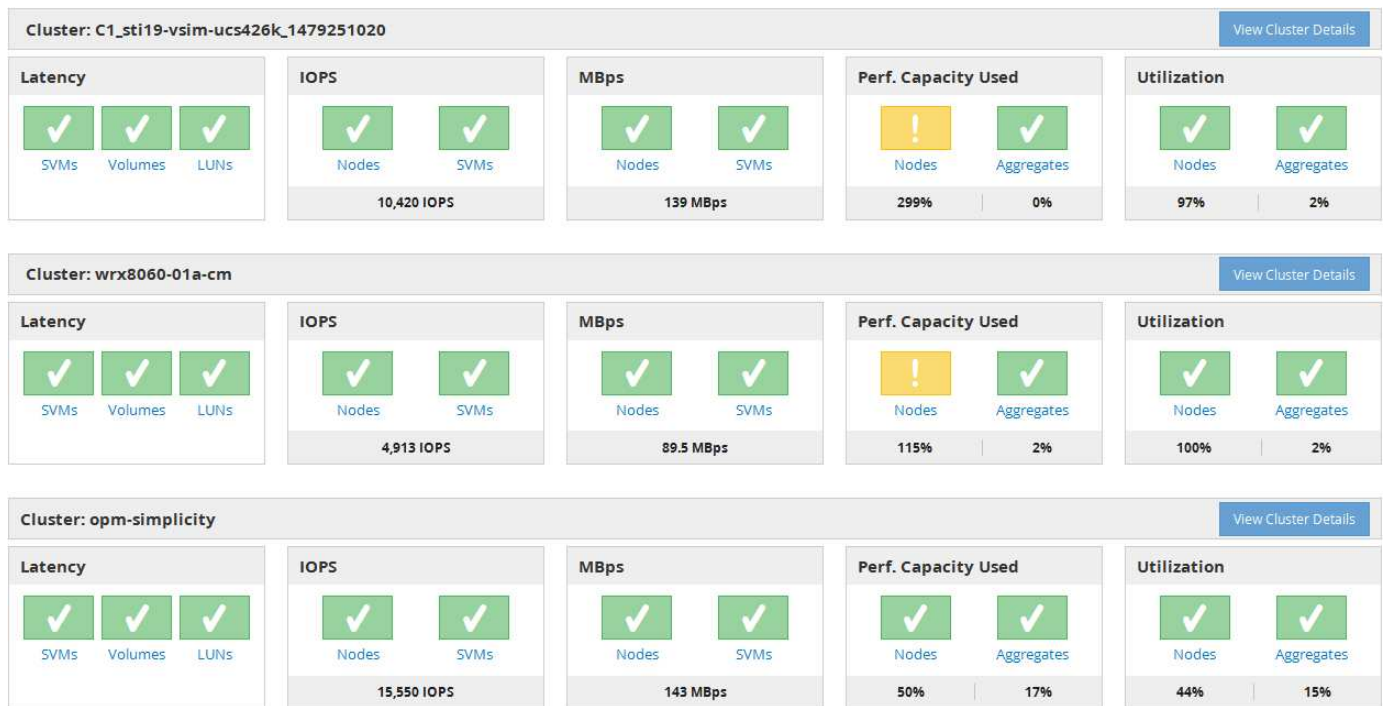

The status icons that represent the storage objects can be in the following states, sorted from highest severity to lowest severity:

- Critical (✖): One or more new critical performance events have been reported for the object.
- Warning (⚠): One or more new warning performance events have been reported for the object.
- Normal (✓): No new performance events have been reported for the object.



The color indicates whether new events exist for the object. Events that are no longer active, called obsolete events, do not affect the color of the icon.

Cluster performance counters

The following performance categories are displayed for each cluster:

- Latency

Shows how quickly the cluster is responding to client application requests, in milliseconds per operation.

- IOPS

Shows the operating speed of the cluster, in number of input/output operations per second.

- MBps

Shows how much data is being transferred to and from the cluster, in megabytes per second.

- Performance Capacity Used

Shows whether any nodes or aggregates are overusing their available performance capacity.

- Utilization

Shows whether the resources on any nodes or aggregates are being overused.

To analyze the performance of your cluster and storage objects, you can perform one of the following actions:

- You can click **View Cluster Details** to display the Cluster Landing page, where you can view detailed performance and event information for the selected cluster and storage objects.
- You can click one of the red or yellow status icons of an object to display the Inventory page for that object, where you can view details about the storage object.

For example, clicking a volume icon displays the Performance/Volume inventory page with a list of all the volumes in the selected cluster, sorted from worst performance to best performance.

Performance Dashboard cluster banner messages and descriptions

Unified Manager may display cluster banner messages on the Performance Dashboard to alert you to status issues for a particular cluster.

Banner message	Description	Resolution
No performance data is being collected from cluster <code>cluster_name</code> . Restart Unified Manager to correct this issue.	The Unified Manager collection service has stopped and no performance data is being collected from any clusters.	Restart Unified Manager to correct this issue. If this does not correct the issue, contact technical support.

Banner message	Description	Resolution
More than x hour(s) of historical data is being collected from cluster <code>cluster_name</code> . Current data collections will start after all historical data is collected.	A data continuity collection cycle is currently running to retrieve performance data outside of the real-time cluster performance collection cycle.	<p>No action is required. Current performance data will be collected after the data continuity collection cycle is completed.</p> <p>A data continuity collection cycle runs when a new cluster is added or when Unified Manager has been unable to collect current performance data for some reason.</p>

Changing the performance statistics collection interval

The default collection interval for performance statistics is 5 minutes. You can change this interval to 10 or 15 minutes if you find that collections from large clusters are not finishing within the default time. This setting affects the collection of statistics from all clusters that this instance of Unified Manager is monitoring.

Before you begin

You must have a user ID and password authorized to log in to the maintenance console of the Unified Manager server.

About this task

The issue of performance statistics collections not finishing on time is indicated by the banner messages `Unable to consistently collect from cluster <cluster_name>` or `Data collection is taking too long on cluster <cluster_name>`.

You should change the collection interval only when required because of a statistics collections issue. Do not change this setting for any other reason.



Changing this value from the default setting of 5 minutes can affect the number and frequency of performance events that Unified Manager reports. For example, system-defined performance thresholds trigger events when the policy is exceeded for 30 minutes. When using 5-minute collections, the policy must be exceeded for six consecutive collections. For 15-minute collections the policy must be exceeded for only two collection periods.

A message at the bottom of the Cluster Data Sources page indicates the current statistical data collection interval.

Steps

1. Log in using SSH as the maintenance user to the Unified Manager host.

The Unified Manager maintenance console prompts are displayed.

2. Type the number of the menu option labeled **Performance Polling Interval Configuration**, and then press Enter.

3. If prompted, enter the maintenance user password again.
4. Type the number for the new polling interval that you want to set, and then press Enter.

After you finish

If you changed the Unified Manager collection interval to 10 or 15 minutes, and you have a current connection to an external data provider (such as Graphite), you must change the data provider transmit interval so that it is equal to, or greater, than the Unified Manager collection interval.

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.